



# 5V, 5V Low Dropout Dual Regulator with RESET/ENABLE

## Description

The CS8135 is a low dropout, high current, dual 5V linear regulator. The secondary 5V/10mA output is often used for powering systems with standby memory. Quiescent current drain is less than 3mA when supplying 10mA loads from the standby regulator.

In automotive applications, the CS8135 and all regulated circuits are protected from reverse battery installations, as well as two-battery jumps. During line

transients, such as a 60V load dump, the 500mA output will automatically shut down the primary output to protect both internal circuits and the load. The standby regulator will continue to power any standby load.

The CS8135 is packaged in a 5 lead TO-220.

NOTE: The CS8135 is compatible with the LM2935.


## Features

- Two Regulated Outputs  
Primary Output 5V  
± 5%; 500mA  
Secondary Standby 5V  
±5%; 10mA
- Low Dropout Voltage  
(0.6V at 0.5A)
- ON/OFF Control Option
- Low Quiescent Drain  
(<3mA)
- RESET Option
- Protection Features  
Reverse Battery  
60V Load Dump  
-50V Reverse Transient  
Short Circuit  
Thermal Shutdown  
Overvoltage Shutdown

## Absolute Maximum Ratings

|                                                    |                         |
|----------------------------------------------------|-------------------------|
| Input Voltage                                      |                         |
| Operating Range .....                              | -0.5V to 26V            |
| Load Dump .....                                    | 60V                     |
| Internal Power Dissipation .....                   | Internally Limited      |
| Junction Temperature Range (T <sub>J</sub> ) ..... | -40°C to +150°C         |
| Storage Temperature Range .....                    | -65°C to +150°C         |
| Lead Temperature Soldering                         |                         |
| Wave Solder (through hole styles only) .....       | 10 sec. max, 260°C peak |
| Electrostatic Discharge (Human Body Model) .....   | 2kV                     |


## Block Diagram

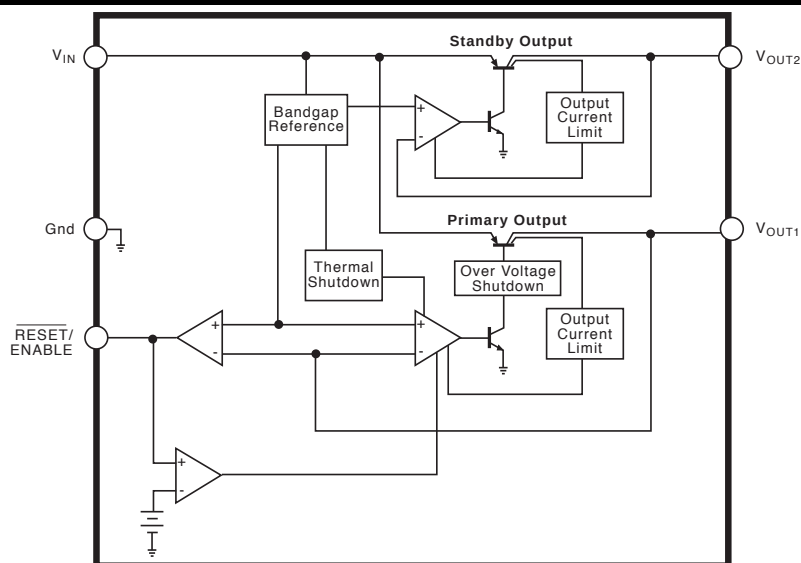

## Package Option

5 Lead TO-220

Tab (Gnd)



- 1 V<sub>IN</sub>
- 2 V<sub>OUT1</sub>
- 3 Gnd
- 4 RESET /  
ENABLE
- 5 V<sub>OUT2</sub>



**Cherry  
Semiconductor**

Cherry Semiconductor Corporation  
2000 South County Trail, East Greenwich, RI 02818  
Tel: (401)885-3600 Fax: (401)885-5786  
Email: info@cherry-semi.com  
Web Site: www.cherry-semi.com

**Electrical Characteristics :  $V_{IN} = 14V$ ,  $I_{OUT1} = 5mA$ ,  $I_{OUT2} = 1mA$ ,  $-40^{\circ}C \leq T_A \leq 125^{\circ}C$ ,  $-40^{\circ}C \leq T_J \leq 150^{\circ}C$  unless otherwise specified**

| PARAMETER                                     | TEST CONDITIONS                                                       | MIN  | TYP  | MAX  | UNIT          |
|-----------------------------------------------|-----------------------------------------------------------------------|------|------|------|---------------|
| <b>■ Output Stage (<math>V_{OUT1}</math>)</b> |                                                                       |      |      |      |               |
| Output Voltage, $V_{OUT1}$                    | $6V \leq V_{IN} \leq 26V$ , $5mA \leq I_{OUT1} \leq 500mA$            | 4.75 | 5.00 | 5.25 | V             |
| Dropout Voltage                               | $I_{OUT} = 500mA$                                                     |      | 0.35 | 0.60 | V             |
|                                               | $I_{OUT} = 750mA$                                                     |      | 0.50 |      | V             |
| Line Regulation                               | $6V \leq V_{IN} \leq 26V$ , $I_{OUT1} = 5mA$                          |      | 10   | 50   | mV            |
| Load Regulation                               | $5mA \leq I_{OUT} \leq 500mA$                                         |      | 10   | 50   | mV            |
| Quiescent Current                             | $I_{OUT1} \leq 10mA$ , No Load on Standby                             |      | 3    | 7    | mA            |
|                                               | $I_{OUT1} = 500mA$ , No Load on Standby                               |      | 30   | 100  | mA            |
|                                               | $I_{OUT1} = 750mA$ , No Load on Standby                               |      | 60   | 150  | mA            |
| Ripple Rejection                              | $f = 120Hz$                                                           |      | 66   |      | dB            |
| Current Limit                                 |                                                                       | 0.75 | 1.40 |      | A             |
| Maximum Line Transient                        | $V_{OUT1} \leq 5.5V$                                                  |      | 90   |      | V             |
| Reverse Polarity<br>Input Voltage, DC         | $V_{OUT1} \geq -0.6V$ , $10\Omega$ Load                               |      | -50  |      | V             |
| Reverse Polarity Input<br>Voltage, Transient  | 1% Duty Cycle, $t = 100ms$ , $V_{OUT1} \geq -6V$ ,<br>$10\Omega$ Load |      | -80  |      | V             |
| Output Noise Voltage                          | 10Hz-100kHz                                                           |      | 100  |      | $\mu V_{rms}$ |
| Long Term Stability                           |                                                                       |      | 20   |      | mV/khr        |
| Output Impedance                              | 500mA DC and 10mA rms,<br>100Hz-10kHz                                 |      | 200  |      | m $\Omega$    |
| Overvoltage Shutdown                          |                                                                       |      | 30   |      | V             |


|                                                 |                                                           |      |      |      |          |
|-------------------------------------------------|-----------------------------------------------------------|------|------|------|----------|
| <b>■ Standby Output (<math>V_{OUT2}</math>)</b> |                                                           |      |      |      |          |
| Output Voltage ( $V_{OUT2}$ )                   | $6V \leq V_{IN} \leq 26V$ , $1mA \leq I_{OUT1} \leq 10mA$ | 4.75 | 5.00 | 5.25 | V        |
| Dropout Voltage                                 | $I_{OUT2} = 10mA$                                         |      | 0.3  | 0.7  | V        |
| Tracking                                        | $V_{OUT1} - V_{OUT2}$                                     |      | 50   | 200  | mV       |
| Line Regulation                                 | $6V \leq V_{IN} \leq 26V$                                 |      | 4    | 50   | mV       |
| Load Regulation                                 | $1mA \leq I_{OUT1} \leq 10mA$                             |      | 10   | 50   | mV       |
| Quiescent Current                               | $I_{OUT} \leq 10mA$ , $V_{OUT}$ OFF                       |      | 2    | 3    | mA       |
| Ripple Rejection                                | $f = 120Hz$                                               |      | 66   |      | dB       |
| Current Limit                                   |                                                           | 25   | 70   |      | mA       |
| Output Noise Voltage                            | 10Hz-100kHz                                               |      | 300  |      | $\mu V$  |
| Long Term Stability                             |                                                           |      | 20   |      | mV/khr   |
| Output Impedance                                | 10mA DC and 1mA rms, 100Hz-10kHz                          |      | 1    |      | $\Omega$ |

|                                         |                                            |     |     |     |            |
|-----------------------------------------|--------------------------------------------|-----|-----|-----|------------|
| <b>■ RESET Function</b>                 |                                            |     |     |     |            |
| RESET Output Voltage                    |                                            |     |     |     |            |
| Low $R_1 = 20k\Omega$ , $V_{IN} = 4.5V$ | See Test & Application Circuit<br>(page 6) |     | 0.8 | 1.1 | V          |
| High $R_1 = 20k\Omega$ , $V_{IN} = 14V$ |                                            | 4.5 | 5.0 | 6.0 | V          |
| RESET Output Current                    | $V_{IN} = 4.5V$ , RESET in Low State       |     | 5   |     | mA         |
| ON/OFF Resistor                         | $R_1$ ( $\pm 10\%$ Tolerance)              |     | 20  | 30  | k $\Omega$ |


## Package Lead Description

| PACKAGE LEAD # | LEAD SYMBOL               | FUNCTION                                                                                                                                                                                  |
|----------------|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>TO-220</b>  |                           |                                                                                                                                                                                           |
| 1              | $V_{IN}$                  | Supply voltage to IC, usually direct from battery.                                                                                                                                        |
| 2              | $V_{OUT1}$                | Regulated output voltage 5V, 500mA (typ) switched.                                                                                                                                        |
| 3              | Gnd                       | Ground connection.                                                                                                                                                                        |
| 4              | $\overline{RESET}/ENABLE$ | CMOS compatible output lead, $\overline{RESET}$ goes low whenever $V_{OUT1}$ becomes unregulated. To use the ENABLE option, connect the lead via a resistor to $V_{IN}$ (see app. notes). |
| 5              | $V_{OUT2}$                | STANDBY output 5V, 10mA typ, always on.                                                                                                                                                   |


## Typical Performance Characteristics

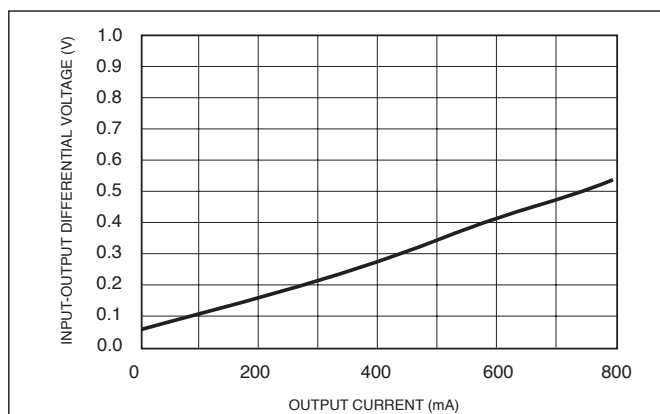



Dropout Voltage vs. Output Current

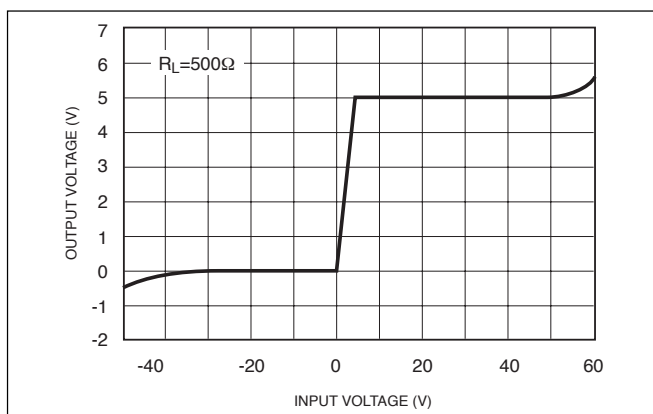


Standby Output Voltage vs. Input Voltage

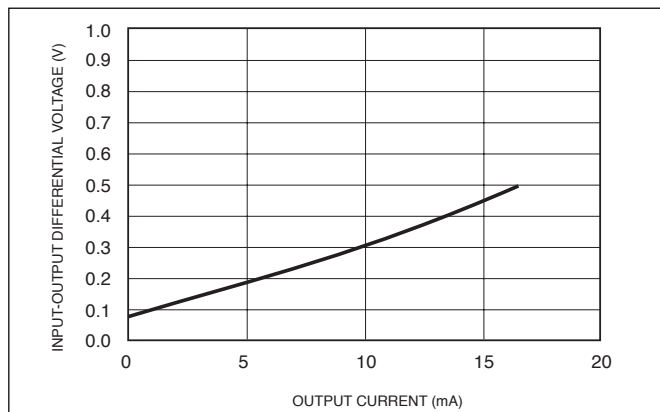



Standby Dropout Voltage vs. Output Current

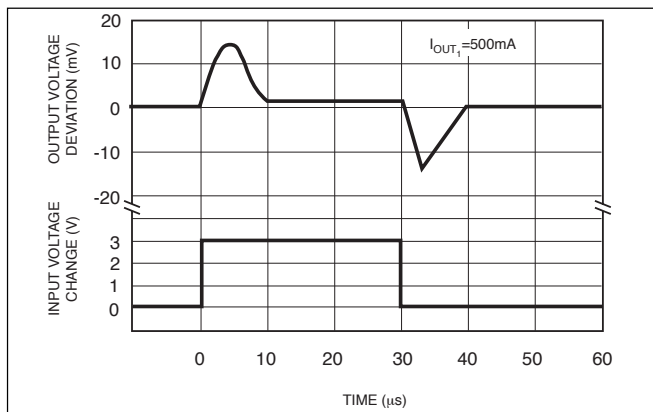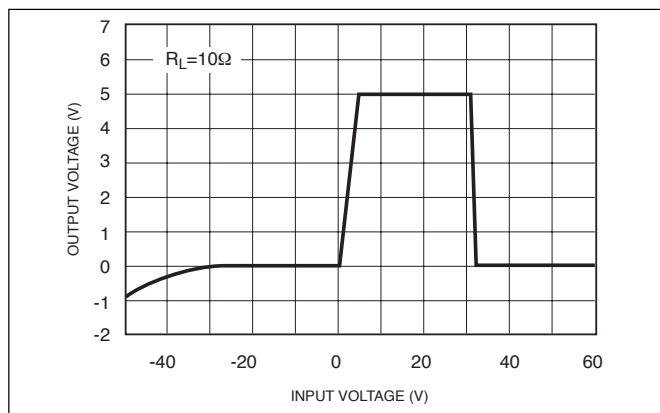Line Transient Response ( $V_{OUT1}$ )



Output Voltage vs. Input Voltage

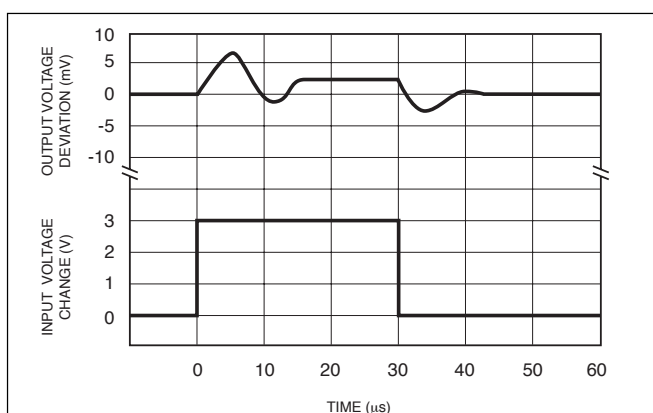Line Transient Response ( $V_{OUT2}$ )


## Typical Performance Characteristics: continued

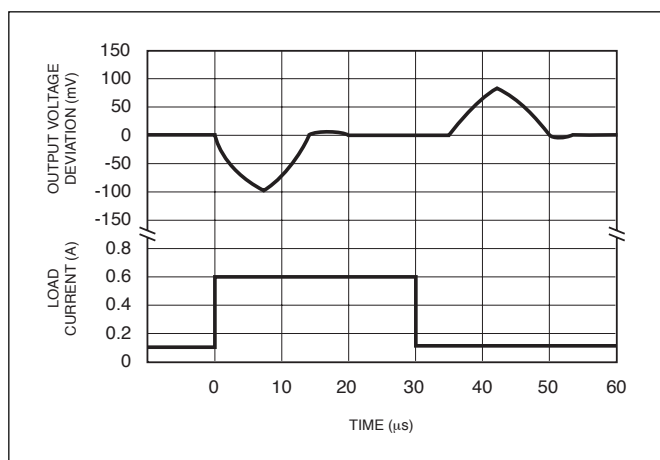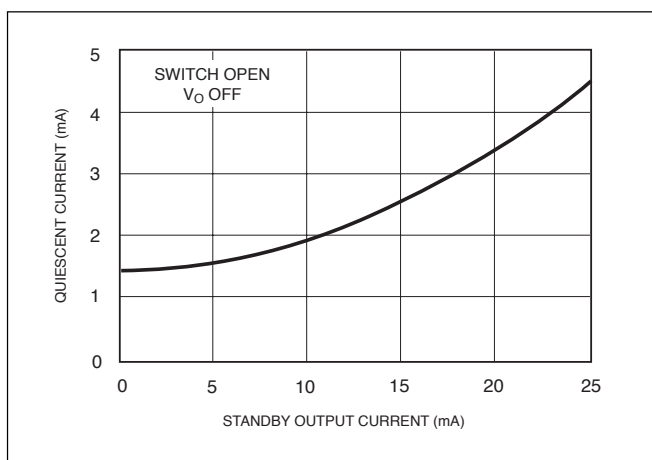Load Transient Response ( $V_{OUT1}$ )

Quiescent Current vs. Standby Output Current

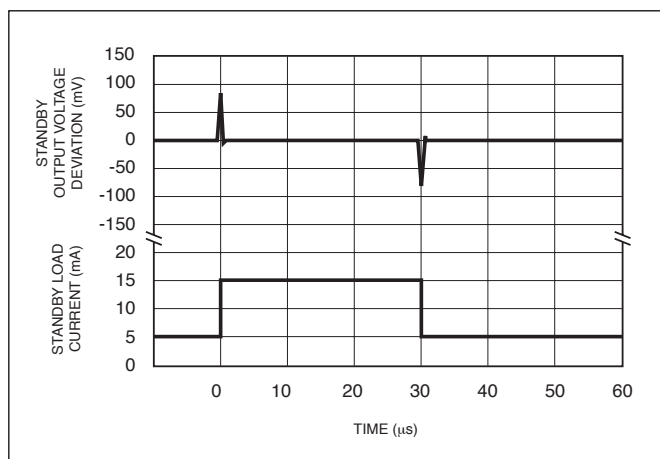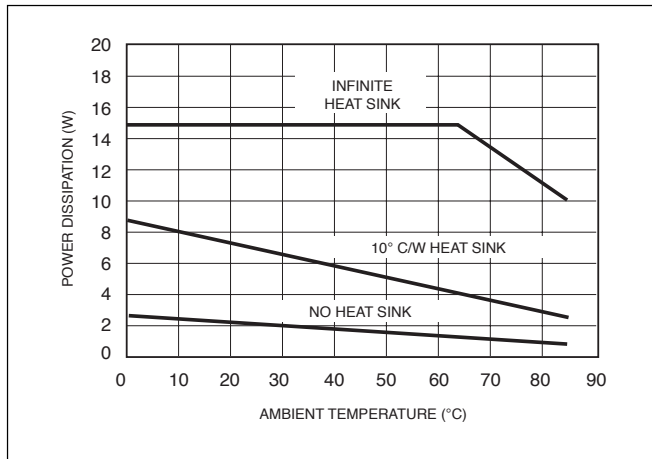Load Transient Response ( $V_{OUT2}$ )

Maximum Power Dissipation (TO-220)

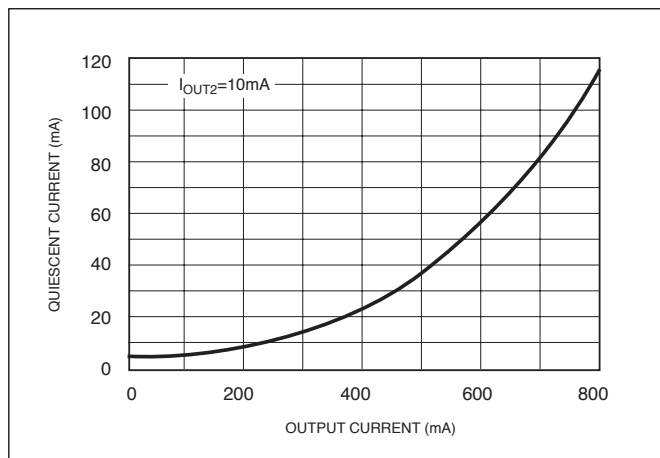

Quiescent Current vs. Output Current

## Definition of Terms

### Dropout Voltage

The input-output voltage differential at which the circuit ceases to regulate against further reduction in input voltage. Measured when the output voltage has dropped 100mV from the nominal value obtained at 14V input, dropout voltage is dependent upon load current and junction temperature.

### Input Voltage

The DC voltage applied to the input with respect to ground.

### Input Output Differential

The voltage difference between the unregulated input voltage and the regulated output voltage for which the regulator will operate.

### Line Regulation

The change in output voltage for a change in the input voltage. The measurement is made under conditions of low dissipation or by using pulse techniques such that the average chip temperature is not significantly affected.

### Load Regulation

The change in output voltage for a change in load current at constant chip temperature.

### Long Term Stability

Output voltage stability under accelerated life-test conditions after 1000 hours with maximum rated voltage and junction temperature.

### Output Noise Voltage

The rms AC voltage at the output, with constant load and no input ripple, measured over a specified frequency range.

### Quiescent Current

The part of the positive input current that does not contribute to the positive load current. i.e., the regulator ground lead current.

### Ripple Rejection

The ratio of the peak-to-peak input ripple voltage to the peak-to-peak output ripple voltage.


### Temperature Stability of V<sub>OUT</sub>

The percentage change in output voltage for a thermal variation from room temperature to either temperature extreme.

### Current Limit

Peak current that can be delivered to the output.

## Typical Circuit Waveform

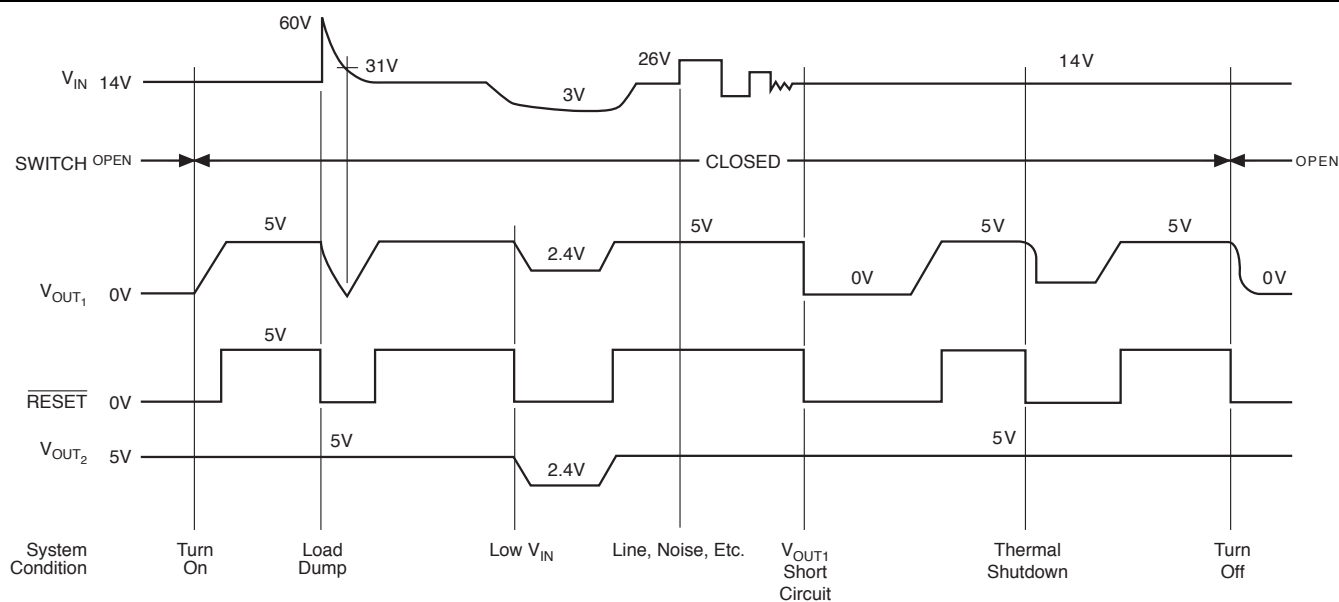

\*Reference Test & Application Circuit


## Circuit Description

### Standby Output

The CS8135 is equipped with two outputs. The second output is intended for use in systems requiring standby memory circuits. While the high current regulator output can be controlled with the **RESET** lead described below, the standby output remains on under all conditions as long as sufficient input voltage is applied to the IC. Thus, memory and other circuits powered by this output remain unaffected by positive line transients, thermal shutdown, etc.

The standby regulator circuit is designed so that the quiescent current to the IC is very low (<3mA) when the other regulator output is off.

In applications where the standby output is not needed, it may be disabled by connecting a resistor from the standby output to the supply voltage. This eliminates the need for a capacitor on the output to prevent unwanted oscillations. The value of the resistor depends upon the minimum input voltage expected for a given system. Since the standby output is shunted with an internal diode zener, the current through the external resistor should be sufficient to bias V<sub>OUT2</sub> up to this point. Approximately 60μA will suffice, resulting in a 10kΩ external resistor for most applications.

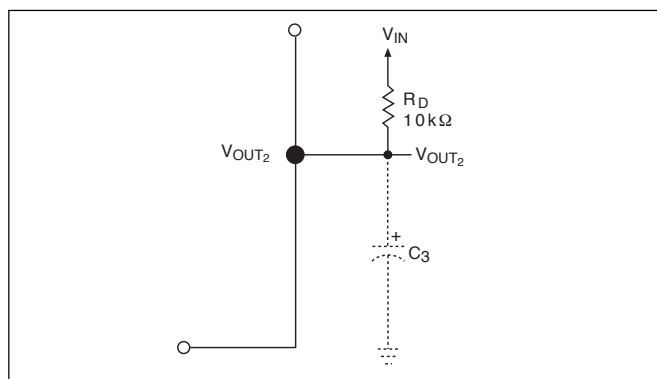

Disabling  $V_{OUT2}$  when it is not needed.  $C3$  is no longer needed.

### High Current Output


Unlike the standby regulated output, which must remain on whenever possible, the high current regulated output is fault protected against overvoltage and also incorporates thermal shutdown. If the input voltage rises above approximately 30V (e.g., load dump), this output will automatically shutdown. This protects the internal circuitry and enables the IC to survive higher voltage transients than would otherwise be expected. Thermal shutdown is effective against die overheating since the high current output is the dominant source of power dissipation in the IC.

### RESET Function


The  $\overline{\text{RESET}}$  function has the ability to serve a dual purpose if desired. When controlled in the manner shown in the test circuit (common in automotive systems where  $\overline{\text{RESET}}$  / ENABLE is connected to the ignition switch), the lead also serves as an output flag that is active low whenever a fault condition is detected with the high current regulated output. Under normal operating conditions, the

output voltage of this lead is high (5V). This is set by an internal clamp. If the high current output becomes unregulated for any reason (line transients, short circuit, thermal shutdown, low input voltage, etc.) the lead switches to the active low state, and is capable of sinking several milliamps. This output signal can be used to initiate any reset or start-up procedure that may be required of the system.

The  $\overline{\text{RESET}}$  lead can also be driven directly from logic circuits. The only requirement is that the 20kΩ pull-up resistor remain in place. This will not affect the logic gate since the voltage on this lead is limited by the internal clamp to 5V. The  $\overline{\text{RESET}}$  signal is sacrificed in this arrangement since the maximum sink capability of the lead in the active low state (approximately 5mA), is usually not sufficient to pull down the active high logic gate. The flag can be retained if the driving gate is open collector logic.

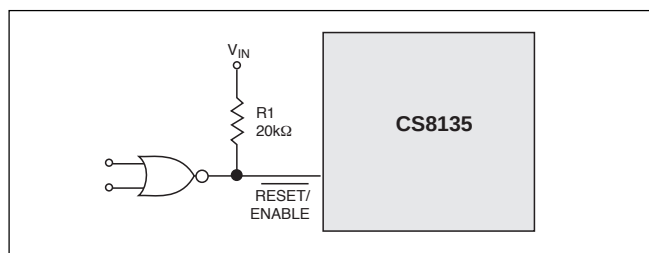


Controlling ON/OFF Terminal with a typical CMOS or TTL Logic Gate

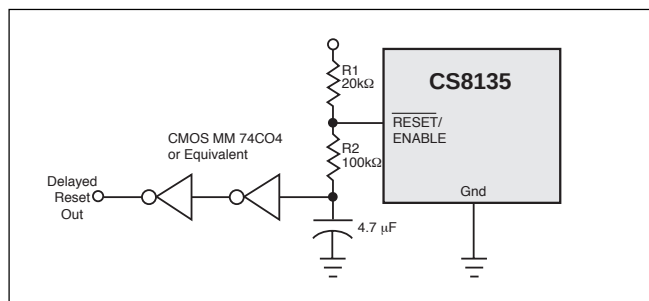

Reset Pulse on Power-Up (with approximately 300ms delay)

## Application Notes

### Test & Application Circuit

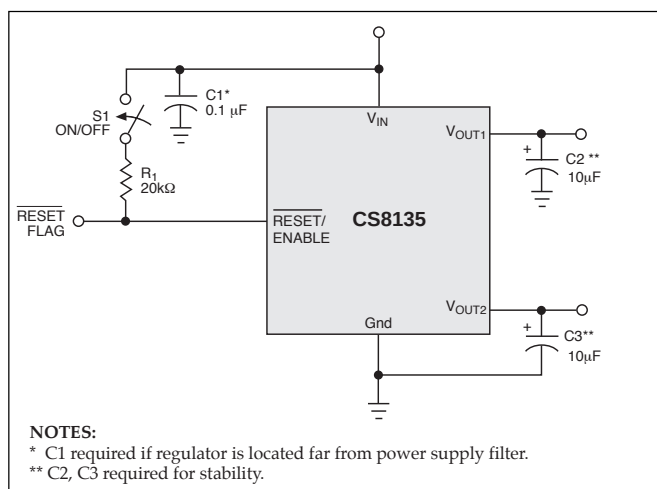

### Stability Considerations

The output or compensation capacitor helps determine three main characteristics of a linear regulator: start-up delay, load transient response and loop stability.

The capacitor value and type should be based on cost, availability, size and temperature constraints. A tantalum or aluminum electrolytic capacitor is best, since a film or ceramic capacitor with almost zero ESR, can cause instability. The aluminum electrolytic capacitor is the least expensive solution, but, if the circuit operates at low temperatures ( $-25^{\circ}\text{C}$  to  $-40^{\circ}\text{C}$ ), both the value and ESR of the capacitor will vary considerably. The capacitor manufacturers data sheet usually provides this information.

The value for output capacitor  $C2$  shown in the test and applications circuit should work for most applications, however it is not necessarily the optimized solution.

To determine acceptable values for  $C2$  and  $C3$  for a particular application, start with a tantalum capacitor of the rec-

ommended value and work towards a less expensive alternative part for each output.

**Step 1:** Place the completed circuit with the tantalum capacitors of the recommended values in an environmental chamber at the lowest specified operating temperature and monitor the outputs with an oscilloscope. A decade box connected in series with capacitor  $C_2$  will simulate the higher ESR of an aluminum capacitor. Leave the decade box outside the chamber, the small resistance added by the longer leads is negligible.

**Step 2:** With the input voltage at its maximum value, increase the load current slowly from zero to full load on the output under observation and look for oscillations on the output. If no oscillations are observed, the capacitor is large enough to ensure a stable design under steady state conditions.

**Step 3:** Increase the ESR of the capacitor from zero using the decade box and vary the load current until oscillations appear. Record the values of load current and ESR that cause the greatest oscillation. This represents the worst case load conditions for the output at low temperature.

**Step 4:** Maintain the worst case load conditions set in step 3 and vary the input voltage until the oscillations increase. This point represents the worst case input voltage conditions.

**Step 5:** If the capacitor is adequate, repeat steps 3 and 4 with the next smaller valued capacitor. A smaller capacitor will usually cost less and occupy less board space. If the output oscillates within the range of expected operating conditions, repeat steps 3 and 4 with the next larger standard capacitor value.

**Step 6:** Test the load transient response by switching in various loads at several frequencies to simulate its real working environment. Vary the ESR to reduce ringing.

**Step 7:** Remove the unit from the environmental chamber and heat the IC with a heat gun. Vary the load current as instructed in step 5 to test for any oscillations.

Once the minimum capacitor value with the maximum ESR is found, a safety factor should be added to allow for the tolerance of the capacitor and any variations in regulator performance. Most good quality aluminum electrolytic capacitors have a tolerance of  $\pm 20\%$  so the minimum value found should be increased by at least 50% to allow for this tolerance plus the variation which will occur at low temperatures. The ESR of the capacitor should be less than 50% of the maximum allowable ESR found in step 3 above.

Repeat steps 1 through 7 with the capacitor on the other output,  $C_3$ .

#### Calculating Power Dissipation in a Dual Output Linear Regulator

The maximum power dissipation for a dual output regulator (Figure 1) is:

$$P_{D(max)} = \{V_{IN(max)} - V_{OUT1(min)}\}I_{OUT1(max)} + \{V_{IN(max)} - V_{OUT2(min)}\}I_{OUT2(max)} + V_{IN(max)}I_Q \quad (1)$$

Where

$V_{IN(max)}$  is the maximum input voltage,

$V_{OUT1(min)}$  is the minimum output voltage from  $V_{OUT1}$ ,

$V_{OUT2(min)}$  is the minimum output voltage from  $V_{OUT2}$ ,

$I_{OUT1(max)}$  is the maximum output current for the application,

$I_{OUT2(max)}$  is the maximum output current, for the application, and

$I_Q$  is the quiescent current the regulator consumes at  $I_{OUT(max)}$ .

Once the value of  $P_{D(max)}$  is known, the maximum permissible value of  $R_{\theta JA}$  can be calculated:

$$R_{\theta JA} = \frac{150^\circ\text{C} - T_A}{P_D} \quad (2)$$

The value of  $R_{\theta JA}$  can then be compared with those in the package section of the data sheet. Those packages with  $R_{\theta JA}$ 's less than the calculated value in equation 2 will keep the die temperature below  $150^\circ\text{C}$ .

In some cases, none of the packages will be sufficient to dissipate the heat generated by the IC, and an external heatsink will be required.

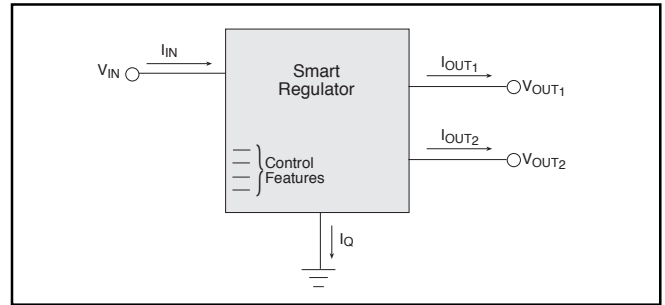


Figure 1: Dual output regulator with key performance parameters labeled.

#### Heat Sinks

A heat sink effectively increases the surface area of the package to improve the flow of heat away from the IC and into the surrounding air.

Each material in the heat flow path between the IC and the outside environment will have a thermal resistance. Like series electrical resistances, these resistances are summed to determine the value of  $R_{\theta JA}$ .

$$R_{\theta JA} = R_{\theta JC} + R_{\theta CS} + R_{\theta SA} \quad (3)$$

where

$R_{\theta JC}$  = the junction-to-case thermal resistance,


$R_{\theta CS}$  = the case-to-heatsink thermal resistance, and

$R_{\theta SA}$  = the heatsink-to-ambient thermal resistance.

$R_{\theta JC}$  appears in the package section of the data sheet. Like  $R_{\theta JA}$ , it too is a function of package type.  $R_{\theta CS}$  and  $R_{\theta SA}$  are functions of the package type, heatsink and the interface between them. These values appear in heat sink data sheets of heat sink manufacturers.

## PACKAGE THERMAL DATA

|              |               |
|--------------|---------------|
| Thermal Data | 5 Lead TO-220 |
|--------------|---------------|



**5 Lead TO-220 (THA) Horizontal**

**Front View Dimensions:**

- Top width: 10.54 (.415)
- Inner top width: 9.78 (.385)
- Lead spacing (top): 2.87 (.113)
- Lead spacing (bottom): 2.62 (.103)
- Body height: 6.55 (.258)
- Lead height: 5.94 (.234)
- Lead width: 0.81 (.032)
- Lead pitch: 6.81 (.268)
- Lead length: 1.70 (.067)
- Lead thickness: 1.68 (.066) TYP

**Side View Dimensions:**

- Lead thickness: 0.36 (.014)
- Lead width: 0.56 (.022)
- Lead height: 2.77 (.109)
- Lead pitch: 6.83 (.269)
- Lead length: 1.40 (.055)
- Lead width: 1.14 (.045)
- Lead height: 14.99 (.590)
- Lead length: 14.22 (.560)
- Lead width: 4.83 (.190)
- Lead width: 4.06 (.160)
- Lead width: 2.92 (.115)
- Lead width: 2.29 (.090)
- Lead width: 6.60 (.260)
- Lead width: 5.84 (.230)

**Lead Detail View:**

- Lead width: 0.81 (.032)
- Lead pitch: 6.81 (.268)

Technical drawing of a mechanical part showing three views: front, side, and top. Dimensions are provided in inches and millimeters.

**Front View Dimensions:**

- Overall width: 10.54 (.415)
- Distance from left edge to center of hole: 9.78 (.385)
- Distance from top edge to center of hole: 3.96 (.156)
- Distance from center of hole to right edge: 3.71 (.146)
- Overall height: 6.55 (.258)
- Distance from bottom edge to top of block: 5.94 (.234)
- Distance from bottom edge to top of first slot: 8.64 (.340)
- Distance from bottom edge to top of last slot: 7.87 (.310)
- Distance from left edge to first slot: 1.70 (.067)
- Distance between slots: 1.68 (.066) typ
- Distance from last slot to right edge: 6.80 (.268)

**Side View Dimensions:**

- Overall width: 4.83 (.190)
- Distance from left edge to right edge: 4.06 (.160)
- Distance from top edge to bottom of block: 14.99 (.590)
- Distance from bottom of block to bottom of flange: 14.22 (.560)
- Distance from bottom of flange to bottom of part: 1.78 (.070)
- Distance from left edge to right edge of flange: 2.92 (.115)
- Distance from bottom of flange to bottom of part: 2.29 (.090)
- Distance from left edge to right edge of part: 4.34 (.171)
- Distance from left edge to right edge of part: 7.51 (.296)

**Top View Dimensions:**

- Distance from left edge to first slot: .94 (.037)
- Distance from first slot to second slot: .69 (.027)
- Distance from second slot to third slot: .56 (.022)
- Distance from third slot to right edge: 0.36 (.014)

| Part Number | Description              |
|-------------|--------------------------|
| CS8135YT5   | 5 Lead TO-220 Straight   |
| CS8135YTVA5 | 5 Lead TO-220 Vertical   |
| CS8135YTHA5 | 5 Lead TO-220 Horizontal |

Cherry Semiconductor Corporation reserves the right to make changes to the specifications without notice. Please contact Cherry Semiconductor Corporation for the latest available information.





## О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

**Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.**

### Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (XC), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

## Перечень производителей, продукцию которых мы поставляем на российский рынок





Trade Electronics.ru

гарантия бесперебойности производства и  
качества выпускаемой продукции

С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

<http://www.tradeelectronics.ru/>