



I/O SSRs That Mount to OMRON's G7TC I/O Block

- Input and output modules are available in wide variety.
- Snaps easily into P7TF I/O Terminals and can be used together with G7T I/O relays.
- Operation of each SSR can be monitored easily through an LED indicator.
- Certified by UL and CSA.

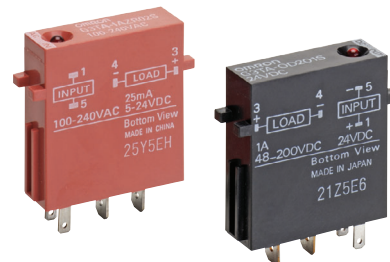

 Refer to *Safety Precautions for All Solid State Relays*.

Model Number Structure

Model Number Legend

G3TA□□□□□□□□-□
 1 2 3 4 5 6 7 8 9 10

1. Basic Model Name

G3T: I/O Solid State Relay

2. Structure

A: Socket type for PCB

3. I/O

I: Input models

O: Output models

4. Type

A: Input models: AC input
 Output models: AC output

D: Input models: DC input
 Output models: DC output

5. Rated Load Power Supply Voltage

2: 200 VAC/200 VDC

X: 50 to 100 V

Z: 26 V max.

6. Rated Load Current

01: 1 A

02: 2 A

R02: 25 mA

7. Terminal Type

S: Plug-in terminals

8. Zero Cross Function

Blank: DC output models

Z: Equipped with zero cross function

L: Not equipped with zero cross function

9. Operation Indicator

Blank: Equipped with operation indicator

M: Not equipped with operation indicator

10. Certification

US: Certified by UL and CSA

Ordering Information

List of Models

Input Modules

| Isolation | Indicator | Logic level | | Rated input voltage | Model |
|--------------|-----------|----------------|----------------|---------------------|-----------------|
| | | Supply voltage | Supply current | | |
| Photocoupler | Yes | 4 to 32 VDC | 25 mA | 100 to 240 VAC | G3TA-IAZR02S-US |
| | | | | 5 to 24 VDC | G3TA-IDZR02S-US |
| | No | | 4 to 24 VDC | G3TA-IDZR02SM-US | |

Note: When ordering, specify the rated input voltage.

Output Modules

| Isolation | Zero cross function | Indicator | Rated output load | Rated input voltage | Model |
|--------------|---------------------|-----------|-------------------------------|---------------------|-----------------|
| Phototriac | Yes | Yes | 2 A at 100 to 240 VAC at 60°C | 12 VDC | G3TA-OA202SZ-US |
| | | | | 24 VDC | |
| | No | | | 12 VDC | G3TA-OA202SL-US |
| | | | | 24 VDC | |
| Photocoupler | --- | | 2 A at 5 to 48 VDC at 60°C | 12 VDC | G3TA-ODX02S-US |
| | | | | 24 VDC | |
| | | | 1 A at 48 to 200 VDC at 40°C | 12 VDC | G3TA-OD201S-US |
| | | | | 24 VDC | |

Note: 1. For information on products that are certified for international standards, consult your OMRON sales representatives.
2. Input Modules are mainly suitable for signal input to PLCs. For load switching, consider using an Output Module.

I/O Indication

The modules are classified as Input Modules and Output Modules according to the main application of the Module.
I/O module classification and AC/DC use are indicated on the mark affixed to the top of the product.

Mark attached to the top of product



| Mark indication | Specification |
|-----------------|--------------------------|
| AC IN | Input module, AC input |
| DC IN | Input module, DC input |
| AC OUT | Output module, AC output |
| DC OUT | Output module, DC output |

■ Accessories (Order Separately)

Connecting Socket

| I/O classification | Rated voltage | Model |
|------------------------|---------------|-------------|
| Input (NPN, – common) | 12 VDC | P7TF-IS16 |
| | 24 VDC | |
| | 100/110 VDC | |
| | 100/110 VAC | |
| | 200/220 VAC | |
| Output (NPN, + common) | 12 VDC | P7TF-OS16 |
| | 24 VDC | |
| Output (PNP, – common) | 12 VDC | P7TF-OS16-1 |
| | 24 VDC | |
| Output (NPN, + common) | 12 VDC | P7TF-OS08 |
| | 24 VDC | |
| --- | --- | P7TF-05 |

Specifications

■ Ratings (at an Ambient Temperature of 25°C)

Input Module

Input

| Model | Rated voltage | Operating voltage | Input current | Voltage level | |
|------------------|----------------|-------------------|---------------|----------------------|----------------------|
| | | | | Must operate voltage | Must release voltage |
| G3TA-IAZR02S-US | 100 to 240 VAC | 80 to 264 VAC | 5 mA max. | 80 VAC max. | 10 VAC min. |
| G3TA-IDZR02S-US | 5 to 24 VDC | 4 to 32 VDC | | 4 VDC max. | 1 VDC min. |
| G3TA-IDZR02SM-US | 4 to 24 VDC | 3 to 32 VDC | | 3 VDC max. | |

Output

| Model | Logic level supply voltage | Output breakdown voltage | Output current | Output current (load current) |
|------------------|----------------------------|--------------------------|----------------|-------------------------------|
| G3TA-IAZR02S-US | 4 to 32 VDC | 32 VDC max. | 25 mA max. | 0.1 to 25 mA |
| G3TA-IDZR02S-US | | | | |
| G3TA-IDZR02SM-US | | | | |

Output Module

Input

| Model | Rated voltage | Operating voltage | Input impedance | Voltage level | |
|-----------------|---------------|-------------------|-----------------|----------------------|----------------------|
| | | | | Must operate voltage | Must release voltage |
| G3TA-OA202SZ-US | 12 VDC | 9.6 to 13.2 VDC | 0.9 kΩ±20% | 9.6 VDC max. | 2 VDC min. |
| | 24 VDC | 19.2 to 26.4 VDC | 1.7 kΩ±20% | 19.2 VDC max. | |
| G3TA-OA202SL-US | 12 VDC | 9.6 to 13.2 VDC | 0.9 kΩ±20% | 9.6 VDC max. | |
| | 24 VDC | 19.2 to 26.4 VDC | 1.7 kΩ±20% | 19.2 VDC max. | |
| G3TA-ODX02S-US | 12 VDC | 9.6 to 13.2 VDC | 3.5 kΩ±20% | 9.6 VDC max. | |
| | 24 VDC | 19.2 to 26.4 VDC | 6.5 kΩ±20% | 19.2 VDC max. | |
| G3TA-OD201S-US | 12 VDC | 9.6 to 13.2 VDC | 3.6 kΩ±20% | 9.6 VDC max. | |
| | 24 VDC | 19.2 to 26.4 VDC | 6.4 kΩ±20% | 19.2 VDC max. | |

Output

| Model | Applicable load | | | |
|-----------------|--------------------|--------------------|--------------------------|-----------------------|
| | Rated load voltage | Load voltage range | Load current (See note.) | Inrush current |
| G3TA-OA202SZ-US | 100 to 240 VAC | 75 to 264 VAC | 0.05 to 2 A | 30 A (60 Hz, 1 cycle) |
| G3TA-OA202SL-US | 100 to 240 VAC | 75 to 264 VAC | | |
| G3TA-ODX02S-US | 5 to 48 VDC | 4 to 60 VDC | 0.01 to 2 A | 12 A (10 ms) |
| G3TA-OD201S-US | 48 to 200 VDC | 40 to 200 VDC | 0.01 to 1 A | 6 A (10 ms) |

Note: The minimum current value is measured at 10°C min.

■ Characteristics


Input Module

| Item | G3TA-IAZR02S-US | G3TA-IDZR02S-US | G3TA-IDZR02SM-US |
|------------------------|---|-----------------|------------------|
| Operate time | 20 ms max. | 0.5 ms max. | |
| Release time | 20 ms max. | 0.5 ms max. | |
| Output ON voltage drop | 1.6 V max. | 1.6 V max. | |
| Leakage current | 5 μ A max. | | |
| Insulation resistance | 100 M Ω min. (at 500 VDC) | | |
| Dielectric strength | 4,000 VAC, 50/60 Hz for 1 min between input and output | | |
| Vibration resistance | Malfunction: 10 to 55 to 10 Hz, 0.75-mm single amplitude | | |
| Shock resistance | Malfunction: 1,000 m/s ² | | |
| Ambient temperature | Operating: -30°C to 80°C (with no icing or condensation) Storage: -30°C to 100°C (with no icing or condensation) | | |
| Ambient humidity | Operating: 45% to 85% | | |
| Certified standards | UL508 file No. E64562/CSA C22.2 (No. 0, No. 14) file No. LR35535 | | |
| Weight | Approx. 16 g | | |


Output Module

| Item | G3TA-OA202SZ-US | G3TA-OA202SL-US | G3TA-ODX02S-US | G3TA-OD201S-US |
|------------------------|---|-----------------|----------------|----------------|
| Operate time | 1/2 of load power source cycle + 1 ms max. | 1 ms max. | 0.5 ms max. | 2 ms max. |
| Release time | 1/2 of load power source cycle + 1 ms max. | | 2 ms max. | 2 ms max. |
| Output ON voltage drop | 1.6 V rms max. | | 1.6 V max. | 2.5 V max. |
| Leakage current | 5 mA max. (at 200 VAC) | | 1 mA max. | |
| Insulation resistance | 100 M Ω min. (at 500 VDC) | | | |
| Dielectric strength | 4,000 VAC, 50/60 Hz for 1 min between input and output | | | |
| Vibration resistance | Malfunction: 10 to 55 to 10 Hz, 0.75-mm single amplitude | | | |
| Shock resistance | Malfunction: 1,000 m/s ² | | | |
| Ambient temperature | Operating: -30°C to 80°C (with no icing or condensation) Storage: -30°C to 100°C (with no icing or condensation) | | | |
| Ambient humidity | Operating: 45% to 85% | | | |
| Certified standards | UL508 file No. E64562, CSA C22.2 (No. 14) file No. LR3553 | | | |
| Weight | Approx. 23 g | | | |

With up to four G3TA SSRs mounted before G7T Relays, switching is possible at the rated load current for each Relay.




With G3TA SSRs mounted before every other G7T Relays, switching is possible at the rated load current for each Relay.




Engineering Data

Load Current vs. Ambient Temperature Characteristics

G3TA-OA202SZ/OA202SL/ODX02S-US

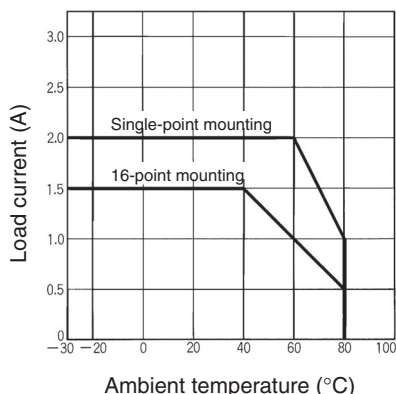


G3TA-OD201S-US

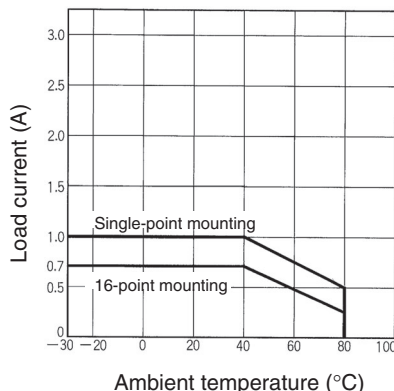


One Cycle Surge Current: Non-repetitive

Non-repetitive (Keep the inrush current to half the rated value if it occurs repetitively.)


G3TA-OA202SZ/OA202SL-US

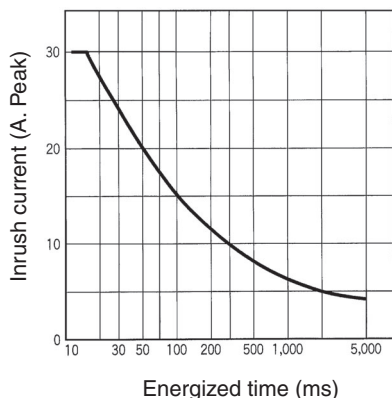

G3TA-ODX02S-US

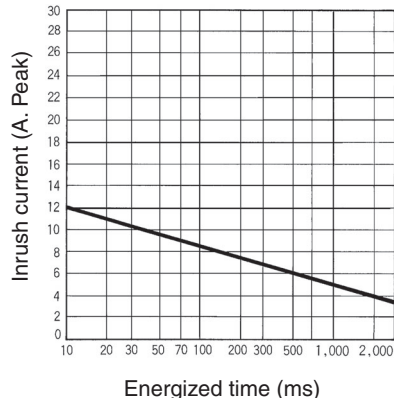


G3TA-OD201S-US

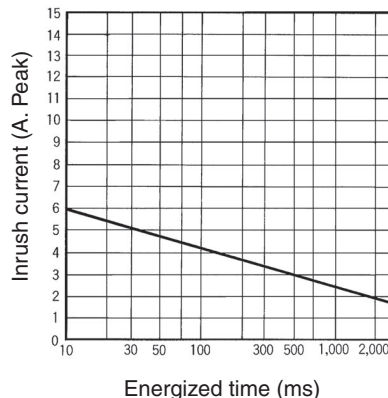


Connections

External Connections (Bottom View)


G3TA-IAZR02S




G3TA-IDZR02S/IDZR02SM



G3TA-OA



G3TA-OD




Circuit Configurations

| | Model | Case color | Operation indicator | Circuit |
|-----------|---|------------|---------------------|---------|
| AC output | G3TA-OA202SZ (with zero cross) G3TA-OA202SL (without zero cross) | Black | yes | |
| DC output | G3TA-ODX02S G3TA-OD201S | Black | yes | |
| AC input | G3TA-IAZR02S | Red | yes | |
| DC input | G3TA-IDZR02S | Green | yes | |
| | G3TA-IDZR02SM | | No | |



Dimensions

Note: All units are in millimeters unless otherwise indicated.



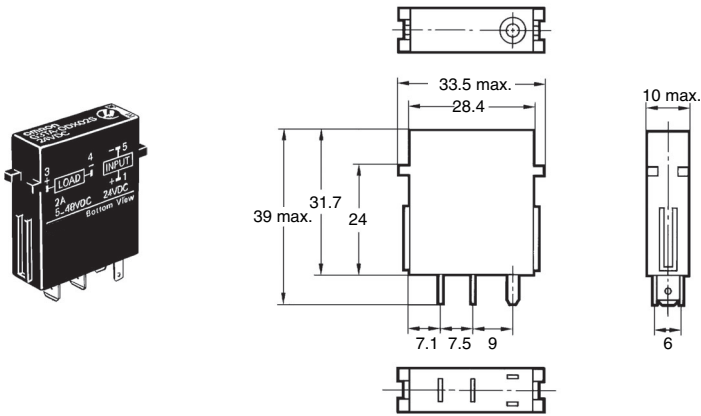


Connecting Sockets




For Input (NPN, - Common)
P7TF-IS16

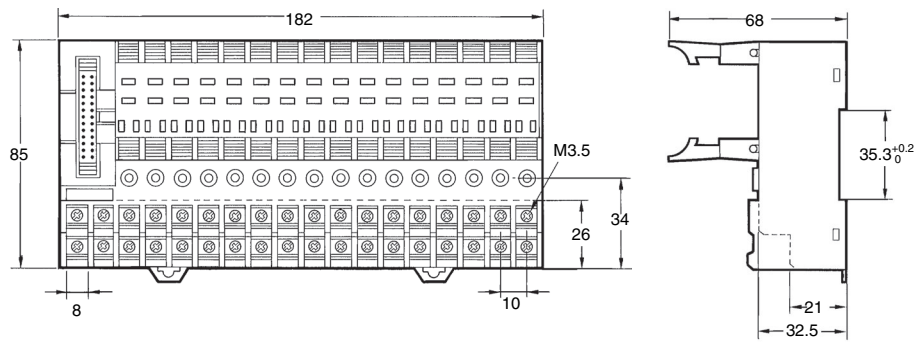



**For Output (NPN, + Common)
P7TF-OS16**

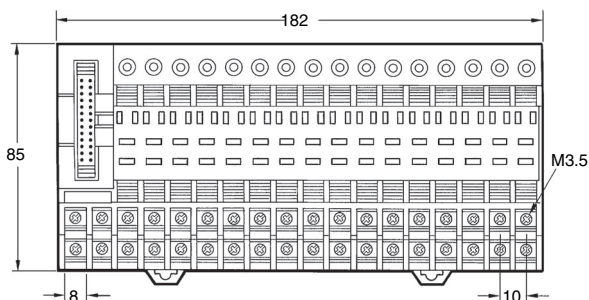

**For Output (PNP, + Common)
P7TF-OS08**

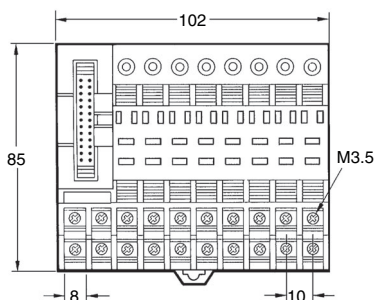

P7TF-O5

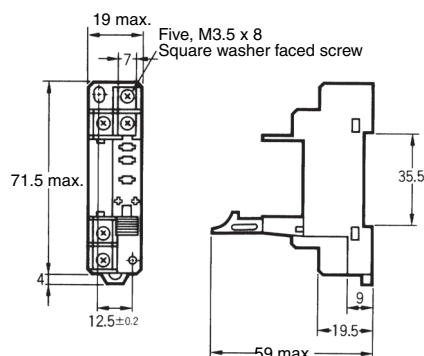

Safety Precautions

Refer to *Safety Precautions for All Solid State Relays*.

■ Precautions for Correct Use

Please observe the following precautions to prevent failure to operate, malfunction, or undesirable effect on product performance.

Connection

With the SSR for DC switching, the load can be connected to either positive or negative output terminal of the SSR.

Protective Component

Since the SSR does not incorporate an overvoltage absorption component, be sure to connect an overvoltage absorption component when using the SSR under an inductive load.

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.
To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

In the interest of product improvement, specifications are subject to change without notice.

Read and Understand This Catalog

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

Warranty and Limitations of Liability

WARRANTY

OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT THE BUYER OR USER ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

LIMITATIONS OF LIABILITY

OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT LIABILITY.

In no event shall the responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR, OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED, AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION, ABUSE, MISUSE, OR INAPPROPRIATE MODIFICATION OR REPAIR.

Application Considerations

SUITABILITY FOR USE

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of products in the customer's application or use of the products.

At the customer's request, OMRON will provide applicable third party certification documents identifying ratings and limitations of use that apply to the products. This information by itself is not sufficient for a complete determination of the suitability of the products in combination with the end product, machine, system, or other application or use.

The following are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list of all possible uses of the products, nor is it intended to imply that the uses listed may be suitable for the products:

- Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this catalog.
- Nuclear energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
- Systems, machines, and equipment that could present a risk to life or property.

Please know and observe all prohibitions of use applicable to the products.

NEVER USE THE PRODUCTS FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCTS ARE PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

PROGRAMMABLE PRODUCTS

OMRON shall not be responsible for the user's programming of a programmable product, or any consequence thereof.

Disclaimers

CHANGE IN SPECIFICATIONS

Product specifications and accessories may be changed at any time based on improvements and other reasons.

It is our practice to change model numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the products may be changed without any notice. When in doubt, special model numbers may be assigned to fix or establish key specifications for your application on your request. Please consult with your OMRON representative at any time to confirm actual specifications of purchased products.

DIMENSIONS AND WEIGHTS

Dimensions and weights are nominal and are not to be used for manufacturing purposes, even when tolerances are shown.

PERFORMANCE DATA

Performance data given in this catalog is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of OMRON's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to the OMRON Warranty and Limitations of Liability.

ERRORS AND OMISSIONS

The information in this document has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical, or proofreading errors, or omissions.

2008.11

In the interest of product improvement, specifications are subject to change without notice.

OMRON Corporation
Industrial Automation Company

<http://www.ia.omron.com/>

(c)Copyright OMRON Corporation 2008 All Right Reserved.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Omron:

[G3TA-ODX02S DC24](#)

О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.

Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (XC), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

Перечень производителей, продукцию которых мы поставляем на российский рынок



С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

<http://www.tradeelectronics.ru/>