

RTA Series

1–4 Poles Coded Rotary Switches



Features/Benefits

- PCB or hand soldering versions
- Bushing mounting
- Multiple poles
- Decimal and hexadecimal codes
- Screwdriver slot or extended actuator
- RoHS Compliant

Typical Applications

- Appliances
- Electronic alarm systems
- Medical
- Building automation
- HVAC air conditioning

Electrical Data

SWITCHING MODE:

MAX. SWITCHING POWER

MAX. SWITCHING CURRENT:

MAX. CARRYING CURRENT:

NOMINAL VOLTAGE AT 50 Hz

CONTACT RESISTANCE:

DIELECTRIC STRENGTH AT 50 Hz

BETWEEN CONTACTS AND

GROUND TERMINALS:

INSULATION RESISTANCE BETWEEN

CONTACTS OR CONTACTS

AND FRAME (500 V ⇒):

NO. OF OPERATIONS:

BOUNCE:

Silver

BBM

5 VA

150 mA

5 A

60 V

< 150 mΩ

500 V r

500 V r

10⁹ Ω

10,000

< 5 ms

Gold

BBM

0.5 VA

20 mA

1 A

25 V

< 150 mΩ

500 V r

500 V r

10⁹ Ω

10,000

< 5 ms

Mechanical Data

MAX. NO. OF BANKS: 1.

OPERATING TORQUE: 5 Ncm±20%.

END STOP TORQUE: < 60 Ncm.

STOP: With/without or adjustable

MOUNTING: By fixed index 9.5 mm (0.374) of center, for bushing mount only

Materials

BUSHING/HOUSING: PETP Thermoplastic

STATIONARY CONTACTS & TERMINALS: Nickel Plated Brass with additional plating of Gold or Silver.

ROTOR: Gold or Silver plated Brass or PCB.

CODING PLATE: PA thermoplastic

ACTUATOR: Polysulfon thermoplastic

HARDWARE: Stop pin: Aluminum. Ball & Spring: Stainless steel.

Washer: PA. Nut: Brass.

Environmental Data

OPERATING TEMPERATURE: -20°C to + 70°C -20°C to + 70°C

STORAGE TEMPERATURE: -40°C to + 85°C -40°C to + 85°C

NOTE: Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

Build-A-Switch

To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on pages K-9 thru K-12. For additional options not shown in catalog, consult Customer Service Center.

Designation _____

RTA

Termination _____

P With PC Thru-hole

C With Solder Lugs

H Horizontal with PC Thru-hole

Switch Function

1W12 SP, 30° Index, 12 pos. no stop

1W10 SP, 36° Index, 10 pos. no stop

1S02 SP, 30° /36° Index, 2 pos.

1S03 SP, 30° /36° Index, 3 pos.

1S04 SP, 30° /36° Index, 4 pos.

1S05 SP, 30° /36° Index, 5 pos.

1S06 SP, 30° /36° Index, 6 pos.

1S07 SP, 30° /36° Index, 7 pos.

1S08 SP, 30° /36° Index, 8 pos.

1S09 SP, 30° /36° Index, 9 pos.

1S10 SP, 30° /36° Index, 10 pos.

1S11 SP, 30° Index, 11 pos.

1S12 SP, 30° Index, 12 pos.

2S02 DP, 30° /36° Index, 2 pos.

2S03 DP, 30° /36° Index, 3 pos.

2S04 DP, 30° /36° Index, 4 pos.

2S05 DP, 30° /36° Index, 5 pos.

2S06 DP, 30° Index, 6 pos.

3S02 3P, 30° /36° Index, 2 pos.

Indexing

2 22.5 index (coded only)

3 30° index (12 positions max.)

4 36° index (10 positions max.)

3S03 3P, 30° /36° Index, 3 pos.

4S02 4P, 30° /36° Index, 2 pos.

EW10 Direct + complement, 36° Index, no stop

EW12 Direct + complement, 30° Index, no stop

DW16 Direct, 22.5° Index, no stop

ES _ _ Direct + complement, 30°/36° Index, with stop (specify stop position)

DS _ _ Direct, 22.5° Index, with stop (specify stop position)

Mounting Style

W Without bushing

R 3/8-32 Threaded Bushing

M M10x.75 Metric Threaded Bushing

A 3/8-32 Threaded Bushing with Offset Bracket

B M10x.75 Metric Threaded Bushing with Offset Bracket

Contact Material

S Silver plated, matte-tin terminal

P Gold plated, matte-tin terminal

Actuator (max.)

25N .984 (25,0) with screwdriver slot

50N 1.97 (50,0) with screwdriver slot

FLS Flush shaft with screwdriver slot and position indicator

25F .984 (25,0) Shaft with flat

06F .236 (6,0) Shaft with flat

C 3/8-32 Threaded Bushing with Straight Bracket

D M10x.75 Metric Threaded Bushing with Straight Bracket




Dimensions are shown: Inch (mm)
Specifications and dimensions subject to change

RTA Series 1-4 Poles Coded Rotary Switches

DESIGNATION



RTA




TERMINATION




P

WITH PC PINS

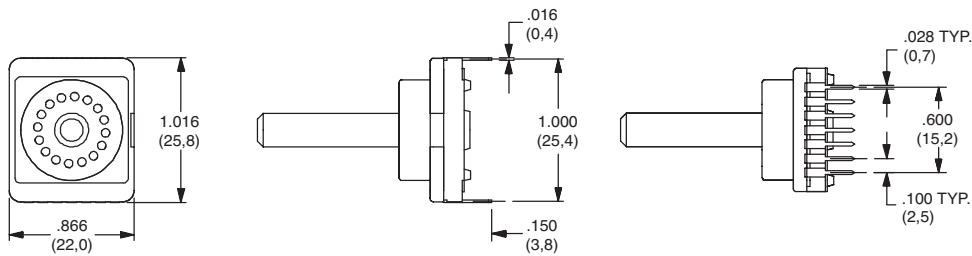


C

WITH SOLDER LUGS

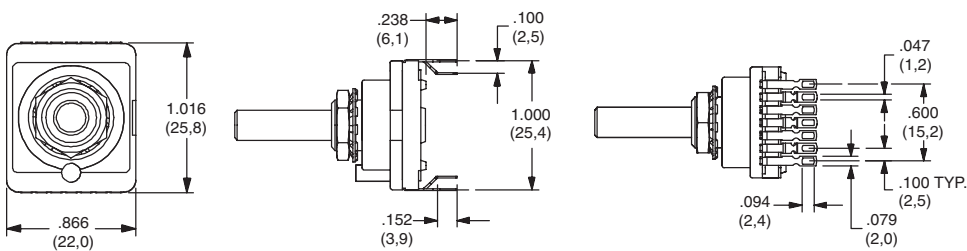

H

Horizontal with PC Thru-hole

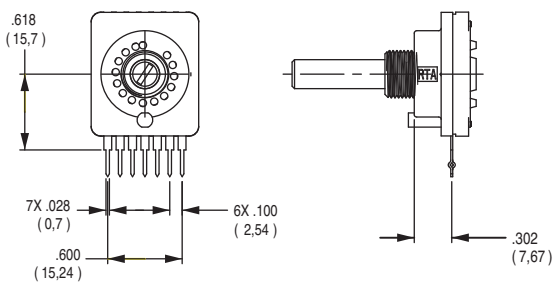

Note: "H" termination only available with the following options:

1. With A or B mounting styles
2. 36° degree indexing
3. Up to 5 positions max

INDEXING



2 22.5 index, 16 positions max.

3 30 index, 12 positions max.

4 36 index, 10 positions max.

Both commons must be connected by user to ground.



Third Angle
Projection

Dimensions are shown: mm
Specifications and dimensions subject to change



K

Rotary

RTA Series


1-4 Poles Coded Rotary Switches

SWITCH FUNCTION




NO. POLES	MODEL NO.	SWITCH FUNCTION	INDEX
SP	1W12	12 Positions No Stop	30°
	1W10	10 Positions No Stop	36°
	1S02	2 Positions	30°/36°
	1S03	3 Positions	30°/36°
	1S05	5 Positions	30°/36°
	1S06	6 Positions	30°/36°
	1S08	8 Positions	30°/36°
	1S09	9 Positions	30°/36°
	1S10	10 Positions	30°/36°
	1S11	11 Positions	30°
	1S12	12 Positions	30°


SP MODELS SCHEMATIC




3P MODELS SCHEMATIC



DP MODELS SCHEMATIC



4P MODELS SCHEMATIC




NO. POLES	MODEL NO.	SWITCH FUNCTION	INDEX
DP	2W05	5 Positions No Stop	30°/36°
	2W06	6 Positions No Stop	30°
	2S02	2 Positions	30°/36°
	2S03	3 Positions	30°/36°
	2S04	4 Positions	30°/36°
	2S05	5 Positions	30°/36°
3P	3S02	2 Positions	30°/36°
	3S03	3 Positions	30°/36°
4P	4S02	2 Positions	30°/36°

MODEL NO.	SWITCH FUNCTION	INDEX
EW10	Direct + complement, No stop	36°
EW12	Direct + complement, No stop	30°
DW16	Direct, No stop	22.5°
ES__	Direct + complement, with stop (specify stop position)	30° & 36°
DS__	Direct, with stop (specify stop position)	22.5°

22.5°	30°	36°		Pos.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Term.	Term.	Term.																		
E,J	M,N	L,N		C	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
F,I	H	D		1		•		•		•		•		•		•		•		•
D,K	D	B		2			•	•			•	•			•	•			•	•
A,N	A	I		4					•	•	•	•					•	•	•	•
B	J	J		8									•	•	•	•	•	•	•	•
—	C	K		1	•		•		•		•		•		•		•		•	
—	K	H		2	•	•			•	•			•	•		•	•			
—	B	A		4	•	•	•	•					•	•	•					
—	I	C		8	•	•	•	•	•	•	•	•								

Indexing Option Code 2, 22.5 INDEXING ANGLE PCB LAYOUT




BCD ONLY


Indexing Option Code 3, 30 INDEXING ANGLE PCB LAYOUT



1 POLE




2 POLES



3 POLES



4 POLES



BCD + COMPLEMENTS


Indexing Option Code 4, 36 INDEXING ANGLE PCB LAYOUT



1 POLE



2 POLES



3 POLES




4 POLES



BCD + COMPLEMENTS

NOTE: Layout view from component side.

Common terminals that are in locations A-G are not connected to common terminals that are in locations H-N. For 7-12 position output customer must tie these commons together.



Third Angle Projection

Dimensions are shown: Inch (mm)

Specifications and dimensions subject to change




RTA Series 1-4 Poles Coded Rotary Switches

MOUNTING STYLE




W WITHOUT BUSHING

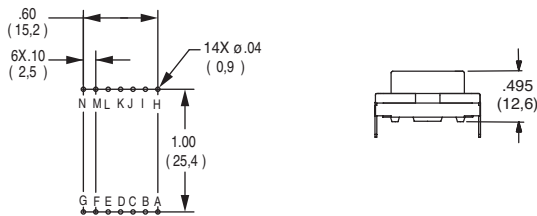


Note: W mounting style not available with H termination.

M M10 x .75 MERTIC THREADED BUSHING

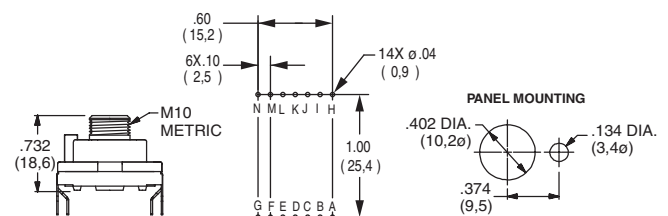


Note: M mounting style not available with H termination.

R 3/8-32 THREADED BUSHING

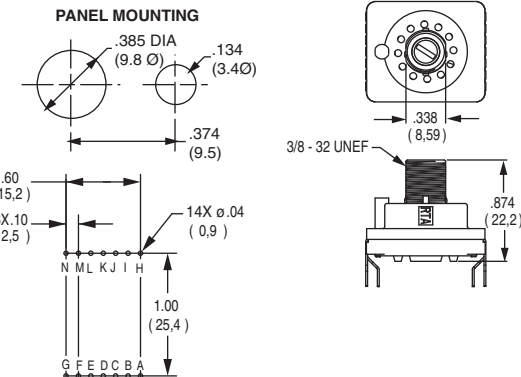


Note: R mounting style not available with H termination.

A 3/8-32 THREADED BUSHING WITH BRACKET

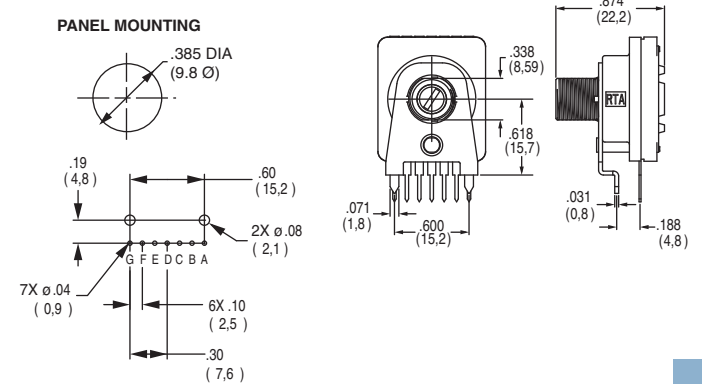


Note: A mounting style only available with H termination.

B M10 x .75 METRIC THREADED BUSHING WITH BRACKET

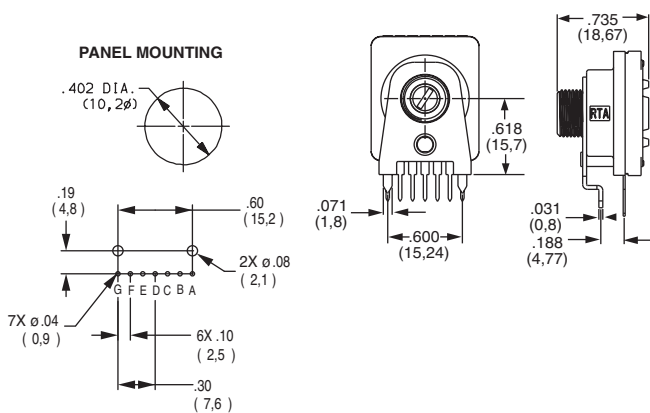


Note: B mounting style only available with H termination.

C 3/8-32 THREADED BUSHING WITH STRAIGHT BRACKET

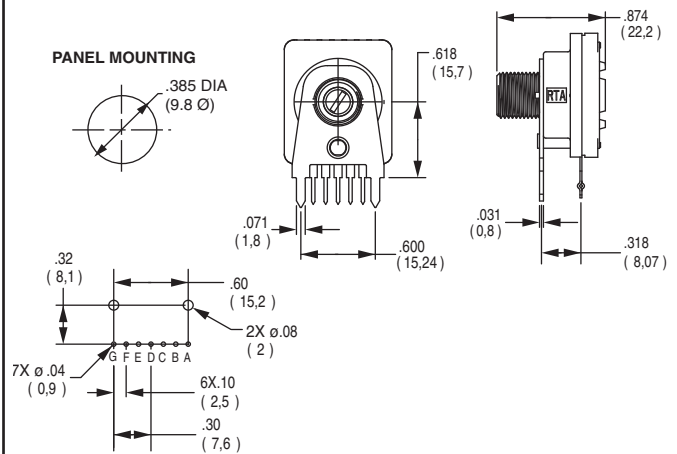

D M10 x .75 METRIC THREADED BUSHING WITH STRAIGHT BRACKET

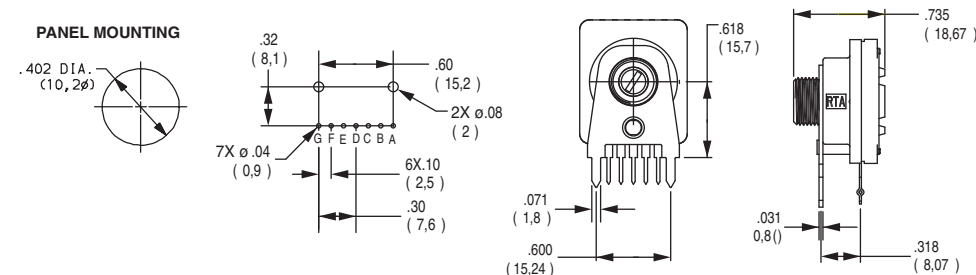

Third Angle
Projection

Dimensions are shown: mm
Specifications and dimensions subject to change




RTA Series


1-4 Poles Coded Rotary Switches

ACTUATOR


25N .984 (25,0) WITH SCREWDRIVER SLOT

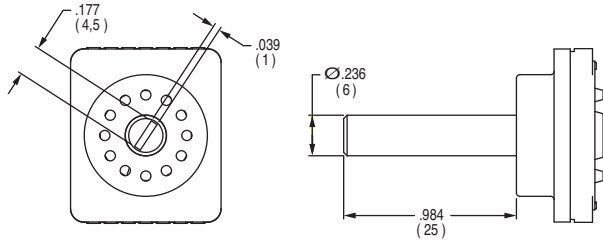

50N 1.97 (50,0) WITH SCREWDRIVER SLOT

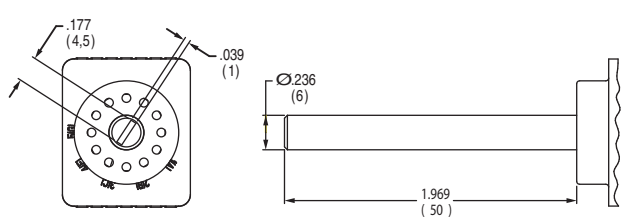


FLS FLUSH SHAFT WITH SCREWDRIVER SLOT AND POSITION INDICATOR

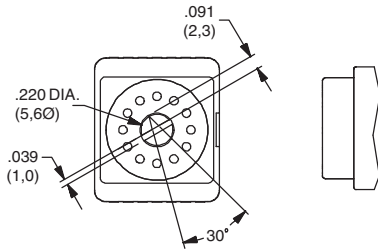


Note: only available with "W" Mounting Style

25F .984 (25,0) SHAFT WITH FLAT

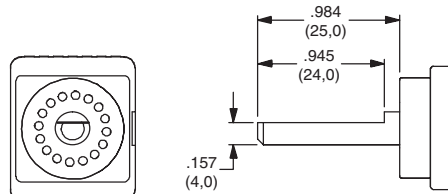

Note: only available with "W" Mounting Style

06F .236 (6,0) SHAFT WITH FLAT



Note: only available with "W" Mounting Style


CONTACT MATERIAL

OPTION CODE	CONTACT AND TERMINAL MATERIAL	RATING	
S	SILVER	LOW LEVEL/DRY CIRCUIT	SWITCH: 150 mA MAXIMUM, 60 V NOMINAL. POWER: 5 VA MAXIMUM. CARRY-5 AMPS MAXIMUM.
P	GOLD	LOW LEVEL/DRY CIRCUIT OR POWER	SWITCH: 20 mA MAXIMUM, 25 V NOMINAL. POWER: 0.5 VA MAXIMUM. CARRY: 1 AMP MAXIMUM.


* Note: See Technical Data section of this catalog for RoHS compliant and compatible definition and specifications.

AVAILABLE HARDWARE

Mounting Nuts



PART NO.
472706201
Standard




PART NO.
495100201
Metric

Stop pins



PART NO.
Y200300200P

Lockwasher



PART NO.
472800202

NOTE: Additional nuts and lockwashers available separately, see section “Technical Data and Additional Hardware”.



Dimensions are shown: Inch (mm)
Specifications and dimensions subject to change



О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.

Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (XC), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

Перечень производителей, продукцию которых мы поставляем на российский рынок





Trade Electronics.ru

гарантия бесперебойности производства и
качества выпускаемой продукции

С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

<http://www.tradeelectronics.ru/>