



### Intellimod™ Module Dual-In-Line Intelligent Power Module 10 Amperes/600 Volts

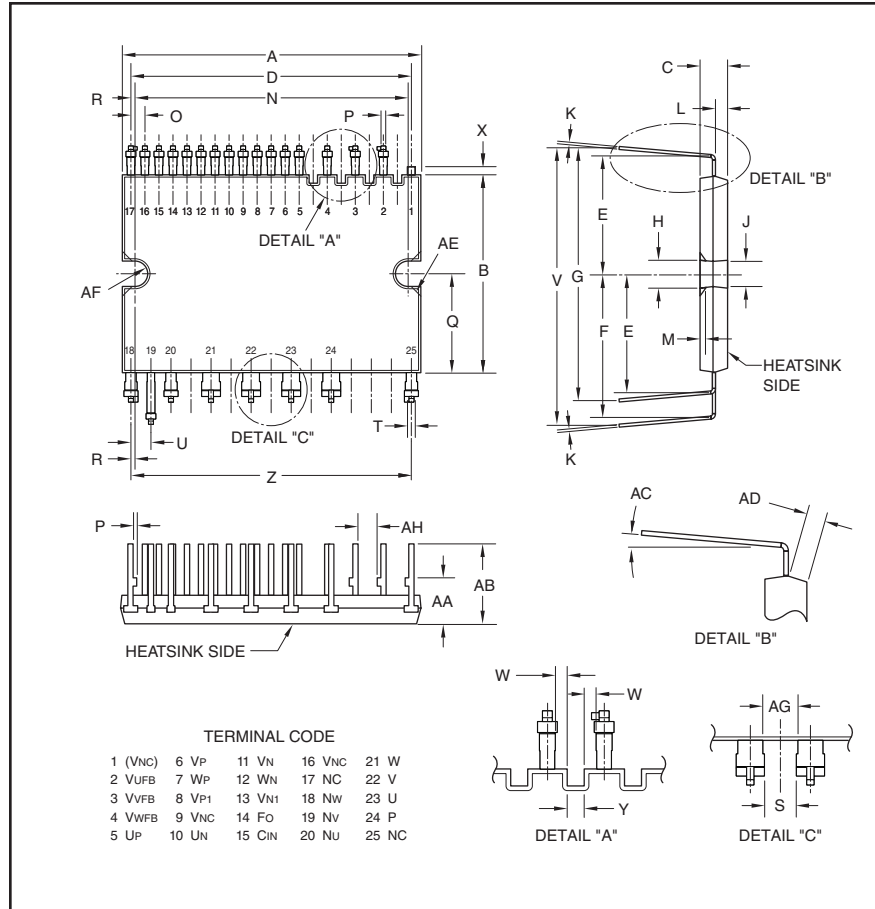

Outline Drawing and Circuit Diagram

| Dimensions | Inches     | Millimeters |
|------------|------------|-------------|
| A          | 1.50±0.02  | 38.0±0.5    |
| B          | 0.94±0.02  | 24.0±0.5    |
| C          | 0.14       | 3.5         |
| D          | 1.40       | 35.56       |
| E          | 0.57±0.02  | 14.4±0.5    |
| F          | 0.74±0.02  | 18.9±0.5    |
| G          | 1.15±0.02  | 29.2±0.5    |
| H          | 0.14       | 3.5         |
| J          | 0.13       | 3.3         |
| K          | 0.016      | 0.4         |
| L          | 0.06±0.02  | 1.5±0.05    |
| M          | 0.031      | 0.8         |
| N          | 1.39±0.019 | 35.0±0.3    |
| O          | 0.07±0.008 | 1.778±0.2   |
| P          | 0.02       | 0.5         |
| Q          | 0.47       | 12.0        |
| R          | 0.011      | 0.28        |

| Dimensions | Inches     | Millimeters |
|------------|------------|-------------|
| S          | 0.12       | 2.8         |
| T          | 0.024      | 0.6         |
| U          | 0.1±0.008  | 2.54±0.2    |
| V          | 1.33±0.02  | 33.7±0.5    |
| W          | 0.03       | 0.678       |
| X          | 0.04       | 1.0         |
| Y          | 0.05       | 1.2         |
| Z          | 1.40       | 35.56       |
| AA         | 0.22±0.02  | 5.5±0.5     |
| AB         | 0.37±0.02  | 9.5±0.5     |
| AC         | 0 ~ 5°     | 0 ~ 5°      |
| AD         | 0.06 Min.  | 1.5 Min.    |
| AE         | 0.05       | 1.2         |
| AF         | 0.063 Rad. | 1.6 Rad.    |
| AG         | 0.118 Min. | 3.0 Min.    |
| AH         | 0.098 Min. | 2.5 Min.    |

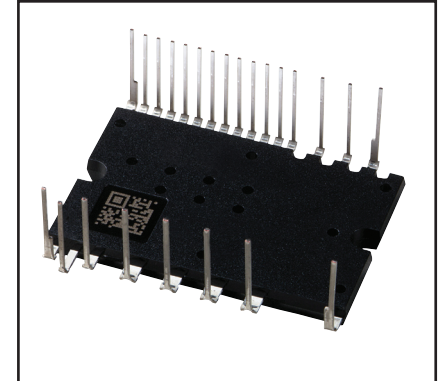

#### Description:

DIP-IPMs are intelligent power modules that integrate power devices, drivers, and protection circuitry in an ultra compact dual-in-line transfer-mold package for use in driving small three phase motors. Use of 5th generation IGBTs, DIP packaging, and application specific HVICs allow the designer to reduce inverter size and overall design time.

#### Features:

- ☐ Compact Packages
- ☐ Single Power Supply
- ☐ Integrated HVICs
- ☐ Direct Connection to CPU
- ☐ Reduced  $R_{th}$

#### Applications:

- ☐ Refrigerators
- ☐ Air Conditioners
- ☐ Small Servo Motors
- ☐ Small Motor Control

#### Ordering Information:

PS21963-4S is a 600V, 10 Ampere short pin DIP Intelligent Power Module.

## PS21963-4S

### Intellimod™ Module

### Dual-In-Line Intelligent Power Module

10 Amperes/600 Volts

## Absolute Maximum Ratings, $T_j = 25^\circ\text{C}$ unless otherwise specified

| Characteristics                                                                    | Symbol                 | PS21963-4S | Units            |
|------------------------------------------------------------------------------------|------------------------|------------|------------------|
| Power Device Junction Temperature*                                                 | $T_j$                  | -20 to 150 | $^\circ\text{C}$ |
| Storage Temperature                                                                | $T_{\text{stg}}$       | -40 to 125 | $^\circ\text{C}$ |
| Case Operating Temperature (Note 1)                                                | $T_C$                  | -20 to 100 | $^\circ\text{C}$ |
| Mounting Torque, M3 Mounting Screws                                                | —                      | 6          | in-lb            |
| Module Weight (Typical)                                                            | —                      | 10         | Grams            |
| Heatsink Flatness (Note 2)                                                         | —                      | -50 to 100 | $\mu\text{m}$    |
| Self-protection Supply Voltage Limit (Short Circuit Protection Capability)**       | $V_{\text{CC(prot.)}}$ | 400        | Volts            |
| Isolation Voltage, AC 1 minute, 60Hz Sinusoidal, Connection Pins to Heatsink Plate | $V_{\text{ISO}}$       | 1500       | Volts            |

\*The maximum junction temperature rating of the power chips integrated within the DIP-IPM is  $150^\circ\text{C}$  ( $@T_C \leq 100^\circ\text{C}$ ). However, to ensure safe operation of the DIP-IPM, the average junction temperature should be limited to  $T_{j(\text{avg})} \leq 125^\circ\text{C}$  ( $@T_C \leq 100^\circ\text{C}$ ).

\*\* $V_D = 13.5 \sim 16.5\text{V}$ , Inverter Part,  $T_j = 125^\circ\text{C}$ , Non-repetitive, Less than  $2\mu\text{s}$


## IGBT Inverter Sector

|                                                                                |                        |     |         |
|--------------------------------------------------------------------------------|------------------------|-----|---------|
| Collector-Emitter Voltage                                                      | $V_{\text{CES}}$       | 600 | Volts   |
| Each Collector Current, $\pm$ ( $T_C = 25^\circ\text{C}$ )                     | $I_C$                  | 10  | Amperes |
| Each Peak Collector Current, $\pm$ ( $T_C = 25^\circ\text{C}$ , Less than 1ms) | $I_{\text{CP}}$        | 20  | Amperes |
| Supply Voltage (Applied between P - N)                                         | $V_{\text{CC}}$        | 450 | Volts   |
| Supply Voltage, Surge (Applied between P - N)                                  | $V_{\text{CC(surge)}}$ | 500 | Volts   |
| Collector Dissipation ( $T_C = 25^\circ\text{C}$ , per 1 Chip)                 | $P_C$                  | 27  | Watts   |


## Control Sector

|                                                                                                            |                 |                       |       |
|------------------------------------------------------------------------------------------------------------|-----------------|-----------------------|-------|
| Supply Voltage (Applied between $V_{P1}-V_{\text{NC}}$ , $V_{N1}-V_{\text{NC}}$ )                          | $V_D$           | 20                    | Volts |
| Supply Voltage (Applied between $V_{\text{UFB-U}}$ , $V_{\text{VFB-V}}$ , $V_{\text{WFB-W}}$ )             | $V_{\text{DB}}$ | 20                    | Volts |
| Input Voltage (Applied between $U_P$ , $V_P$ , $W_P-V_{\text{NC}}$ , $U_N$ , $V_N$ , $W_N-V_{\text{NC}}$ ) | $V_{\text{IN}}$ | $-0.5 \sim V_D + 0.5$ | Volts |
| Fault Output Supply Voltage (Applied between $F_O-V_{\text{NC}}$ )                                         | $V_{\text{FO}}$ | $-0.5 \sim V_D + 0.5$ | Volts |
| Fault Output Current (Sink Current at $F_O$ Terminal)                                                      | $I_{\text{FO}}$ | 1                     | mA    |
| Current Sensing Input Voltage (Applied between $C_{\text{IN}}-V_{\text{NC}}$ )                             | $V_{\text{SC}}$ | $-0.5 \sim V_D + 0.5$ | Volts |

Note 1 –  $T_C$  Measure Point

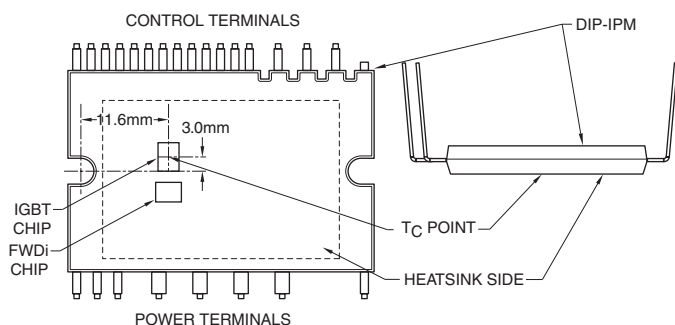

Note 2 – Flatness Measurement Position

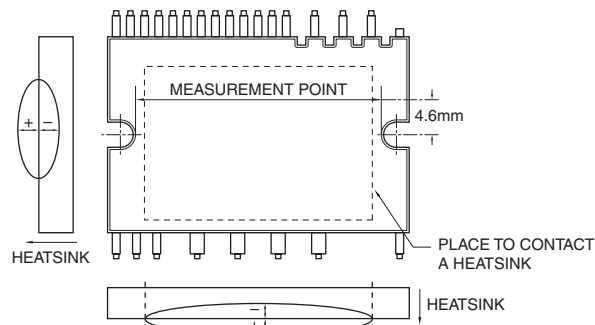

**PS21963-4S**  
**Intellimod™ Module**  
**Dual-In-Line Intelligent Power Module**  
10 Amperes/600 Volts

### Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

| Characteristics                      | Symbol        | Test Conditions                                                                            | Min. | Typ. | Max. | Units         |
|--------------------------------------|---------------|--------------------------------------------------------------------------------------------|------|------|------|---------------|
| <b>IGBT Inverter Sector</b>          |               |                                                                                            |      |      |      |               |
| Collector-Emitter Saturation Voltage | $V_{CE(sat)}$ | $V_D = V_{DB} = 15\text{V}, I_C = 10\text{A}, V_{IN} = 5\text{V}, T_j = 25^\circ\text{C}$  | —    | 1.70 | 2.20 | Volts         |
|                                      |               | $V_D = V_{DB} = 15\text{V}, I_C = 10\text{A}, V_{IN} = 5\text{V}, T_j = 125^\circ\text{C}$ | —    | 1.80 | 2.30 | Volts         |
| Diode Forward Voltage                | $V_{EC}$      | $-I_C = 10\text{A}, V_{IN} = 0\text{V}$                                                    | —    | 1.70 | 2.20 | Volts         |
| Inductive Load Switching Times       | $t_{on}$      |                                                                                            | 0.60 | 1.10 | 1.70 | $\mu\text{s}$ |
|                                      | $t_{rr}$      | $V_{CC} = 300\text{V}, V_D = V_{DB} = 15\text{V},$                                         | —    | 0.30 | —    | $\mu\text{s}$ |
|                                      | $t_{C(on)}$   | $I_C = 10\text{A}, T_j = 125^\circ\text{C},$                                               | —    | 0.40 | 0.60 | $\mu\text{s}$ |
|                                      | $t_{off}$     | $V_{IN} = 0 \leftrightarrow 5\text{V}, \text{Inductive Load},$                             | —    | 1.50 | 2.10 | $\mu\text{s}$ |
|                                      | $t_{C(off)}$  |                                                                                            | —    | 0.50 | 0.80 | $\mu\text{s}$ |
|                                      |               |                                                                                            |      |      |      |               |
| Collector Cutoff Current             | $I_{CES}$     | $V_{CE} = V_{CES}, T_j = 25^\circ\text{C}$                                                 | —    | —    | 1.0  | mA            |
|                                      |               | $V_{CE} = V_{CES}, T_j = 125^\circ\text{C}$                                                | —    | —    | 10   | mA            |

### Control Sector

|                                                |               |                                                                                       |                                         |      |      |      |               |
|------------------------------------------------|---------------|---------------------------------------------------------------------------------------|-----------------------------------------|------|------|------|---------------|
| Circuit Current<br>$V_D = V_{DB} = 15\text{V}$ | $I_D$         | $V_{IN} = 5\text{V}$                                                                  | Total of $V_{P1}-V_{NC}, V_{N1}-V_{NC}$ | —    | —    | 2.80 | mA            |
|                                                |               |                                                                                       | $V_{UFB-U}, V_{VFB-V}, V_{WFB-W}$       | —    | —    | 0.55 | mA            |
|                                                |               | $V_{IN} = 0\text{V}$                                                                  | Total of $V_{P1}-V_{NC}, V_{N1}-V_{NC}$ | —    | —    | 2.80 | mA            |
|                                                |               |                                                                                       | $V_{UFB-U}, V_{VFB-V}, V_{WFB-W}$       | —    | —    | 0.55 | mA            |
| Fault Output Voltage                           | $V_{FOH}$     | $V_{SC} = 0\text{V}, F_O \text{ Terminal Pull-up to } 5\text{V by } 10\text{k}\Omega$ |                                         | 4.9  | —    | —    | Volts         |
|                                                | $V_{FOL}$     | $V_{SC} = 1\text{V}, I_{FO} = 1\text{mA}$                                             |                                         | —    | —    | 0.95 | Volts         |
| Input Current                                  | $I_{IN}$      | $V_{IN} = 5\text{V}$                                                                  |                                         | 0.70 | 1.00 | 1.50 | mA            |
| Short Circuit Trip Level*                      | $V_{SC(ref)}$ | $V_D = 15\text{V}^*$                                                                  |                                         | 0.43 | 0.48 | 0.53 | Volts         |
| Supply Circuit Under-voltage                   | $UV_{DBt}$    | Trip Level, $T_j \leq 125^\circ\text{C}$                                              |                                         | 10.0 | —    | 12.0 | Volts         |
|                                                | $UV_{DBr}$    | Reset Level, $T_j \leq 125^\circ\text{C}$                                             |                                         | 10.5 | —    | 12.5 | Volts         |
|                                                | $UV_{Dt}$     | Trip Level, $T_j \leq 125^\circ\text{C}$                                              |                                         | 10.3 | —    | 12.5 | Volts         |
|                                                | $UV_{Dr}$     | Reset Level, $T_j \leq 125^\circ\text{C}$                                             |                                         | 10.8 | —    | 13.0 | Volts         |
| Fault Output Pulse Width**                     | $t_{FO}$      |                                                                                       |                                         | 20   | —    | —    | $\mu\text{s}$ |
| ON Threshold Voltage                           | $V_{th(on)}$  | Applied between                                                                       |                                         | —    | 2.1  | 2.6  | Volts         |
| OFF Threshold Voltage                          | $V_{th(off)}$ | $U_P, V_P, W_P-V_{NC},$                                                               |                                         | 0.8  | 1.3  | —    | Volts         |
| ON/OFF Threshold Hysteresis Voltage            | $V_{th(hys)}$ | $U_N, V_N, W_N-V_{NC}$                                                                |                                         | 0.35 | 0.65 | —    | Volts         |

\* Short Circuit protection is functioning only for the low-arms. Please select the value of the external shunt resistor such that the  $S_C$  trip level is less than 1.7 times the current rating.

\*\*Fault signal is asserted only for a  $U_V$  or  $S_C$  condition on the low side. On a  $S_C$  fault the  $F_O$  duration will be 20 $\mu\text{sec}$ . On a  $U_V$  condition the fault signal will be asserted as long as the  $U_V$  condition exists or for 20 $\mu\text{sec}$ , whichever is longer.



Powerex, Inc., 173 Pavilion Lane, Youngwood, Pennsylvania 15697 (724) 925-7272

PS21963-4S

Intellimod™ Module

Dual-In-Line Intelligent Power Module

10 Amperes/600 Volts

## Thermal Characteristics

| Characteristic   | Symbol         | Condition                      | Min. | Typ. | Max. | Units   |
|------------------|----------------|--------------------------------|------|------|------|---------|
| Junction to Case | $R_{th(j-c)Q}$ | Inverter IGBT (Per 1/6 Module) | —    | —    | 3.7  | °C/Watt |
|                  | $R_{th(j-c)D}$ | Inverter FWDi (Per 1/6 Module) | —    | —    | 4.5  | °C/Watt |


## Recommended Conditions for Use

| Characteristic                  | Symbol             | Condition                                                  | Min. | Typ. | Value | Units      |
|---------------------------------|--------------------|------------------------------------------------------------|------|------|-------|------------|
| Supply Voltage                  | $V_{CC}$           | Applied between P-N Terminals                              | 0    | 300  | 400   | Volts      |
| Control Supply Voltage          | $V_D$              | Applied between $V_{P1}$ - $V_{NC}$ , $V_{N1}$ - $V_{NC}$  | 13.5 | 15.0 | 16.5  | Volts      |
|                                 | $V_{DB}$           | Applied between $V_{UFB-U}$ ,<br>$V_{VFB-V}$ , $V_{WFB-W}$ | 13.0 | 15.0 | 18.5  | Volts      |
| Control Supply Variation        | $dV_D$ , $dV_{DB}$ |                                                            | -1   | —    | 1     | V/ $\mu$ s |
| Arm Shoot-through Blocking Time | $t_{DEAD}$         | For Each Input Signal, $T_C \leq 100^\circ\text{C}$        | 1.5  | —    | —     | $\mu$ s    |
| Allowable Minimum Input         | $P_{WIN(on)}$      |                                                            | 0.5  | —    | —     | $\mu$ s    |
| Pulse Width*                    | $P_{WIN(off)}$     |                                                            | 0.5  | —    | —     | $\mu$ s    |
| $V_{NC}$ Voltage Variation      | $V_{NC}$           | Between $V_{NC-N}$ (Including Surge)                       | -5.0 | —    | 5.0   | Volts      |

\*DIP-IPM might not make response or work properly if the input signal pulse width is less than the recommended minimum value.

**PS21963-4S**  
**Intellimod™ Module**  
**Dual-In-Line Intelligent Power Module**  
 10 Amperes/600 Volts

## Application Circuit

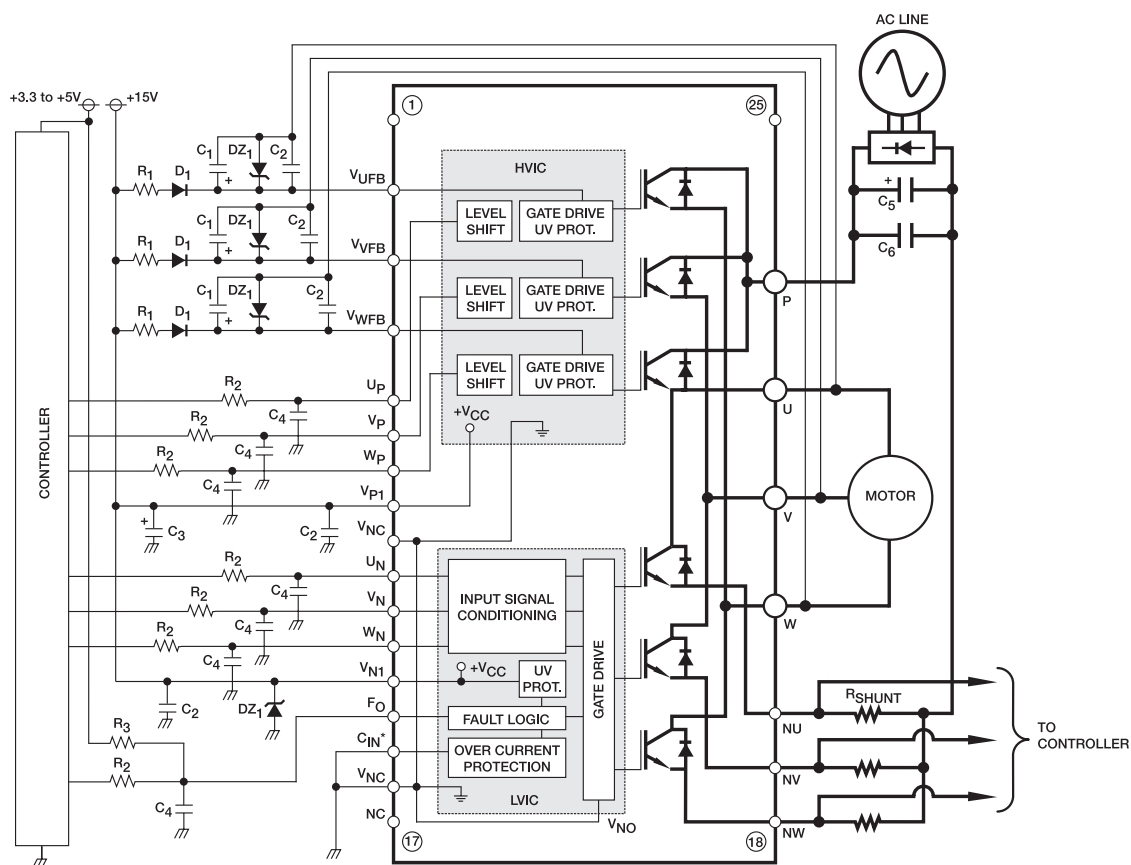

\*See Note 7

### Component Selection:

| Dsgn.  | Typ. Value       | Description                                                                             |
|--------|------------------|-----------------------------------------------------------------------------------------|
| D1     | 1A, 600V         | Boot strap supply diode – Ultra fast recovery                                           |
| DZ1    | 24V, 1.0W        | Control and boot strap supply over voltage suppression                                  |
| C1     | 10-100uF, 50V    | Boot strap supply reservoir – Electrolytic, long life, low Impedance, 105°C (Note 5)    |
| C2     | 0.22-2.0uF, 50V  | Local decoupling/High frequency noise filters – Multilayer ceramic (Note 8)             |
| C3     | 10-100uF, 50V    | Control power supply filter – Electrolytic, long life, low Impedance, 105°C             |
| C4     | 100pF, 50V       | Optional Input signal noise filter – Multilayer ceramic (Note 1)                        |
| C5     | 200-2000uF, 450V | Main DC bus filter capacitor – Electrolytic, long life, high ripple current, 105°C      |
| C6     | 0.1-0.22uF, 450V | Surge voltage suppression capacitor – Polyester/Polypropylene film (Note 9)             |
| RSHUNT | 5-100mohm        | Current sensing resistor – Non-inductive, temperature stable, tight tolerance (Note 10) |
| R1     | 10 ohm           | Boot strap supply inrush limiting resistor (Note 5)                                     |
| R2     | 330 ohm          | Optional control input noise filter (Note 1, Note 2)                                    |
| R3     | 10k ohm          | Fault output signal pull-up resistor (Note 3)                                           |

### Notes:

- 1) To prevent input signal oscillations minimize wiring length to controller (~2cm). Additional RC filtering (C5 etc.) may be required. If filtering is added be careful to maintain proper dead time and voltage levels. See application notes for details.
- 2) Internal HVIC provides high voltage level shifting allowing direct connection of all six driving signals to the controller.
- 3) FO output is an open collector type. Pull up resistor (R3) should be adjusted to current sink capability of the controller.
- 4) Use only one VNC Pin (either 9 or 16) and leave the other open.
- 5) Boot strap supply component values must be adjusted depending on the PWM frequency and technique.
- 6) Wiring length associated with RSHUNT, must be minimized to avoid improper operation of the OC function.
- 7) Shows short circuit protection disabled. See application notes for use of short circuit protection.
- 8) Local decoupling/high frequency filter capacitors must be connected as close as possible to the modules pins.
- 9) The length of the DC link wiring between C5, C6, the DIP's P terminal and the shunt must be minimized to prevent excessive transient voltages. In particular C6 should be mounted as close to the DIP as possible.
- 10) Use high quality, tight tolerance current sensing resistor. Connect resistor as close as possible to the DIP's N terminal. Be careful to check for proper power rating. See application notes for calculation of resistance value.

PS21963-4S


Intellimod™ Module

Dual-In-Line Intelligent Power Module

10 Amperes/600 Volts


## Protection Function Timing Diagrams

Short-Circuit Protection (Lower-arms only with the external shunt resistor and CR filter)

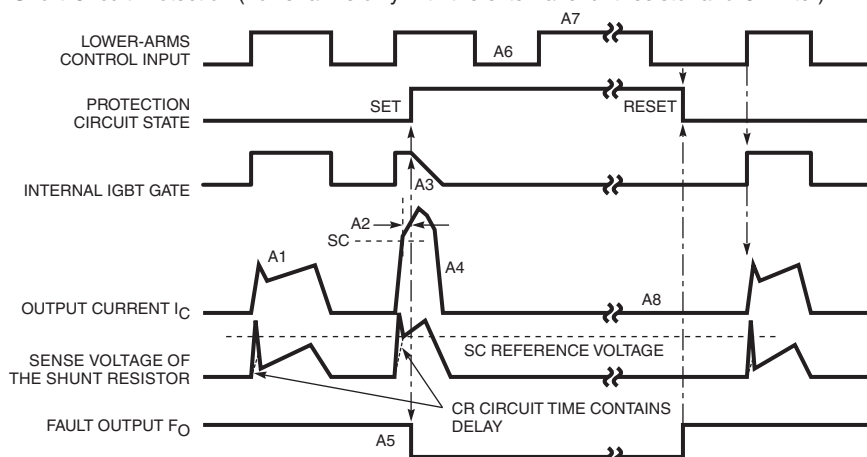

- A1: Normal operation – IGBT turn on and conducting current.
- A2: Short-circuit current detected (SC trigger).
- A3: IGBT gate hard interrupted.
- A4: IGBT turn off.
- A5:  $F_O$  output with a fixed pulse width of  $t_{FO(min)} = 20\mu s$ .
- A6: Input "L" – IGBT off.
- A7: Input "H" – IGBT on is blocked during the  $F_O$  output period.
- A8: IGBT stays in off state.

Under-Voltage Protection (Lower-side,  $UV_D$ )

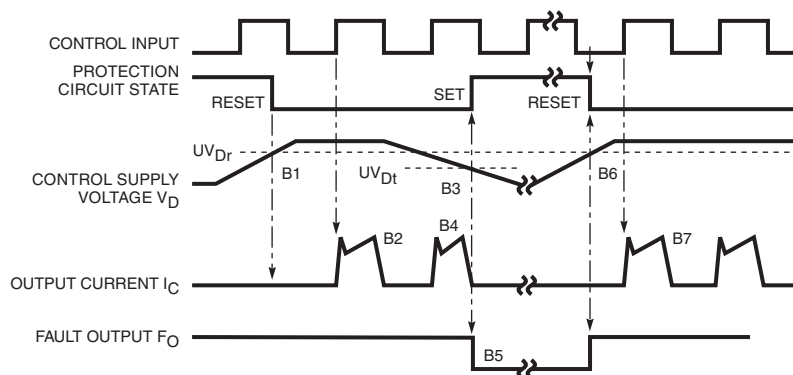


- B1: Control supply voltage rise – After the voltage level reaches  $UV_{Dr}$ , the drive circuit begins to work at the rising edge of the next input signal.
- B2: Normal operation – IGBT turn on and conducting current.
- B3: Under-voltage trip ( $UV_{Dt}$ ).
- B4: IGBT turn off regardless of the control input level.
- B5:  $F_O$  output during under-voltage period, however, the minimum pulse width is  $20\mu s$ .
- B6: Under-voltage reset ( $UV_{Dr}$ ).
- B7: Normal operation – IGBT turn on and conducting current.

**PS21963-4S**  
**Intellimod™ Module**  
**Dual-In-Line Intelligent Power Module**  
 10 Amperes/600 Volts


## Protection Function Timing Diagrams

Under-Voltage Protection (Upper-side,  $UV_{DB}$ )

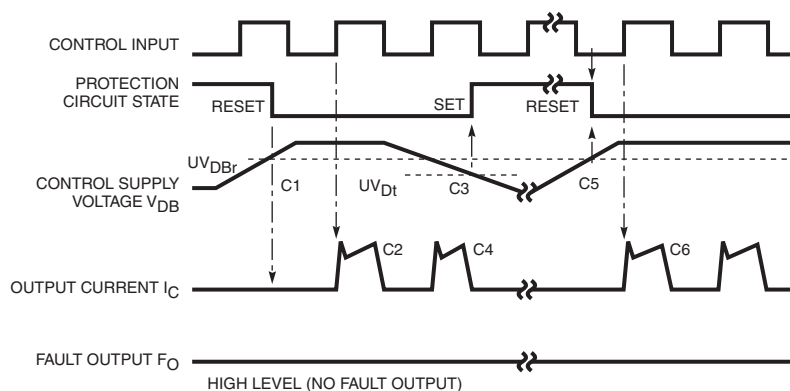


- C1: Control supply voltage rises – After the voltage level reaches  $UV_{DBr}$ , the drive circuit begins to work at the rising edge of the next input signal.
- C2: Normal operation – IGBT turn on and conducting current.
- C3: Under-voltage trip ( $UV_{DBt}$ ).
- C4: IGBT stays off regardless of the control input level, but there is no  $F_O$  signal output.
- C5: Under-voltage reset ( $UV_{Dr}$ ).
- C6: Normal operation – IGBT turn on and conducting current.

## Typical Interface Circuit

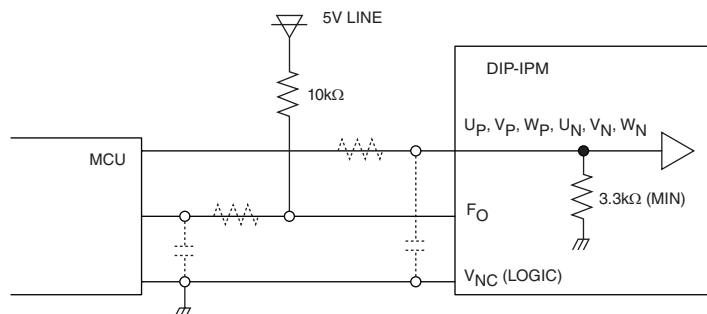

NOTE: RC coupling at each input (parts shown dotted) may change depending on the PWM control scheme used in the application and the wiring impedance of the printed circuit board. The DIP-IPM input signal section integrates a 3.3kΩ (min) pull-down resistor. Therefore, when using an external filtering resistor, care must be taken to satisfy the turn-on threshold voltage requirement.

## Wiring Method Around Shunt Resistor

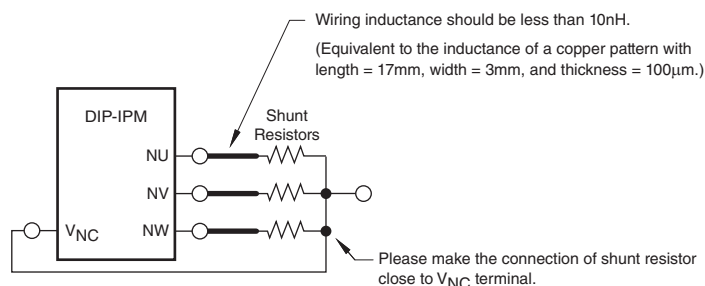


PS21963-4S

Intellimod™ Module


Dual-In-Line Intelligent Power Module

10 Amperes/600 Volts


OUTPUT CHARACTERISTICS  
(TYPICAL - INVERTER PART)

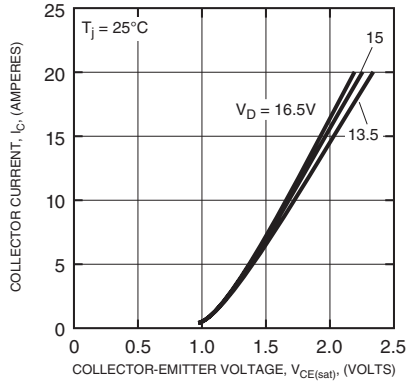


COLLECTOR-EMITTER  
SATURATION VOLTAGE CHARACTERISTICS  
(TYPICAL - INVERTER PART)

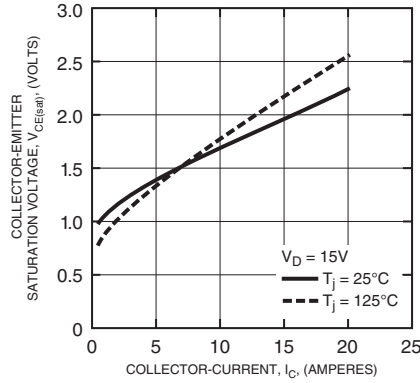


COLLECTOR-EMITTER SATURATION VOLTAGE  
VS. SUPPLY VOLTAGE CHARACTERISTICS  
(TYPICAL - INVERTER PART)

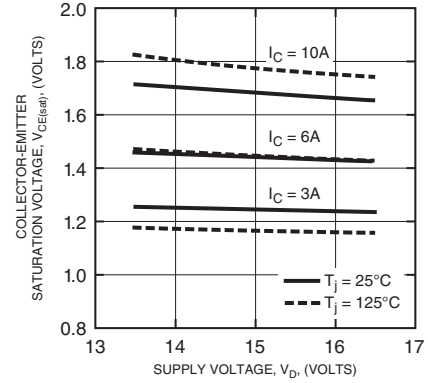


FREE-WHEEL DIODE  
FORWARD CHARACTERISTICS  
(TYPICAL - INVERTER PART)

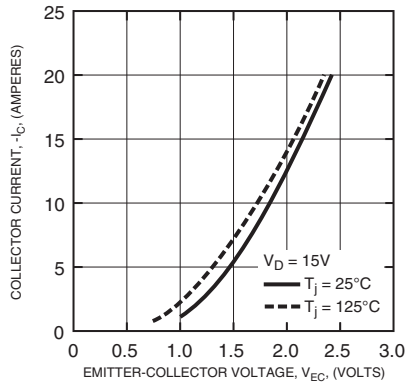


REVERSE RECOVERY CHARACTERISTICS  
(TYPICAL - INVERTER PART N-SIDE)

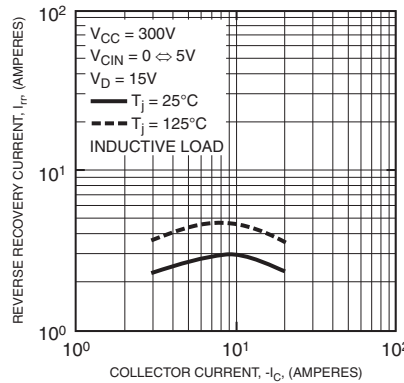


REVERSE RECOVERY CHARACTERISTICS  
(TYPICAL - INVERTER PART N-SIDE)

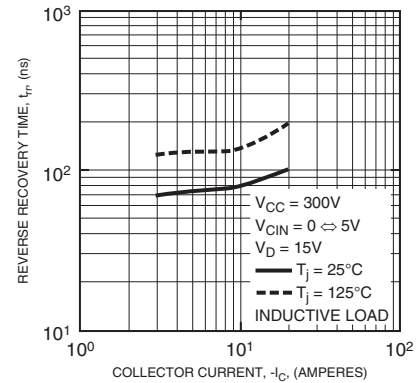


REVERSE RECOVERY CHARACTERISTICS  
(TYPICAL - INVERTER PART P-SIDE)

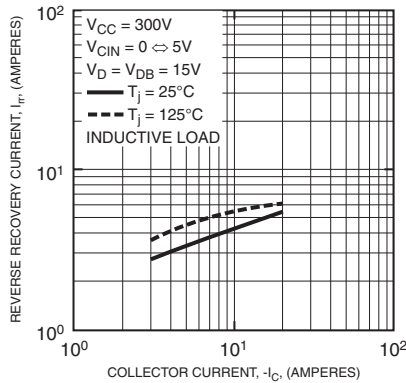

REVERSE RECOVERY CHARACTERISTICS  
(TYPICAL - INVERTER PART P-SIDE)

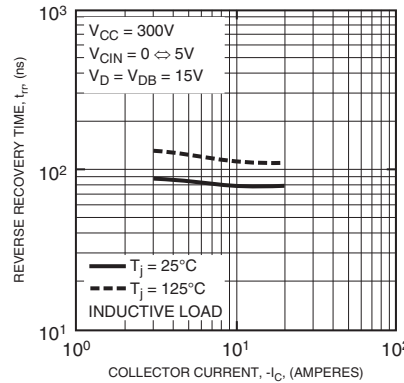

SWITCHING LOSS (ON) VS.  
COLLECTOR CURRENT  
(TYPICAL - INVERTER PART N-SIDE)









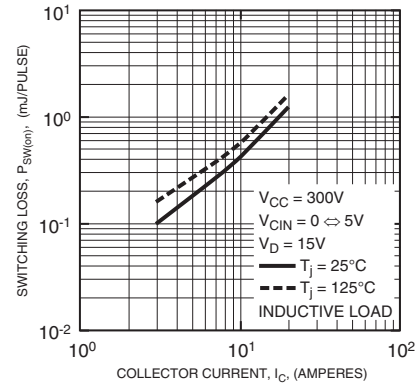


## PS21963-4S

### Intellimod™ Module

### Dual-In-Line Intelligent Power Module

10 Amperes/600 Volts

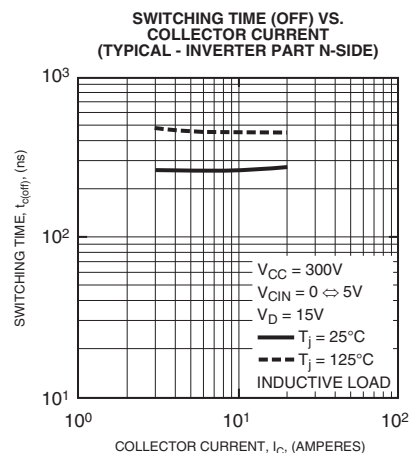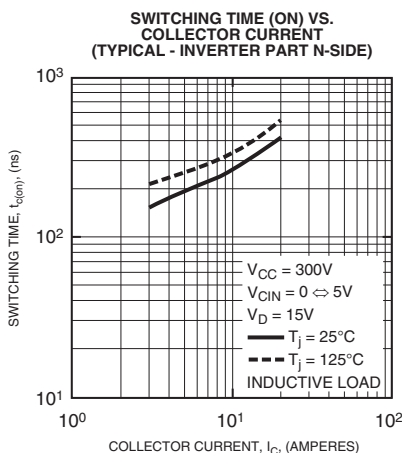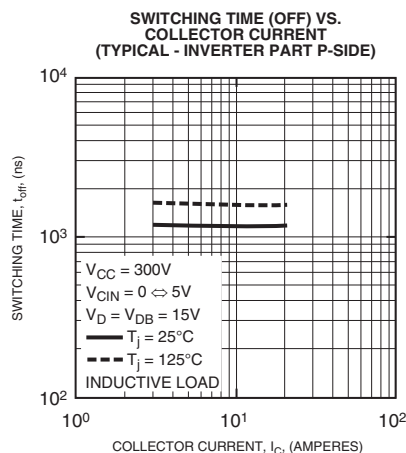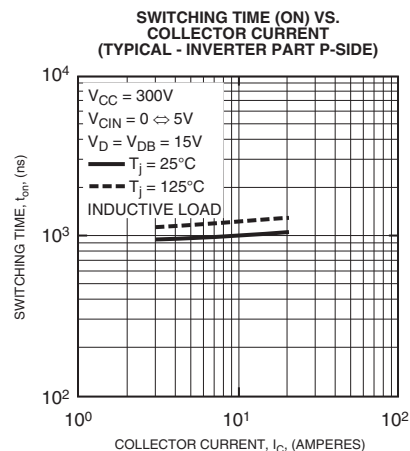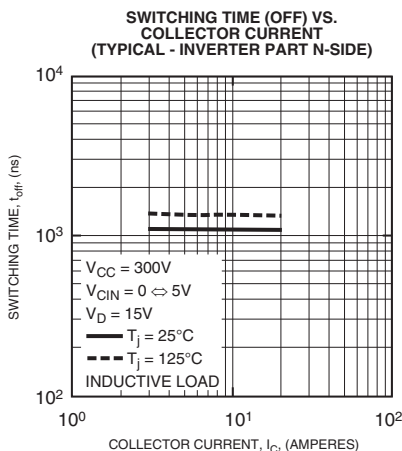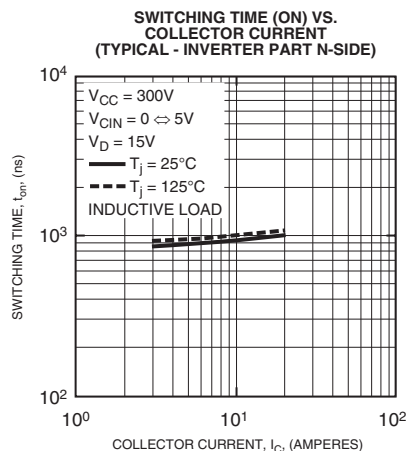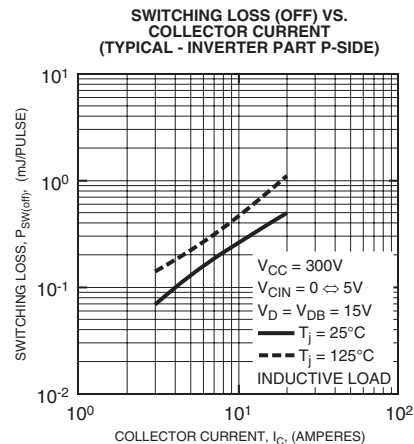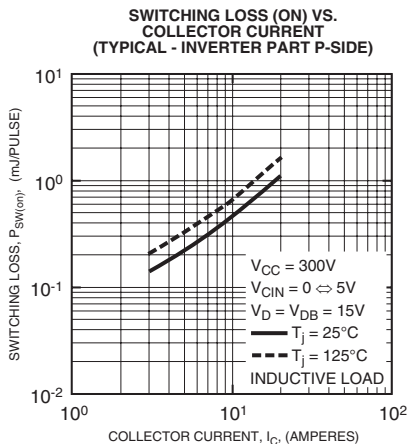
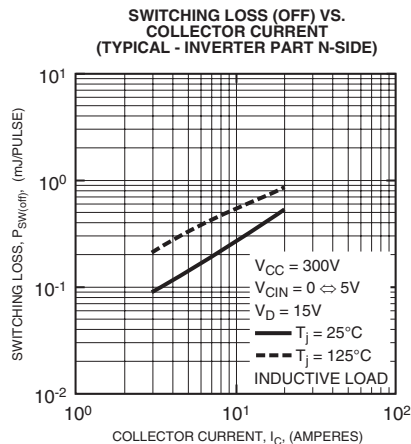


## PS21963-4S

### Intellimod™ Module

### Dual-In-Line Intelligent Power Module

10 Amperes/600 Volts

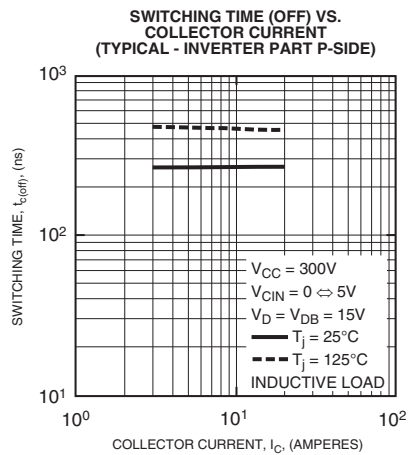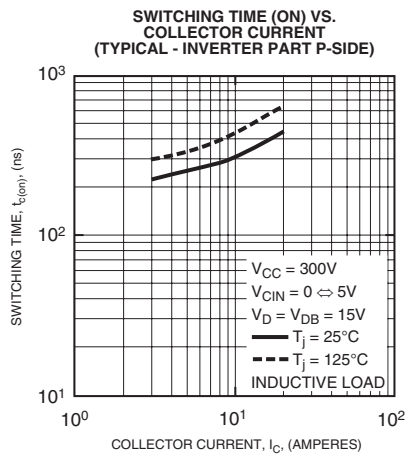



## О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

**Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.**

### Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (XC), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

## Перечень производителей, продукцию которых мы поставляем на российский рынок





Trade Electronics.ru

гарантия бесперебойности производства и  
качества выпускаемой продукции

С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

<http://www.tradeelectronics.ru/>