


Features

- Diffused Junction
- Fast Switching for High Efficiency
- High Current Capability and Low Forward Voltage Drop
- Surge Overload Rating to 30A Peak
- Low Reverse Leakage Current
- **Lead Free Finish, RoHS Compliant (Note 4)**

Mechanical Data

- Case: DO-41, A-405
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminals: Finish - Bright Tin. Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Mounting Position: Any
- Ordering Information: See Last Page
- Marking: Type Number
- Weight: DO-41 0.35 grams (approximate)
A-405 0.20 grams (approximate)

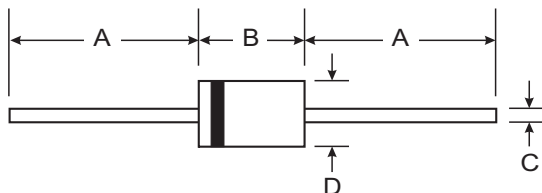

Dim	DO-41 Plastic		A-405	
	Min	Max	Min	Max
A	25.40	—	25.40	—
B	4.06	5.21	4.10	5.20
C	0.71	0.864	0.53	0.64
D	2.00	2.72	2.00	2.70
All Dimensions in mm				

"L" Suffix Designates A-405 Package
No Suffix Designates DO-41 Package

Maximum Ratings and Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

Characteristic	Symbol	1N4933/L	1N4934/L	1N4935/L	1N4936/L	1N4937/L	Unit
Peak Repetitive Reverse Voltage	V_{RRM}						
Working Peak Reverse Voltage	V_{RWM}	50	100	200	400	600	V
DC Blocking Voltage	V_R						
RMS Reverse Voltage	$V_{R(RMS)}$	35	70	140	280	420	V
Average Rectified Output Current (Note 1)	I_O	1.0					A
@ $T_A = 75^\circ\text{C}$							
Non-Repetitive Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	30					A
Forward Voltage Drop	V_{FM}	1.2					V
@ $I_F = 1.0\text{A}$							
Peak Reverse Current	I_{RM}	5.0					μA
@ $T_A = 25^\circ\text{C}$							
@ $T_A = 100^\circ\text{C}$		100					
Reverse Recovery Time (Note 3)	t_{rr}	200					ns
Typical Junction Capacitance (Note 2)	C_j	15					pF
Typical Thermal Resistance Junction to Ambient	$R_{\theta JA}$	100					K/W
Operating and Storage Temperature Range	T_J, T_{STG}	-65 to +150					$^\circ\text{C}$

- Notes:
1. Leads maintained at ambient temperature at a distance of 9.5mm from the case.
 2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.
 3. Measured with $I_F = 0.5\text{A}$, $I_R = 1\text{A}$, $t_{rr} = 0.25\text{A}$.
 4. RoHS revision 13.2.2003. Glass and High Temperature Solder Exemptions Applied, see EU Directive Annex Notes 5 and 7.

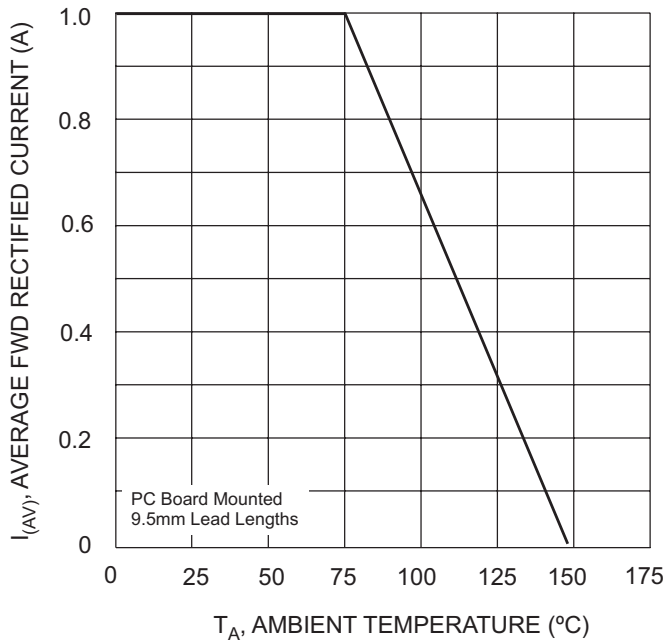


Fig. 1 Forward Current Derating Curves

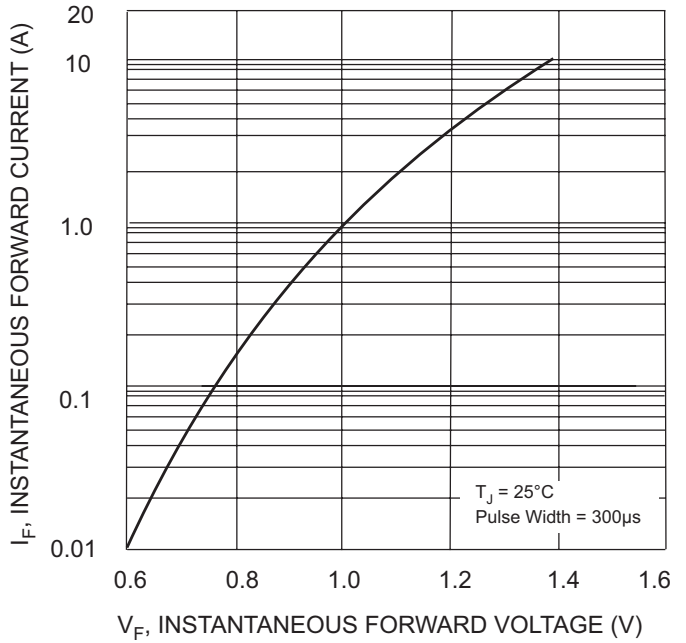


Fig. 2 Typical Forward Characteristics

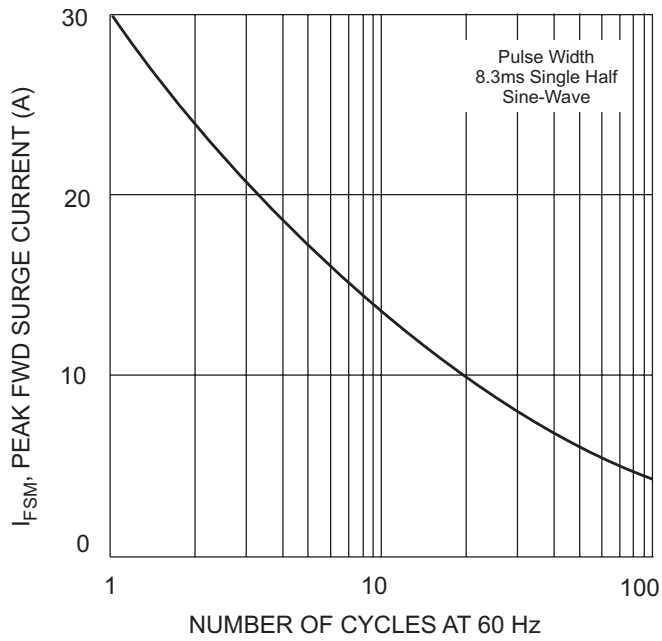


Fig. 3 Max Non-Repetitive Peak Fwd Surge Current

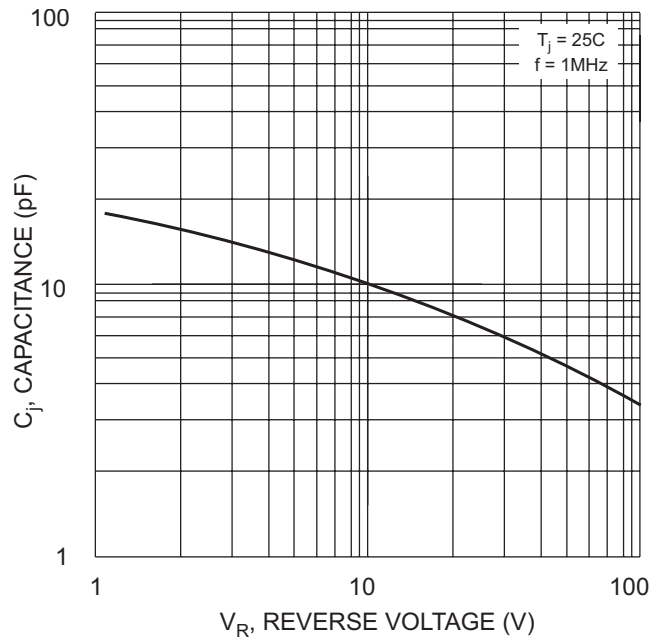


Fig. 4 Typical Junction Capacitance

Ordering Information (Note 5)

Device	Packaging	Shipping
1N4933-A	DO-41	5K/Ammo Pack
1N4933-B	DO-41	1K/Bulk
1N4933-T	DO-41	5K/Tape & Reel, 13-inch
1N4934-A	DO-41	5K/Ammo Pack
1N4934-B	DO-41	1K/Bulk
1N4934-T	DO-41	5K/Tape & Reel, 13-inch
1N4935-A	DO-41	5K/Ammo Pack
1N4935-B	DO-41	1K/Bulk
1N4935-T	DO-41	5K/Tape & Reel, 13-inch
1N4936-A	DO-41	5K/Ammo Pack
1N4936-B	DO-41	1K/Bulk
1N4936-T	DO-41	5K/Tape & Reel, 13-inch
1N4937-A	DO-41	5K/Ammo Pack
1N4937-B	DO-41	1K/Bulk
1N4937-T	DO-41	5K/Tape & Reel, 13-inch
1N4933L-T	A-405	5K/Tape & Reel, 13-inch
1N4934L-T	A-405	5K/Tape & Reel, 13-inch
1N4935L-T	A-405	5K/Tape & Reel, 13-inch
1N4936L-T	A-405	5K/Tape & Reel, 13-inch
1N4937L-T	A-405	5K/Tape & Reel, 13-inch

Notes: 5. For packaging details, visit our website at <http://www.diodes.com/datasheets/ap02008.pdf>



О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.





Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (XC), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

Перечень производителей, продукцию которых мы поставляем на российский рынок





Trade Electronics.ru

гарантия бесперебойности производства и
качества выпускаемой продукции

С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

<http://www.tradeelectronics.ru/>