

OKI Semiconductor

FEDSMS81V26000-02

Issue Date: Dec 15, 2004

MS81V26000

1,114,112-Word × 24-Bit Field Memory

GENERAL DESCRIPTION

The OKI MS81V26000 is a high performance 26-Mbit, 1,100K × 24-bit, Field Memory. It is especially designed for high-speed serial access applications such as HDTVs, conventional NTSC TVs, VTRs, digital movies and Multi-media systems. MS81V26000 is a FRAM for wide or low end use in general commodity TVs and VTRs exclusively. MS81V26000 is not designed for the other use or high end use in medical systems, professional graphics systems which require long term picture storage, data storage systems and others. More than two MS81V26000s can be cascaded directly without any delay devices among the MS81V26000s. (Cascading of MS81V26000 provides larger storage depth or a longer delay).

Each of the 24-bit planes has separate serial write and read ports. These employ independent control clocks to support asynchronous read and write operations. Different clock rates are also supported that allow alternate data rates between write and read data streams.

The MS81V26000 provides high speed FIFO, First-In First-Out, operation without external refreshing: MS81V26000 refreshes its DRAM storage cells automatically, so that it appears fully static to the users. Moreover, fully static type memory cells and decoders for serial access enable the refresh free serial access operation, so that serial read and/or write control clock can be halted high or low for any duration as long as the power is on. Internal conflicts of memory access and refreshing operations are prevented by special arbitration logic.

The MS81V26000's function is simple, and similar to a digital delay device whose delay-bit-length is easily set by reset timing. The delay length, number of read delay clocks between write and read, is determined by externally controlled write and read reset timings.

Additionally, the MS81V26000 has write mask function or input enable function (IE), and read-data skipping function or output enable function (OE). The differences between write enable (WE) and input enable (IE), and between read enable (RE) and output enable (OE) are that WE and RE can stop serial write/read address increments, but IE and OE cannot stop the increment, when write/read clocking is continuously applied to MS81V26000. The input enable (IE) function allows the user to write into selected locations of the memory only, leaving the rest of the memory contents unchanged. This facilitates data processing to display a "picture in picture" on a TV screen.


FEATURES

- Single power supply: 3.3 V $\pm$ 0.3 V
- 1,114,112 words $\times$ 24 bits
- Fast FIFO (First-In First-Out) operation
- High speed asynchronous serial access
 - Read/write cycle time 12 ns
 - Access time 9 ns
- Randomly accessible leading address
- Variable length delay bit (350 to 1,114,112)
- Write/Read start address settable
- Write mask function (Input enable control)
- Data skipping function (Output enable control)
- Self refresh (No refresh control is required)
- Package options:
 - 100-pin plastic TQFP (TQFP100-P-1414-0.50-K) (MS81V26000-xxTB)
 - xx indicates speed rank.

PRODUCT FAMILY

Family	Access Time (Max.)	Cycle Time (Min.)	Package
MS81V26000-12TB	9 ns	12 ns (83 MHz)	100-pin TQFP


PIN CONFIGURATION (TOP VIEW)

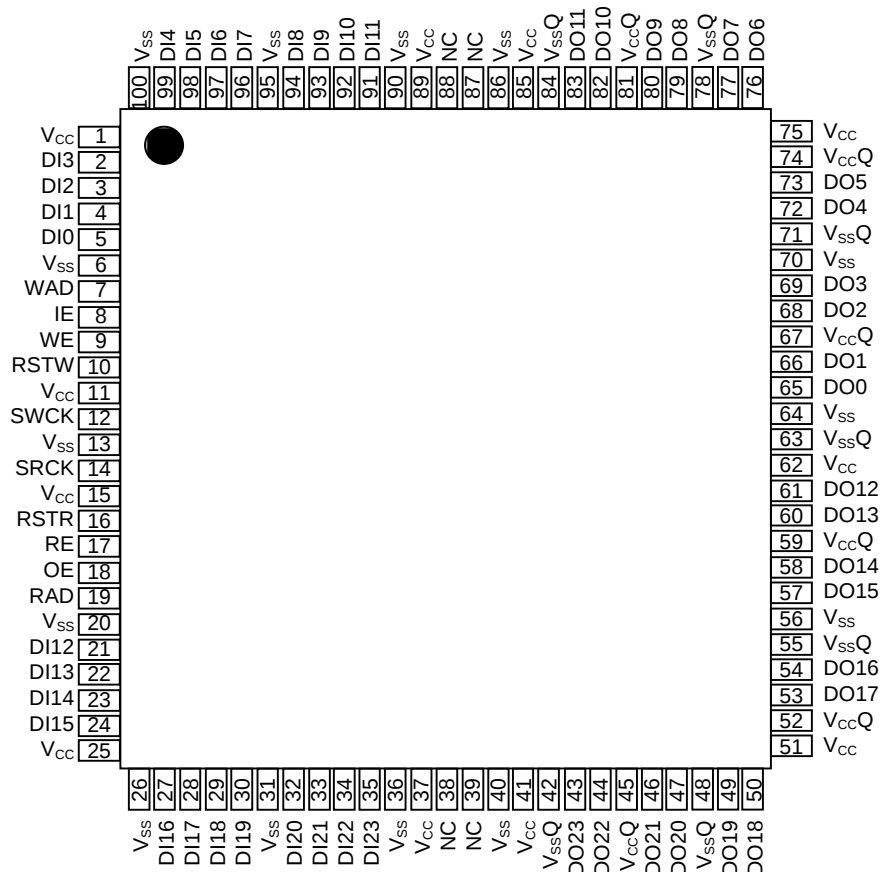

100-Pin TQFP

Pin Name	Function
SWCK	Serial Write Clock
SRCK	Serial Read Clock
WE	Write Enable
RE	Read Enable
IE	Input Enable
OE	Output Enable
RSTW	Write Reset Clock
RSTR	Read Reset Clock
WAD	Write Address Input
RAD	Read Address Input
D _{IN} 0 to 23	Data Input
D _{OUT} 0 to 23	Data Output
V _{CC}	Power Supply (3.3 V)
V _{SS}	Ground (0 V)
V _{CCQ}	Power Supply for output
V _{SSQ}	Ground for output
NC	No Connection

Note: The same power supply voltage must be provided to every V_{CC} pin and V_{CCQ} pin, and the same GND voltage level must be provided to every V_{SS} pin and V_{SSQ} pin.

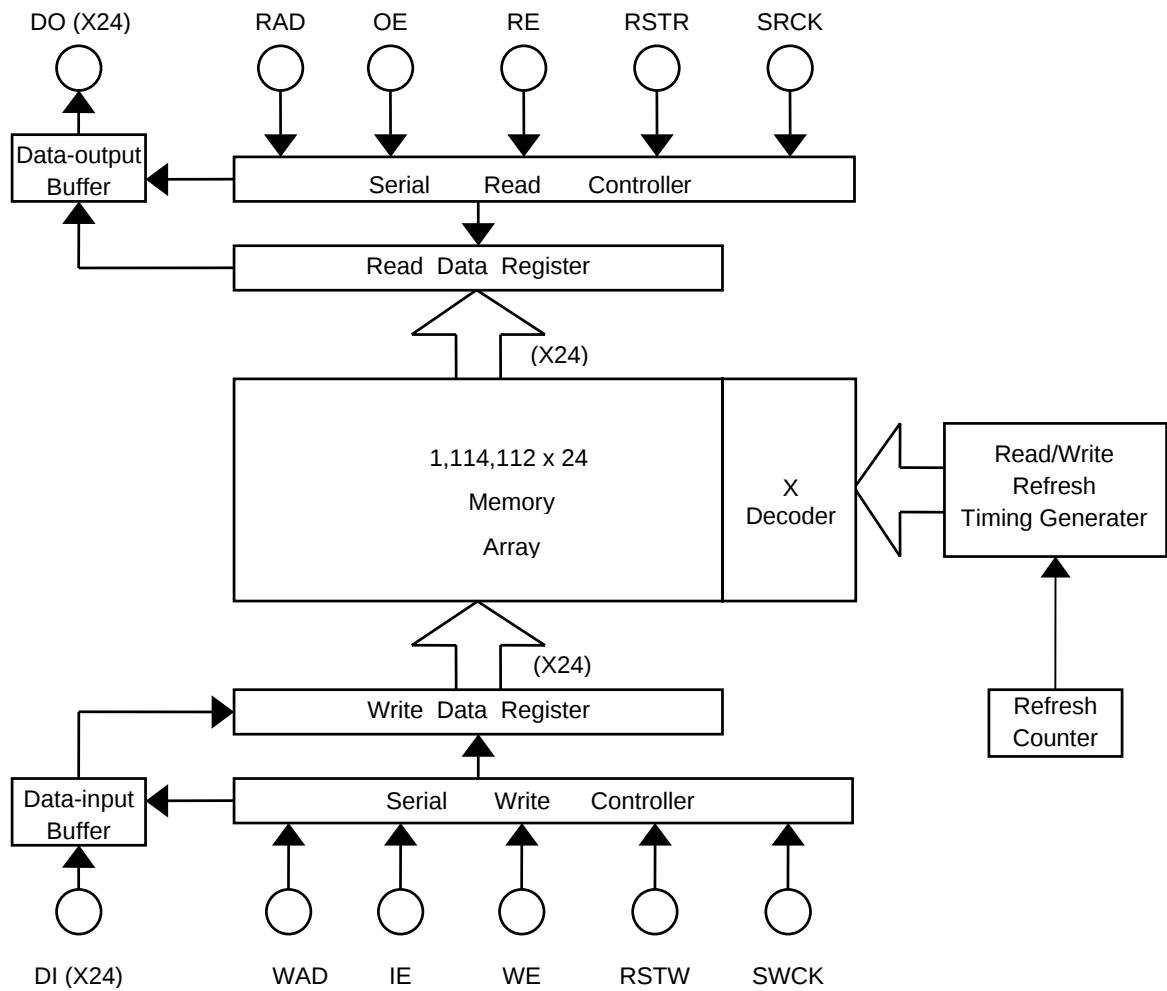BLOCK DIAGRAM

PIN DESCRIPTION

Serial Write Clock: SWCK

The SWCK latches the input data on chip when WE is high, and also increments the internal write address pointer. Data-in setup time tDS, and hold time tDH are referenced to the rising edge of SWCK.

Write Reset: RSTW

RSTW is used to set the internal write address pointer. RSTW setup and hold times are referenced to the rising edge of SWCK. The SWCK latches the write address data (21bits serial LSB) from WAD.

Write Enable: WE

WE is used for data write enable/disable control. WE high level enables the input, and WE low level disables the input and holds the internal write address pointer. There are no WE disable time (low) and WE enable time (high) restrictions, because the MS81V26000 is in fully static operation as long as the power is on. Note that WE setup and hold times are referenced to the rising edge of SWCK. The latency for the write operation control by WE is 4. After write reset, WE must remain low for more than 1600 ns (tFWD). After write reset, the write operation at address 0 is started after a time tWL from the cycle in which WE is brought high. After write reset, WE should be remained high for 2 cycles after driving WE high first.

Input Enable: IE

IE is used to enable/disable writing into memory. IE high level enables writing. The internal write address pointer is always incremented by cycling SWCK regardless of the IE level. Note that IE setup and hold times are referenced to the rising edge of SWCK. The latency for the write operation control by IE is 4.

Write Address Input: WAD

These pins are used for write address input.

Data Inputs: (DI0-23)

These pins are used for serial data inputs.

Write Reset: RSTW

RSTW is used to set the internal write address pointer. RSTW setup and hold times are referenced to the rising edge of SWCK. The SWCK latches the write address data (21bits serial LSB) from WAD.

Data Out: (DO0-23)

These pins are used for serial data outputs.

Serial Read Clock: SRCK

Data is shifted out of the data registers. It is triggered by the rising edge of SRCK when RE is high during a read operation. The SRCK input increments the internal read address pointer when RE is high. The three-state output buffer provides direct TTL compatibility (no pullup resistor required). Data out is the same polarity as data in. The output becomes valid after the access time interval tAC that begins with the rising edge of SRCK. *There are no output valid time restriction on MS81V26000.

Read Reset: RSTR

RSTR is used to set the internal read address pointer. RSTR setup and hold times are referenced to the rising edge of SRCK. The SWCK latches the read address data (21bits serial LSB) from RAD.

Read Enable: RE

The function of RE is to gate of the SRCK clock for incrementing the read pointer. When RE is high before the rising edge of SRCK, the read pointer is incremented. When RE is low, the read pointer is not incremented. RE setup times (tRENS and tRDSS) and RE hold times (tRENH and tRDSH) are referenced to the rising edge of the SRCK clock.

The latency for the read operation control by RE is 4. After read reset, RE must remain low for more than 1600 ns (tFRD). After read reset, the read data at address 0 is output after a time tRL from the cycle in which WE is brought high.

After read reset, RE should be remained high for 2 cycles after driving RE high first.

Output Enable: OE

OE is used to enable/disable the outputs. OE high level enables the outputs. The internal read address pointer is always incremented by cycling SRCK regardless of the OE level. Note that OE setup and hold times are referenced to the rising edge of SRCK. The latency for the read operation control by OE is 4.

Read Address Input: RAD

These pins are used for read address input.

ELECTRICAL CHARACTERISTICS

Absolute Maximum Ratings

Parameter	Symbol	Conditon	Rating	Unit
Power Supply Voltage	V_{CC}	$T_a = 25^{\circ}\text{C}$	-0.5 to +4.6	V
Input Output Voltage	V_T	at $T_a = 25^{\circ}\text{C}$, V_{SS}	-0.5 to +4.6	V
Output Current	I_{OS}	$T_a = 25^{\circ}\text{C}$	50	mA
Power Dissipation	P_D	$T_a = 25^{\circ}\text{C}$	1	W
Operating Temperature	T_{opr}	—	0 to 70	$^{\circ}\text{C}$
Storage Temperature	T_{stg}	—	-55 to +150	$^{\circ}\text{C}$

Recommended Operating Conditions

Parameter	Symbol	Min.	Typ	Max.	Unit
Power Supply Voltage	V_{CC}	3.0	3.3	3.6	V
Input High Voltage	V_{IH}	2.0	V_{CC}	$V_{CC} + 0.3$	V
Input Low Voltage	V_{IL}	-0.3	0	+0.8	V

DC Characteristics

Parameter	Symbol	Condition	Min.	Max.	Unit
Input Leakage Current	I_{LI}	$0 < V_I < V_{CC} + 0.3 \text{ V}$, Other Pins Tested at $V = 0 \text{ V}$	-10	+10	μA
Output Leakage Current	I_{LO}	$0 < V_O < V_{CC}$	-10	+10	μA
Output "H" Level Voltage	V_{OH}	$I_{OH} = -2 \text{ mA}$	2.4	—	V
Output "L" Level Voltage	V_{OL}	$I_{OL} = 2 \text{ mA}$	—	0.4	V
Operating Current	I_{CC1}	Minimum Cycle Time, Output Open	—	200	mA
Standby Current	I_{CC2}	Input Pin = V_{IH}/V_{IL}	—	5	mA

Capacitance

($V_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$, $T_a = 25^{\circ}\text{C}$, $f = 1 \text{ MHz}$)

Parameter	Symbol	Max.	Unit
Input Capacitance	C_I	6	pF
Output Capacitance	C_O	7	pF

AC Characteristics

(V_{CC} = 3.3 V ±0.3 V, T_a = 0 to 70°C)

Parameter	Symbol	MS81V26000-12		Unit
		Min.	Max.	
Access Time from SRCK	t _{AC}	—	9	ns
D _{OUT} Hold Time from SRCK	t _{DDCK}	3	—	ns
D _{OUT} Enable Time from SRCK	t _{DECK}	3	9	ns
SWCK "H" Pulse Width	t _{SWWH}	4	—	ns
SWCK "L" Pulse Width	t _{SWWL}	4	—	ns
Input Data Setup Time	t _{DS}	3	—	ns
Input Data Hold Time	t _{DH}	1	—	ns
WE Enable Setup Time	t _{WENS}	3	—	ns
WE Enable Hold Time	t _{WENH}	1	—	ns
WE Disable Setup Time	t _{WDSS}	3	—	ns
WE Disable Hold Time	t _{WDSH}	1	—	ns
IE Enable Setup Time	t _{IENS}	3	—	ns
IE Enable Hold Time	t _{IENH}	1	—	ns
IE Disable Setup Time	t _{IDSS}	3	—	ns
IE Disable Hold Time	t _{IDSH}	1	—	ns
WE "H" Pulse Width	t _{WEH}	4	—	ns
WE "L" Pulse Width	t _{WEWEL}	4	—	ns
IE "H" Pulse Width	t _{WIEH}	4	—	ns
IE "L" Pulse Width	t _{WIEL}	4	—	ns
RSTW Setup Time	t _{RSTWS}	3	—	ns
RSTW Hold Time	t _{RSTWH}	1	—	ns
SRCK "H" Pulse Width	t _{WSRH}	4	—	ns
SRCK "L" Pulse Width	t _{WSRL}	4	—	ns
RE Enable Setup Time	t _{RENS}	3	—	ns
RE Enable Hold Time	t _{RENH}	1	—	ns
RE Disable Setup Time	t _{RDSS}	3	—	ns
RE Disable Hold Time	t _{RDSH}	1	—	ns
OE Enable Setup Time	t _{OENS}	3	—	ns
OE Enable Hold Time	t _{OENH}	1	—	ns
OE Disable Setup Time	t _{ODSS}	3	—	ns
OE Disable Hold Time	t _{ODSH}	1	—	ns
RE "H" Pulse Width	t _{WREH}	4	—	ns
RE "L" Pulse Width	t _{WREL}	4	—	ns
OE "H" Pulse Width	t _{WOEH}	4	—	ns
OE "L" Pulse Width	t _{WOEL}	4	—	ns
RSTR Setup Time	t _{RSTRS}	3	—	ns
RSTR Hold Time	t _{RSTRH}	1	—	ns
SWCK Cycle Time	t _{SWC}	12	—	ns
SRCK Cycle Time	t _{SRC}	12	—	ns
Transition Time (Rise and Fall)	t _T	1	5	ns

Parameter	Symbol	MS81V26000-12		Unit
		Min.	Max.	
WE "L" Period before W Reset	t_{LWE}	4	—	clk
RE "L" Period before R Reset	t_{LRE}	4	—	clk
RE Delay after Reset	t_{FRD}	1,600	—	ns
WE Delay after Reset	t_{FWD}	1,600	—	ns
Write address input period	T_{WAE}	21	—	Clk
Read address input period	T_{RAE}	21	—	clk

Latency

Parameter	Symbol	MS81V26000-12	Unit
Write Latency	t_{WL}	4	clk
Read Latency	t_{RL}	4	clk
WE Write Control Latency	t_{WEL}	4	clk
IE Write Control Latency	t_{IEL}	4	clk
RE Read Control Latency	t_{REL}	4	clk
OE Read Control Latency	t_{OEL}	4	clk

AC Characteristic Measuring Conditions

Output Compare Level	1.4 V
Output Load	1 TTL + 30 pF
Input Signal Level	2.4 V/0.4 V
Input Signal Rise/Fall Time	1 ns
Input Signal Measuring Reference Level	1.4 V

Note: When transition time t_T becomes 1 ns or more, the input signal reference levels for the parameter measurement are V_{IH} (min.) and V_{IL} (max.).

OPERATION MODE

Write Operation Cycle

The write operation is controlled by four control signals, SWCK, RSTW, WE and IE. The write operation is accomplished by cycling SWCK, and holding WE high after the write address pointer reset operation or RSTW. RSTW must be performed for internal circuit initialization before write operation. WE must be low before and after the reset cycle ($t_{LWE} + t_{WAE} + t_{FWD}$).

Each write operation, which begins after RSTW must contain at least 231 active write cycles, i.e., SWCK cycles while WE and IE are high.

Settings of WE and IE to the operation mode of Write address pointer and Data input.

WE	IE	Internal Write address pointer	Data input (Latency 4)
H	H	Incremented	Input
H	L		Not input
L	X	Halted	

X indicates "don't care"

Read Operation Cycle

The read operation is controlled by four control signals, SRCK, RSTR, RE, and OE. The read operation is accomplished by cycling SRCK, and holding both RE and OE high after the read address pointer reset operation or RSTR.

Each read operation, which begins after RSTR, must contain at least 231 active read cycles, i.e., SRCK cycles while RE and OE are high. RE must be low before and after the reset cycle ($t_{LRE} + t_{RAE} + t_{FWD}$).

Settings of RE and OE to the operation mode of read address pointer and Data output.

RE	OE	Internal Read address pointer	Data output (Latency 4)
H	H	Incremented	Output
H	L		High impedance
L	H	Halted	Output
L	L		High impedance

Power-up and Initialization

To assure proper operation of this Memory, place an interval of at least 200 μ s after Vcc has stabilized to a value within the range of recommended operating conditions after power-up prior to the operation start. After this 200 μ s stabilization interval, the following initialization sequence must be performed. Because the read and write address pointers are undefined after power-up, a minimum of 150 dummy write operations (SWCK cycles) and read operations (SRCK cycles) must be performed, followed by an RSTW operation and an RSTR operation, to properly initialize the write and the read address pointer.

New Data Read Access


In order to read out “new data,” i.e., to read out data that has been written in a follow-up manner, read reset must be input after write address 150 and the difference between the read address and the write address must be 350 or more but 1,114,111 or less.

Old Data Read Access



In order to read out “old data,” i.e., to read out data that was written prior to the write operation being carried out, the difference between the read address and the write address must be 0 or more but 30 or less. If the difference between the read address and the write address is between 31 and 349 or 1,114,112 or more, it is unpredictable whether the new data is output or whether the old data is output. In this case, however, the write data will be written normally.

TIMING DIAGRAM


Write Cycle Timing (Write Reset)

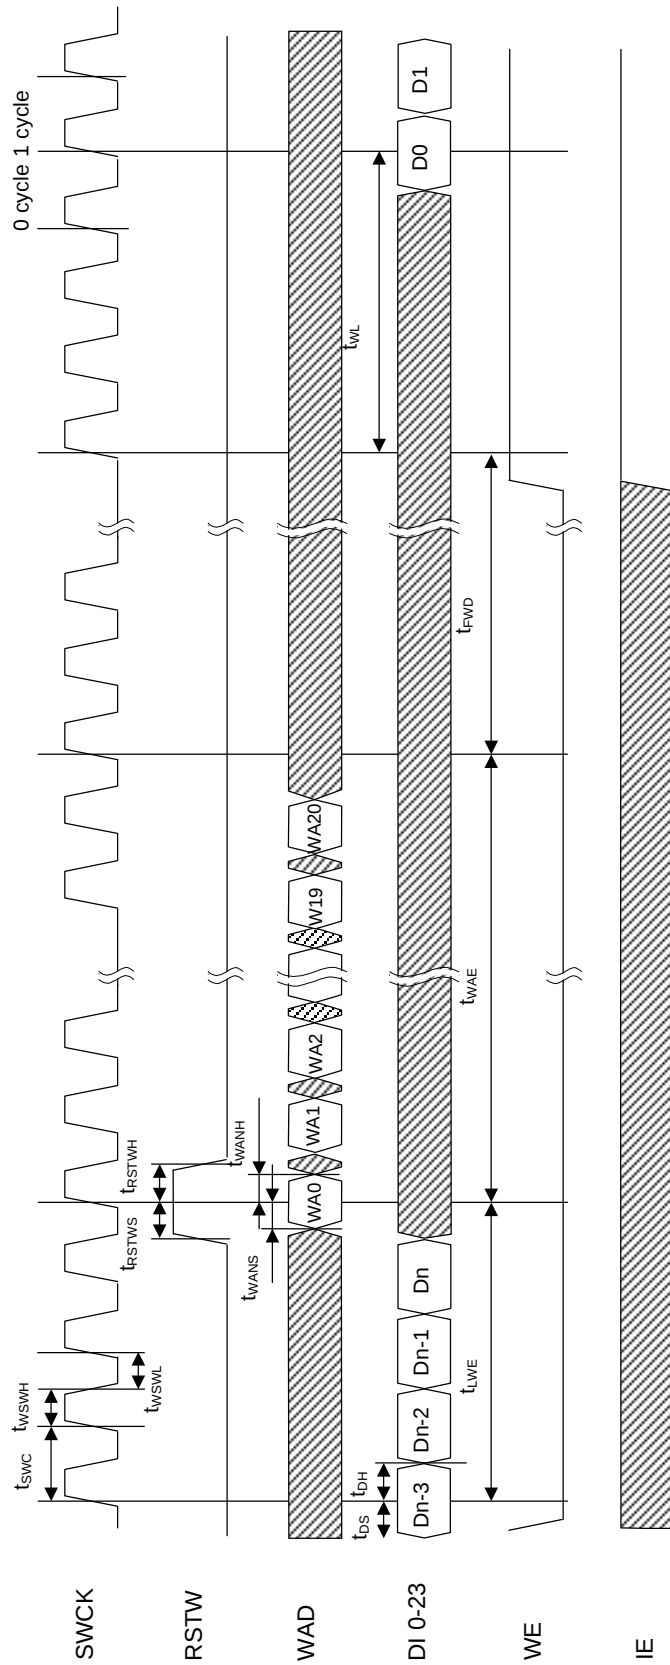



t_{WAE} ($\approx 21\text{clk}$): Period of Address input from Write Reset.
 After write reset, WE should be remained high for 2 cycles after driving WE high first.

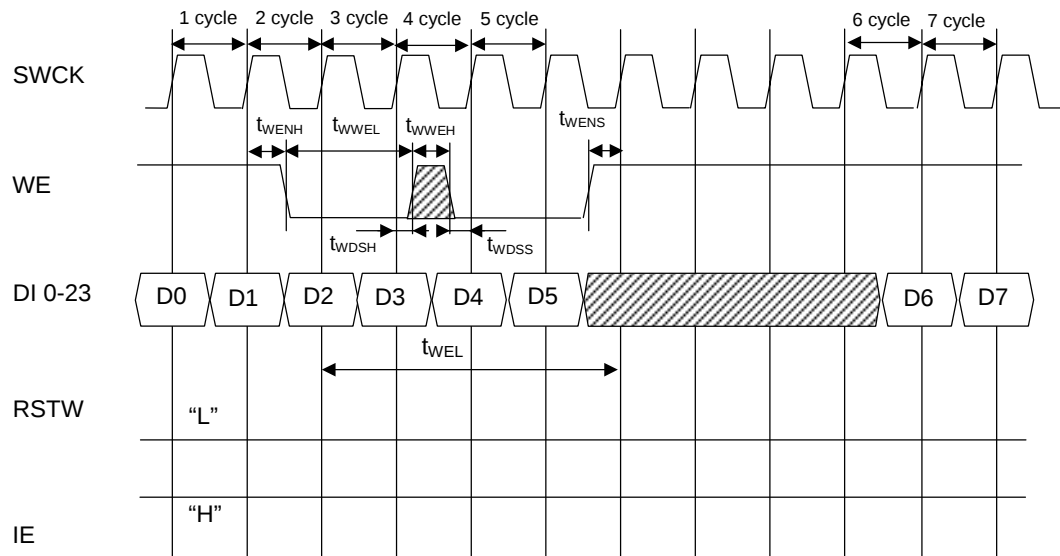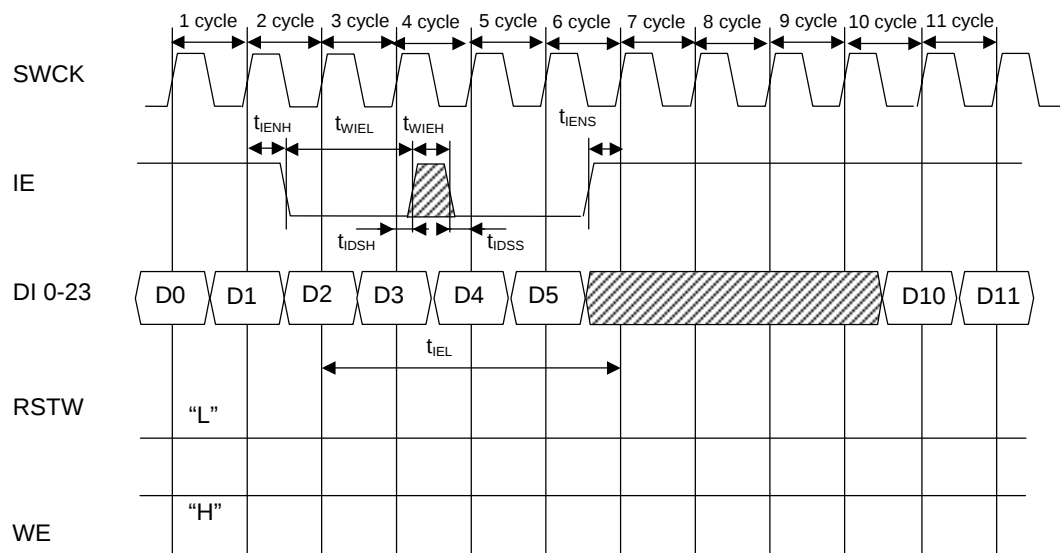Write Cycle Timing (Write Enable)**Write Cycle Timing (Input Enable)**


Read Cycle Timing (Read Reset)

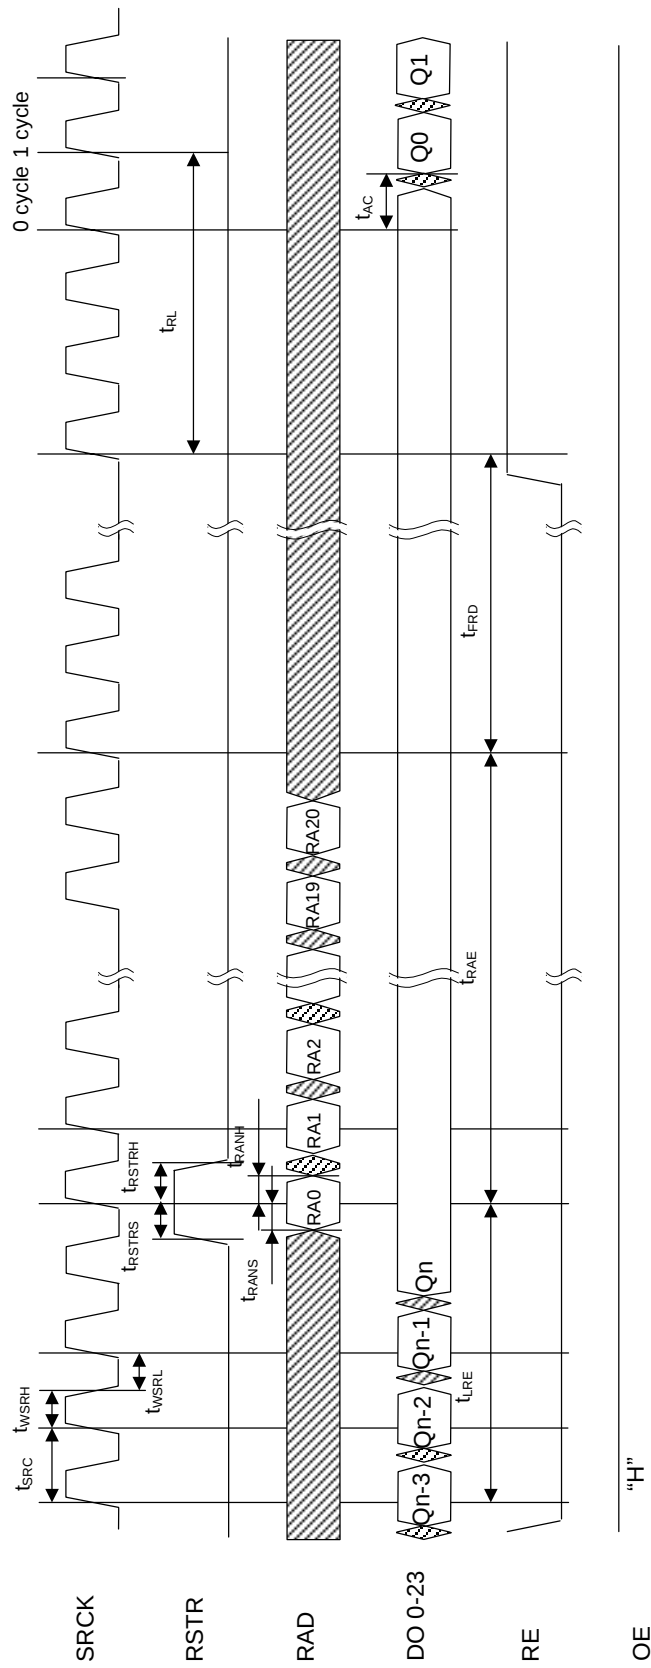

t_{RAE} (=21clk): Period of Address input from Read Reset.
 After read reset, RE should be remained high for 2 cycles after driving RE high first.

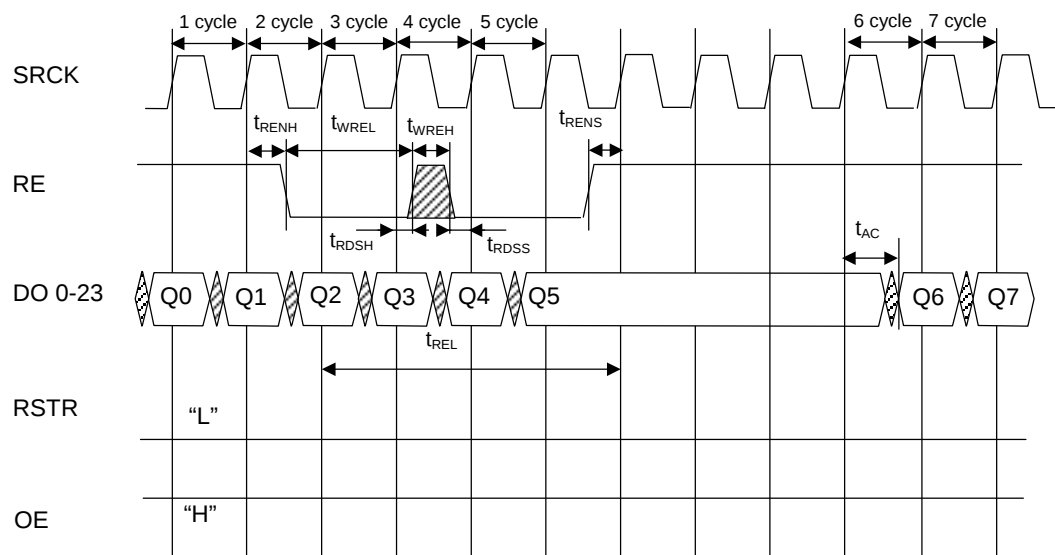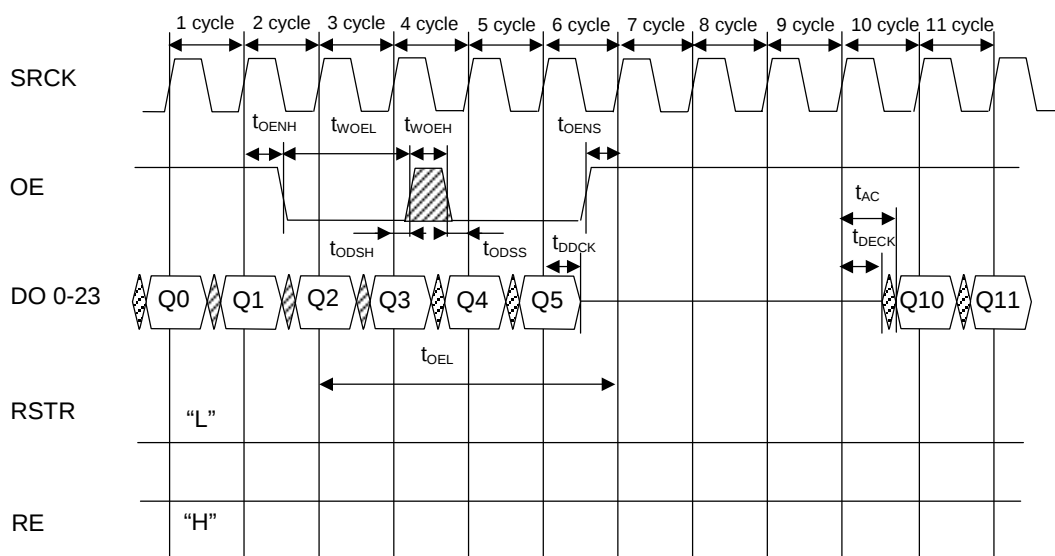
Read Cycle Timing (Read Enable)**Read Cycle Timing (Output Enable)**

Read / Write Cycle Timing (New Data Read)

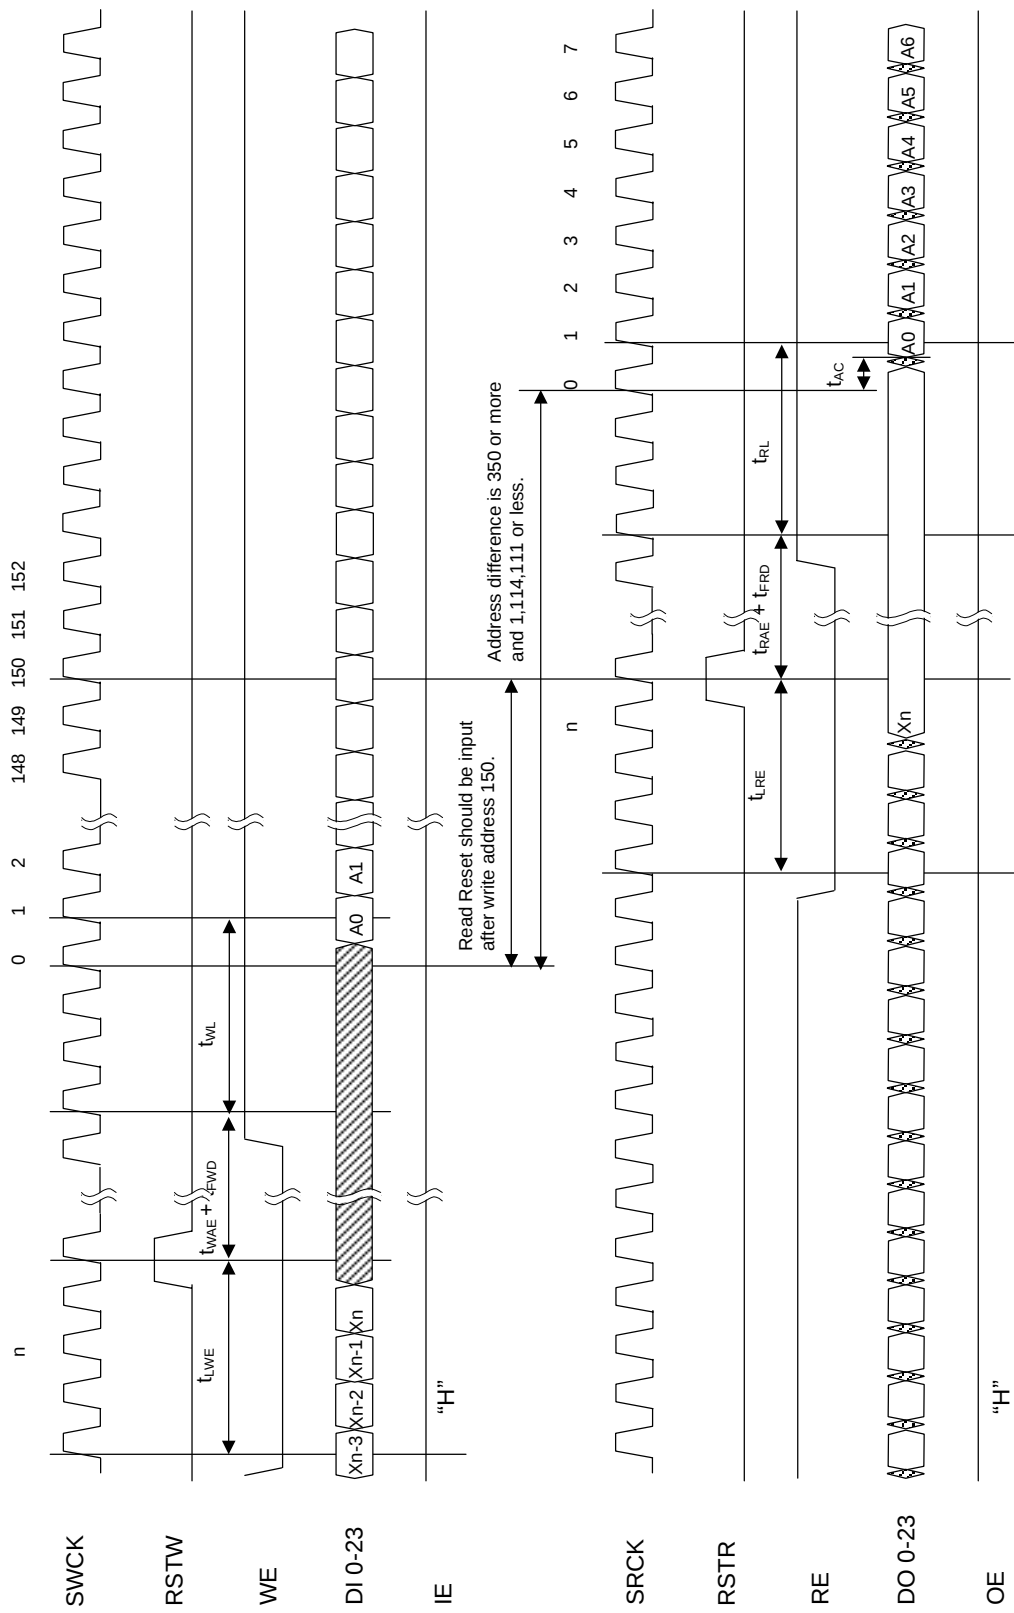

The setting address for reading and that for writing are the same.

Read / Write Cycle Timing (Old Data Read)

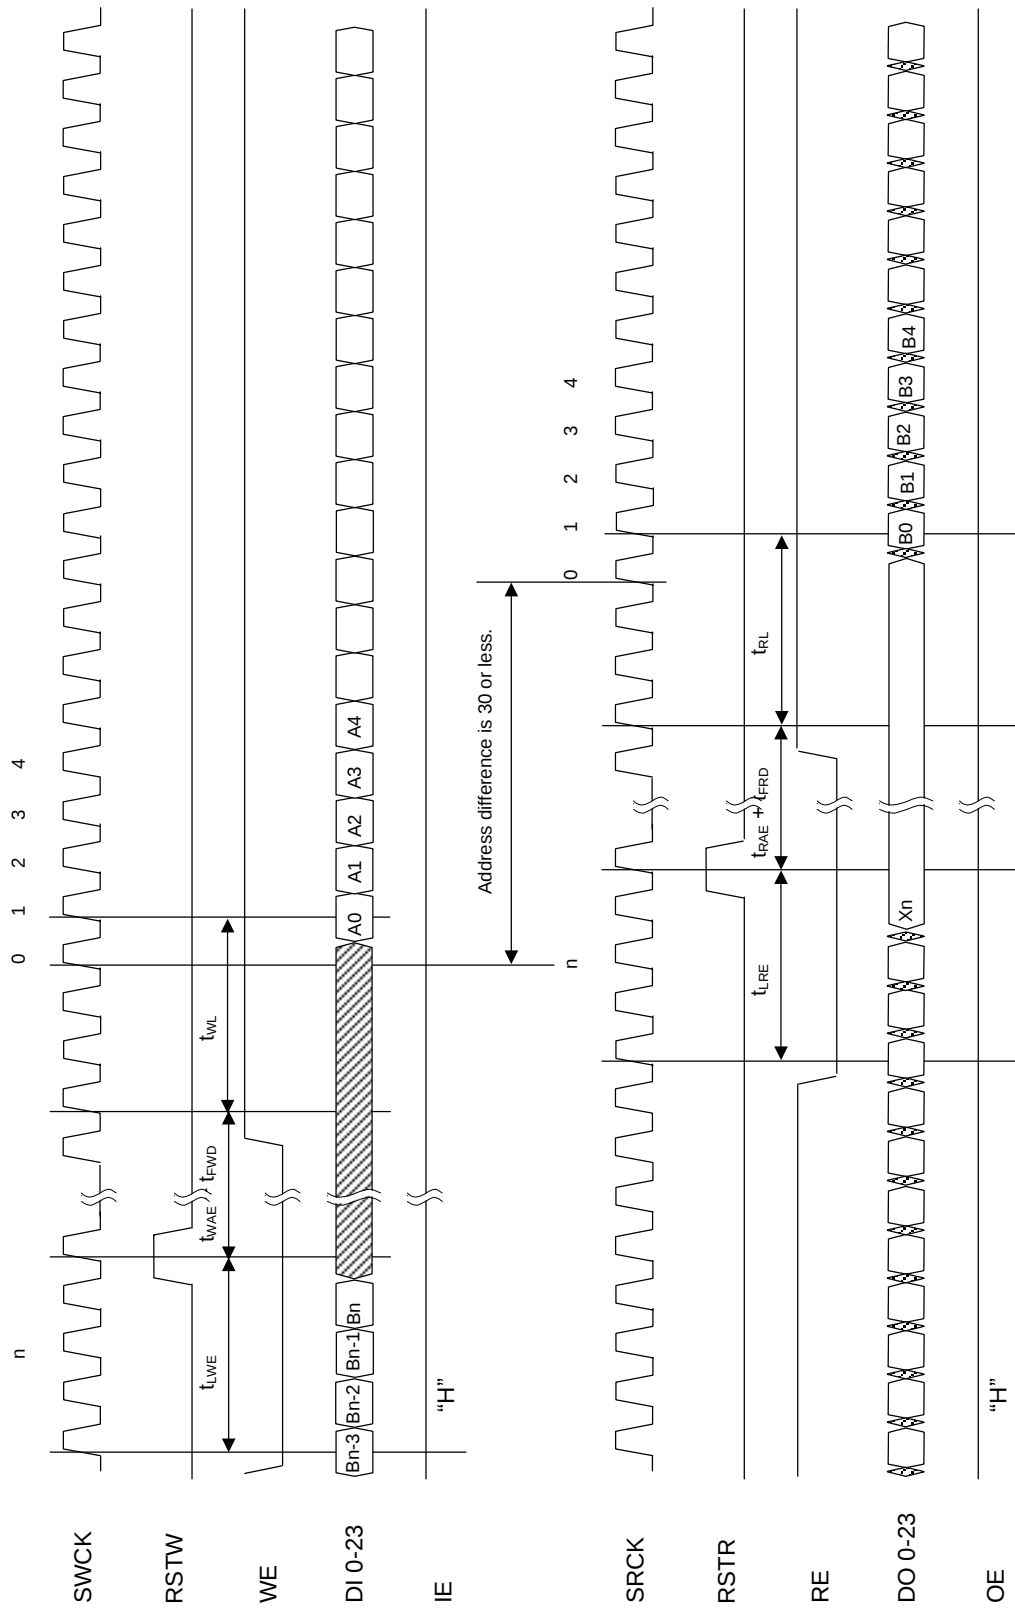

The setting address for reading and that for writing are the same.

REVISION HISTORY

Document No.	Date	Page		Description
		Previous Edition	Current Edition	
FEDS81V26000-01	May 14, 2004	—	—	Final edition 1
FEDS81V26000-01	Dec 15, 2004	20	20	P17 DI0-23 Xn→Bn

NOTICE

1. The information contained herein can change without notice owing to product and/or technical improvements. Before using the product, please make sure that the information being referred to is up-to-date.
2. The outline of action and examples for application circuits described herein have been chosen as an explanation for the standard action and performance of the product. When planning to use the product, please ensure that the external conditions are reflected in the actual circuit, assembly, and program designs.
3. When designing your product, please use our product below the specified maximum ratings and within the specified operating ranges including, but not limited to, operating voltage, power dissipation, and operating temperature.
4. Oki assumes no responsibility or liability whatsoever for any failure or unusual or unexpected operation resulting from misuse, neglect, improper installation, repair, alteration or accident, improper handling, or unusual physical or electrical stress including, but not limited to, exposure to parameters beyond the specified maximum ratings or operation outside the specified operating range.
5. Neither indemnity against nor license of a third party's industrial and intellectual property right, etc. is granted by us in connection with the use of the product and/or the information and drawings contained herein. No responsibility is assumed by us for any infringement of a third party's right which may result from the use thereof.
6. The products listed in this document are intended for use in general electronics equipment for commercial applications (e.g., office automation, communication equipment, measurement equipment, consumer electronics, etc.). These products are not, unless specifically authorized by Oki, authorized for use in any system or application that requires special or enhanced quality and reliability characteristics nor in any system or application where the failure of such system or application may result in the loss or damage of property, or death or injury to humans.
Such applications include, but are not limited to, traffic and automotive equipment, safety devices, aerospace equipment, nuclear power control, medical equipment, and life-support systems.
7. Certain products in this document may need government approval before they can be exported to particular countries. The purchaser assumes the responsibility of determining the legality of export of these products and will take appropriate and necessary steps at their own expense for these.
8. No part of the contents contained herein may be reprinted or reproduced without our prior permission.

Copyright 2004 Oki Electric Industry Co., Ltd.



О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.

Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (XC), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

Перечень производителей, продукцию которых мы поставляем на российский рынок





Trade Electronics.ru

гарантия бесперебойности производства и
качества выпускаемой продукции

С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

<http://www.tradeelectronics.ru/>