


## CMOS Bus Controller

The Intersil 82C88 is a high performance CMOS Bus Controller manufactured using a self-aligned silicon gate CMOS process (Scaled SAJI IV). The 82C88 provides the control and command timing signals for 80C86, 80C88, 8086, 8088, 8089, 80186, and 80188 based systems. The high output drive capability of the 82C88 eliminates the need for additional bus drivers.

Static CMOS circuit design insures low operating power. The Intersil advanced SAJI process results in performance equal to or greater than existing equivalent products at a significant power savings.

## Pinouts

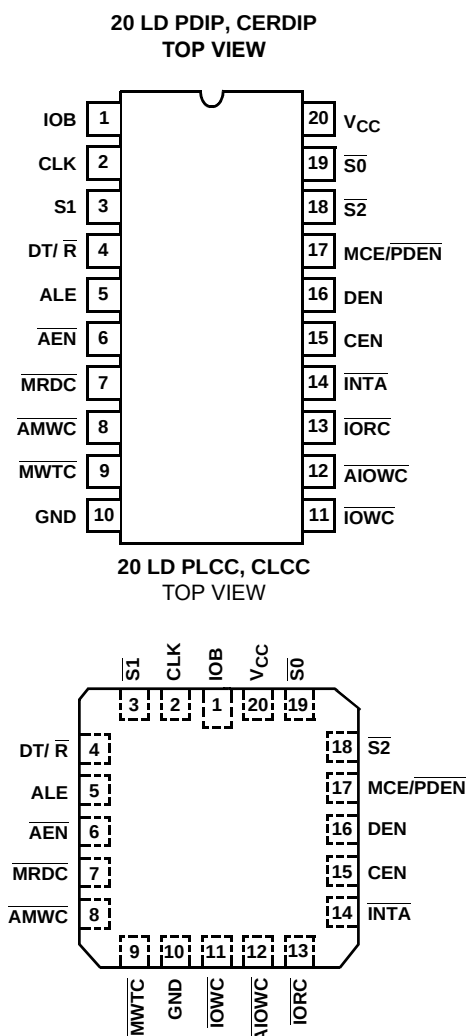

## Features


- Compatible with Bipolar 8288
- Performance Compatible with:
  - 80C86/80C88 . . . . . (5/8MHz)
  - 80186/80188 . . . . . (6/8MHz)
  - 8086/8088 . . . . . (5/8MHz)
  - 8089
- Provides Advanced Commands for Multi-Master Busses
- Three-State Command Outputs
- Bipolar Drive Capability
- Scaled SAJI IV CMOS Process
- Single 5V Power Supply
- Low Power Operation
  - ICCSB . . . . . 10μA (Max)
  - ICCOP . . . . . 1mA/MHz (Max)
- Operating Temperature Ranges
  - C82C88 . . . . . 0°C to +70°C
  - I82C88 . . . . . -40°C to +85°C
  - M82C88 . . . . . -55°C to +125°C
- Pb-Free Plus Anneal Available (RoHS Compliant)

## Ordering Information

| PART NUMBER     | PART MARKING | PACKAGE              | TEMP RANGE (°C) | PKG. DWG. # |
|-----------------|--------------|----------------------|-----------------|-------------|
| CP82C88         | CP82C88      | 20 Ld PDIP           | 0 to +70        | E20.3       |
| CP82C88Z (Note) | CP82C88Z     | 20 Ld PDIP (Pb-free) | 0 to +70        | E20.3       |
| CP82C88-10      | CP82C88-10   | 20 Ld PDIP           | 0 to +70        | E20.3       |
| IP82C88         | IP82C88      |                      | -40 to +85      | E20.3       |
| CS82C88         | CS82C88      | 20 Ld PLCC           | 0 to +70        | N20.35      |
| IS82C88         | IS82C88      |                      | -40 to +85      | N20.35      |
| CD82C88         | CD82C88      | 20 Ld CERDIP         | 0 to +70        | F20.3       |
| ID82C88         | ID82C88      |                      | -40 to +85      | F20.3       |
| MD82C88/B       | MD82C88/B    |                      | -55 to +125     | F20.3       |
| 8406901RA       | 8406901RA    | SMD#                 |                 | F20.3       |
| MR82C88/B       | MR82C88/B    | 20 Pad CLCC          | -55 to +125     | J20.A       |
| 84069012A       | 84069012A    | SMD#                 |                 | J20.A       |

NOTE: Intersil Pb-free plus anneal products employ special Pb-free material sets; molding compounds/die attach materials and 100% matte tin plate termination finish, which are RoHS compliant and compatible with both SnPb and Pb-free soldering operations. Intersil Pb-free products are MSL classified at Pb-free peak reflow temperatures that meet or exceed the Pb-free requirements of IPC/JEDEC J STD-020.

## Functional Diagram

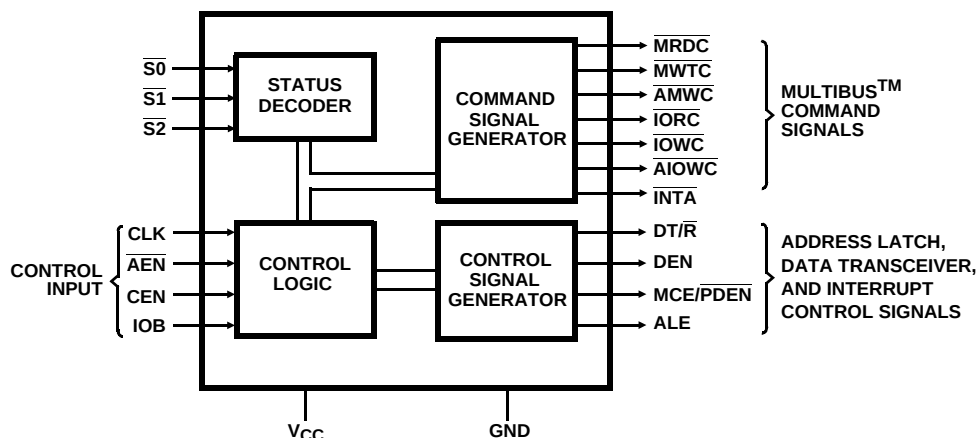

## Pin Description

| PIN SYMBOL                                       | NUMBER    | TYPE | DESCRIPTION                                                                                                                                                                                                                                                                                                                                             |
|--------------------------------------------------|-----------|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| V <sub>CC</sub>                                  | 20        |      | V <sub>CC</sub> : The +5V power supply pin. A 0.1μF capacitor between pins 10 and 20 is recommended for decoupling.                                                                                                                                                                                                                                     |
| GND                                              | 10        |      | GROUND.                                                                                                                                                                                                                                                                                                                                                 |
| S <sub>0</sub> , S <sub>1</sub> , S <sub>2</sub> | 19, 3, 18 | I    | STATUS INPUT PINS: These pins are the input pins from the 80C86, 80C88, 8086/88, 8089 processors. The 82C88 decodes these inputs to generate command and control signals at the appropriate time. When Status pins are not in use (passive), command outputs are held HIGH (See Table1).                                                                |
| CLK                                              | 2         | I    | CLOCK: This is a CMOS compatible input which receives a clock signal from the 82C84A or 82C85 clock generator and serves to establish when command/control signals are generated.                                                                                                                                                                       |
| ALE                                              | 5         | O    | ADDRESS LATCH ENABLE: This signal serves to strobe an address into the address latches. This signal is active HIGH and latching occurs on the falling (HIGH to LOW) transition. ALE is intended for use with transparent D type latches, such as the 82C82 and 82C83H.                                                                                  |
| DEN                                              | 16        | O    | DATA ENABLE: This signal serves to enable data transceivers onto either the local or system data bus. This signal is active HIGH.                                                                                                                                                                                                                       |
| DT/ $\overline{R}$                               | 4         | O    | DATA TRANSMIT/RECEIVE: This signal establishes the direction of data flow through the transceivers. A HIGH on this line indicates Transmit (write to I/O or memory) and a LOW indicates Receive (read from I/O or memory).                                                                                                                              |
| $\overline{AEN}$                                 | 6         | I    | ADDRESS ENABLE: $\overline{AEN}$ enables command outputs of the 82C88 Bus Controller a minimum of 110ns (250ns maximum) after it becomes active (LOW). $\overline{AEN}$ going inactive immediately three-states the command output drivers. $\overline{AEN}$ does not affect the I/O command lines if the 82C88 is in the I/O Bus mode (IOB tied HIGH). |
| CEN                                              | 15        | I    | COMMAND ENABLE: When this signal is LOW all 82C88 command outputs and the DEN and PDEN control outputs are forced to their Inactive state. When this signal is HIGH, these same outputs are enabled.                                                                                                                                                    |
| IOB                                              | 1         | I    | INPUT/OUTPUT BUS MODE: When the IOB pin is strapped HIGH, the 82C88 functions in the I/O Bus mode. When it is strapped LOW, the 82C88 functions in the System Bus mode (See I/O Bus and System Bus sections).                                                                                                                                           |
| $\overline{AIOWC}$                               | 12        | O    | ADVANCED I/O WRITE COMMAND: The $\overline{AIOWC}$ issues an I/O Write Command earlier in the machine cycle to give I/O devices an early indication of a write instruction. Its timing is the same as a read command signal. $\overline{AIOWC}$ is active LOW.                                                                                          |
| $\overline{IOWC}$                                | 11        | O    | I/O WRITE COMMAND: This command line instructs an I/O device to read the data on the data bus. The signal is active LOW.                                                                                                                                                                                                                                |
| $\overline{IORC}$                                | 13        | O    | I/O READ COMMAND: This command line instructs an I/O device to drive its data onto the data bus. This signal is active LOW.                                                                                                                                                                                                                             |

**Pin Description** (Continued)

| PIN SYMBOL                          | NUMBER | TYPE | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------------------------------|--------|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $\overline{\text{AMWC}}$            | 8      | O    | ADVANCED MEMORY WRITE COMMAND: The $\overline{\text{AMWC}}$ issues a memory write command earlier in the machine cycle to give memory devices an early indication of a write instruction. Its timing is the same as a read command signal. $\overline{\text{AMWC}}$ is active LOW.                                                                                                                                                                        |
| $\overline{\text{MWTC}}$            | 9      | O    | MEMORY WRITE COMMAND: This command line instructs the memory to record the data present on the data bus. This signal is active LOW.                                                                                                                                                                                                                                                                                                                       |
| $\overline{\text{MRDC}}$            | 7      | O    | MEMORY READ COMMAND: This command line instructs the memory to drive its data onto the data bus. $\overline{\text{MRDC}}$ is active LOW.                                                                                                                                                                                                                                                                                                                  |
| $\overline{\text{INTA}}$            | 14     | O    | INTERRUPT ACKNOWLEDGE: This command line tells an interrupting device that its interrupt has been acknowledged and that it should drive vectoring information onto the data bus. This signal is active LOW.                                                                                                                                                                                                                                               |
| $\text{MCE}/\overline{\text{PDEN}}$ | 17     | O    | This is a dual function pin. MCE (IOB IS TIED LOW) Master Cascade Enable occurs during an interrupt sequence and serves to read a Cascade Address from a master 82C59A Priority Interrupt Controller onto the data bus. The MCE signal is active HIGH. $\overline{\text{PDEN}}$ (IOB IS TIED HIGH): Peripheral Data Enable enables the data bus transceiver for the I/O bus that DEN performs for the system bus. $\overline{\text{PDEN}}$ is active LOW. |

**Functional Description**

The command logic decodes the three 80C86, 8086, 80C88, 8088, 80186, 80188 or 8089 status lines ( $\overline{\text{S0}}$ ,  $\overline{\text{S1}}$ ,  $\overline{\text{S2}}$ ) to determine what command is to be issued (see Table 1).

**TABLE 1. COMMAND DECODE DEFINITION**

| $\overline{\text{S2}}$ | $\overline{\text{S1}}$ | $\overline{\text{S0}}$ | PROCESSOR STATE       | 82C88 COMMAND                                        |
|------------------------|------------------------|------------------------|-----------------------|------------------------------------------------------|
| 0                      | 0                      | 0                      | Interrupt Acknowledge | $\overline{\text{INTA}}$                             |
| 0                      | 0                      | 1                      | Read I/O Port         | $\overline{\text{IORC}}$                             |
| 0                      | 1                      | 0                      | Write I/O Port        | $\overline{\text{IOWC}}$ , $\overline{\text{AIOWC}}$ |
| 0                      | 1                      | 1                      | Halt                  | None                                                 |
| 1                      | 0                      | 0                      | Code Access           | $\overline{\text{MRDC}}$                             |
| 1                      | 0                      | 1                      | Read Memory           | $\overline{\text{MRDC}}$                             |
| 1                      | 1                      | 0                      | Write Memory          | $\overline{\text{MWTC}}$ , $\overline{\text{AMWC}}$  |
| 1                      | 1                      | 1                      | Passive               | None                                                 |

**I/O Bus Mode**

The 82C88 is in the I/O Bus mode if the IOB pin is strapped HIGH. In the I/O Bus mode, all I/O command lines ( $\overline{\text{IORC}}$ ,  $\overline{\text{IOWC}}$ ,  $\overline{\text{AIOWC}}$ ,  $\overline{\text{INTA}}$ ) are always enabled (i.e., not dependent on  $\overline{\text{AEN}}$ ). When an I/O command is initiated by the processor, the 82C88 immediately activates the command lines using  $\overline{\text{PDEN}}$  and  $\text{DT}/\overline{\text{R}}$  to control the I/O bus transceiver. The I/O command lines should not be used to control the system bus in this configuration because no arbitration is present. This mode allows one 82C88 Bus Controller to handle two external busses. No waiting is involved when the CPU wants to gain access to the I/O bus. Normal memory access requires a "Bus Ready" signal ( $\overline{\text{AEN}}$  LOW) before it will proceed. It is advantageous to use the

IOB mode if I/O or peripherals dedicated to one processor exist in a multi-processor system.

**System Bus Mode**

The 82C88 is in the System Bus mode if the IOB pin is strapped LOW. In this mode, no command is issued until a specified time period after the  $\overline{\text{AEN}}$  line is activated (LOW). This mode assumes bus arbitration logic will inform the bus controller (on the  $\overline{\text{AEN}}$  line) when the bus is free for use. Both memory and I/O commands wait for bus arbitration. This mode is used when only one bus exists. Here, both I/O and memory are shared by more than one processor.

**Command Outputs**

The advanced write commands are made available to initiate write procedures early in the machine cycle. This signal can be used to prevent the processor from entering an unnecessary wait state.

$\overline{\text{INTA}}$  (Interrupt Acknowledge) acts as an I/O read during an interrupt cycle. Its purpose is to inform an interrupting device that its interrupt is being acknowledged and that it should place vectoring information onto the data bus.

The command outputs are:

$\overline{\text{MRDC}}$  - Memory Read Command

$\overline{\text{MWTC}}$  - Memory Write Command

$\overline{\text{IORC}}$  - I/O Read Command

$\overline{\text{IOWC}}$  - I/O Write Command

$\overline{\text{AMWC}}$  - Advanced Memory Write Command

$\overline{\text{AIOWC}}$  - Advanced I/O Write Command

$\overline{\text{INTA}}$  - Interrupt Acknowledge

**Control Outputs**

The control outputs of the 82C88 are Data Enable (DEN), Data Transmit/Receive ( $\overline{DT/R}$ ) and Master Cascade Enable/Peripheral Data Enable ( $\overline{MCE/PDEN}$ ). The DEN signal determines when the external bus should be enabled onto the local bus and the  $\overline{DT/R}$  determines the direction of data transfer. These two signals usually go to the chip select and direction pins of a transceiver.

The  $\overline{MCE/PDEN}$  pin changes function with the two modes of the 82C88. When the 82C88 is in the IOB mode (IOB HIGH), the  $\overline{PDEN}$  signal serves as a dedicated data enable signal for the I/O or Peripheral System bus.

**Interrupt Acknowledge and MCE**

The MCE signal is used during an interrupt acknowledge cycle if the 82C88 is in the System Bus mode (IOB LOW). During any interrupt sequence, there are two interrupt acknowledge cycles that occur back to back. During the first interrupt cycle no data or address transfers take place. Logic should be provided to mask off MCE during this cycle. Just before the second cycle begins the MCE signal gates a master Priority Interrupt Controller's (PIC) cascade address onto the processor's local bus where ALE (Address Latch Enable) strobes it into the address latches. On the leading edge of the second interrupt cycle, the addressed slave PIC gates an interrupt vector onto the system data bus where it is read by the processor.

If the system contains only one PIC, the MCE signal is not used. In this case, the second Interrupt Acknowledge signal gates the interrupt vector onto the processor bus.

**Address Latch Enable and Halt**

Address Latch Enable (ALE) occurs during each machine cycle and serves to strobe the current address into the 82C82/82C83H address latches. ALE also serves to strobe the status ( $\overline{S0}$ ,  $\overline{S1}$ ,  $\overline{S2}$ ) into a latch for halt state decoding.

**Command Enable**

The Command Enable (CEN) input acts as a command qualifier for the 82C88. If the CEN pin is high, the 82C88 functions normally. If the CEN pin is pulled LOW, all command lines are held in their inactive state (not three-state). This feature can be used to implement memory partitioning and to eliminate address conflicts between system bus devices and resident bus devices.

**Absolute Maximum Ratings**

Supply Voltage..... +8.0V  
 Input, Output or I/O Voltage..... GND -0.5V to  $V_{CC} + 0.5V$   
 ESD Classification..... Class 1

**Operating Conditions**

Operating Voltage Range ..... +4.5V to +5.5V  
 Operating Temperature Range  
   C82C88 ..... 0°C to +70°C  
   I82C88 ..... -40°C to +85°C  
   M82C88 ..... -55°C to +125°C

**Thermal Information**

|                              |                      |                      |
|------------------------------|----------------------|----------------------|
| Thermal Resistance (Typical) | $\theta_{JA}$ (°C/W) | $\theta_{JC}$ (°C/W) |
| CERDIP Package.....          | 75                   | 18                   |
| CLCC Package.....            | 85                   | 22                   |
| PDIP Package.....            | 75                   | N/A                  |
| PLCC Package.....            | 75                   | N/A                  |

Storage Temperature Range..... -65°C to +150°C  
 Maximum Junction Temperature  
   Ceramic Package..... +175°C  
   Plastic Package..... +150°C  
 Maximum Lead Temperature (Soldering 10s)..... +300°C  
 (PLCC - Lead Tips Only)

**Die Characteristics**

Gate Count ..... 100 Gates

*CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.*

**DC Electrical Specifications**

$V_{CC} = 5.0V \pm 10\%$ ;  
 $T_A = 0^\circ C$  to  $+70^\circ C$  (C82C88);  
 $T_A = -40^\circ C$  to  $+85^\circ C$  (I82C88);  
 $T_A = -55^\circ C$  to  $+125^\circ C$  (M82C88)

| SYMBOL    | PARAMETER                              | MIN                   | MAX    | UNITS   | TEST CONDITIONS                                                                                                  |
|-----------|----------------------------------------|-----------------------|--------|---------|------------------------------------------------------------------------------------------------------------------|
| $V_{IH}$  | Logical One Input Voltage              | 2.0<br>2.2            | -<br>- | V<br>V  | C82C88, I82C88<br>M82C88                                                                                         |
| $V_{IL}$  | Logical Zero Input Voltage             | -                     | 0.8    | V       |                                                                                                                  |
| $V_{IHC}$ | CLK Logical One Input Voltage          | $V_{CC} - 0.8$        | -      | V       |                                                                                                                  |
| $V_{ILC}$ | CLK Logical Zero Input Voltage         | -                     | 0.8    | V       |                                                                                                                  |
| $V_{OH}$  | Output High Voltage<br>Command Outputs | 3.0<br>$V_{CC} - 0.4$ | -      | V<br>V  | $I_{OH} = -8.0mA$<br>$I_{OH} = -2.5mA$                                                                           |
|           | Output High Voltage<br>Control Outputs | 3.0<br>$V_{CC} - 0.4$ | -      | V<br>V  | $I_{OH} = -4.0mA$<br>$I_{OH} = -2.5mA$                                                                           |
| $V_{OL}$  | Output Low Voltage<br>Command Outputs  | -                     | 0.5    | V       | $I_{OL} = +12.0mA$                                                                                               |
|           | Output Low Voltage<br>Control Outputs  | -                     | 0.4    | V       | $I_{OL} = +8.0mA$                                                                                                |
| $I_I$     | Input Leakage Current                  | -1.0                  | 1.0    | $\mu A$ | $V_{IN} = GND$ or $V_{CC}$ , except $\overline{S0}$ , $\overline{S1}$ , $\overline{S2}$ ,<br>DIP Pins 1-2, 6, 15 |
| IBHH      | Input Leakage Current-Status Bus       | -50                   | -300   | $\mu A$ | $V_{IN} = 2.0V$ , $\overline{S0}$ , $\overline{S1}$ , $\overline{S2}$ (See Note 1)                               |
| IO        | Output Leakage Current                 | -10.0                 | 10.0   | $\mu A$ | $V_O = GND$ or $V_{CC}$ , IOB = GND, $\overline{AEN} = V_{CC}$ ,<br>DIP Pins 7-9, 11-14                          |
| ICCSB     | Standby Power Supply                   | -                     | 10     | $\mu A$ | $V_{CC} = 5.5V$ , $V_{IN} = V_{CC}$ or GND, Outputs Open                                                         |
| ICCOP     | Operating Power Supply Current         | -                     | 1      | mA/MHz  | $V_{CC} = 5.5V$ , Outputs Open (See Note 2)                                                                      |

**NOTES:**

1. IBHH should be measured after raising the  $V_{IN}$  on  $\overline{S0}$ ,  $\overline{S1}$ ,  $\overline{S2}$  to  $V_{CC}$  and then lowering to valid input high level of 2.0V.
2. ICCOP = 1mA/MHz of CLK cycle time (TCLCL)

**Capacitance**  $T_A = +25^\circ C$ 

| SYMBOL | PARAMETER          | TYPICAL | UNITS | TEST CONDITIONS                                            |
|--------|--------------------|---------|-------|------------------------------------------------------------|
| CIN    | Input Capacitance  | 10      | pF    | FREQ = 1MHz, all measurements are referenced to device GND |
| COUT   | Output Capacitance | 17      | pF    |                                                            |


**AC Electrical Specifications**  $V_{CC} = 5.0V \pm 10\%$ ;  
 $T_A = 0^\circ C$  to  $+70^\circ C$  (C82C88);  
 $T_A = -40^\circ C$  to  $+85^\circ C$  (I82C88);  
 $T_A = -55^\circ C$  to  $+125^\circ C$  (M82C88)

| SYMBOL              | PARAMETER                        | 8MHz       |           | 10MHz      |       | 12MHz      |       | UNITS | TEST CONDITIONS |
|---------------------|----------------------------------|------------|-----------|------------|-------|------------|-------|-------|-----------------|
|                     |                                  | MIN        | MAX       | MIN        | MAX   | MIN        | MAX   |       |                 |
| TIMING REQUIREMENTS |                                  |            |           |            |       |            |       |       |                 |
| (1) TCLCL           | CLK Cycle Period                 | 125        | -         | 100        | -     | 83         | -     | ns    |                 |
| (2) TCLCH           | CLK Low Time                     | 55         | -         | 50         | -     | 34         | -     | ns    |                 |
| (3) TCHCL           | CLK High Time                    | 40         | -         | 37         | -     | 34         | -     | ns    |                 |
| (4) TSVCH           | Status Active Setup Time         | 35         | -         | 35         | -     | 35         | -     | ns    |                 |
| (5) TCHSV           | Status Inactive Hold Time        | 10         | -         | 10         | -     | 5          | -     | ns    |                 |
| (6) TSHCL           | Status Inactive Setup Time       | 35         | -         | 35         | -     | 35         | -     | ns    |                 |
| (7) TCLSH           | Status Active Hold Time          | 10         | -         | 10         | -     | 5          | -     | ns    |                 |
| TIMING RESPONSES    |                                  |            |           |            |       |            |       |       |                 |
| (8) TCVNV           | Control Active Delay             | 5          | 45        | 5          | 45    | 5          | 45    | ns    | 1               |
| (9) TCVNX           | Control Inactive Delay           | 10         | 45        | 10         | 45    | 10         | 35    | ns    | 1               |
| (10) TCLLH          | ALE Active Delay (from CLK)      | -          | 20        | -          | 20    | -          | 20    | ns    | 1               |
| (11) TCLMCH         | MCE Active Delay (from CLK)      | -          | 25        | -          | 23    | -          | 23    | ns    | 1               |
| (12) TSVLH          | ALE Active Delay (from Status)   | -          | 20        | -          | 20    | -          | 20    | ns    | 1               |
| (13) TSVMCH         | MCE Active Delay (from Status)   | -          | 30        | -          | 23    | -          | 23    | ns    | 1               |
| (14) TCHLL          | ALE Inactive Delay               | 4          | 18        | 4          | 18    | 4          | 18    | ns    | 1               |
| (15) TCLML          | Command Active Delay             | 5          | 35        | 5          | 35    | 5          | 35    | ns    | 2               |
| (16) TCLMH          | Command Inactive Delay           | 5          | 35        | 5          | 35    | 5          | 35    | ns    | 2               |
| (17) TCHDTL         | Direction Control Active Delay   | -          | 50        | -          | 50    | -          | 50    | ns    | 1               |
| (18) TCHDTH         | Direction Control Inactive Delay | -          | 30        | -          | 30    | -          | 30    | ns    | 1               |
| (19) TAECH          | Command Enable Time (Note 1)     | -          | 40        | -          | 40    | -          | 40    | ns    | 3               |
| (20) TAEHCZ         | Command Disable Time (Note 2)    | -          | 40        | -          | 40    | -          | 40    | ns    | 4               |
| (21) TAELCV         | Enable Delay Time                | 110        | 250       | 110        | 250   | 110        | 250   | ns    | 2               |
| (22) TAEVNV         | $\overline{AEN}$ to DEN          | -          | 25        | -          | 25    | -          | 25    | ns    | 1               |
| (23) TCEVNV         | CEN to DEN, $\overline{PDEN}$    | -          | 25        | -          | 25    | -          | 25    | ns    | 1               |
| (24) TCELRH         | CEN to Command                   | -          | TCLML +10 | -          | TCLML | -          | TCLML | ns    | 2               |
| (25) TLHLL          | ALE High Time                    | TCLCH - 10 | -         | TCLCH - 10 | -     | TCLCH - 10 | n     | ns    | 1               |

## NOTES:


1. TAECH measurement is between 1.5V and 2.5V.
2. TAEHCZ measured at 0.5V change in VOUT.

## AC Testing Input, Output Waveform

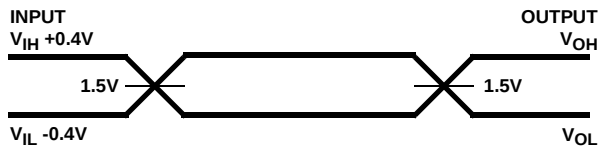

A.C. Testing: All input signals (other than CLK) must switch between  $V_{IL} -0.4V$  and  $V_{IH} +0.4$ . CLK must switch between 0.4V and  $V_{CC} -0.4V$ . Input rise and fall times are driven at 1ns/V.

## A.C. Test Circuit

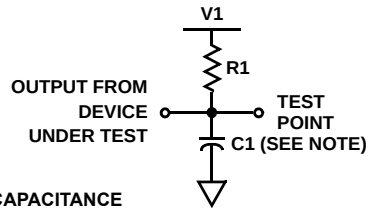


NOTE:  
INCLUDES STRAY AND JIG CAPACITANCE

TABLE 2. TEST CONDITION DEFINITION TABLE

| TEST CONDITION | V1    | R1   | C1    |
|----------------|-------|------|-------|
| 1              | 2.13V | 220Ω | 80pF  |
| 2              | 2.29V | 91Ω  | 300pF |
| 3              | 1.5V  | 187Ω | 300pF |
| 4              | 1.5V  | 187Ω | 50pF  |



# Timing Waveforms (Note 3)

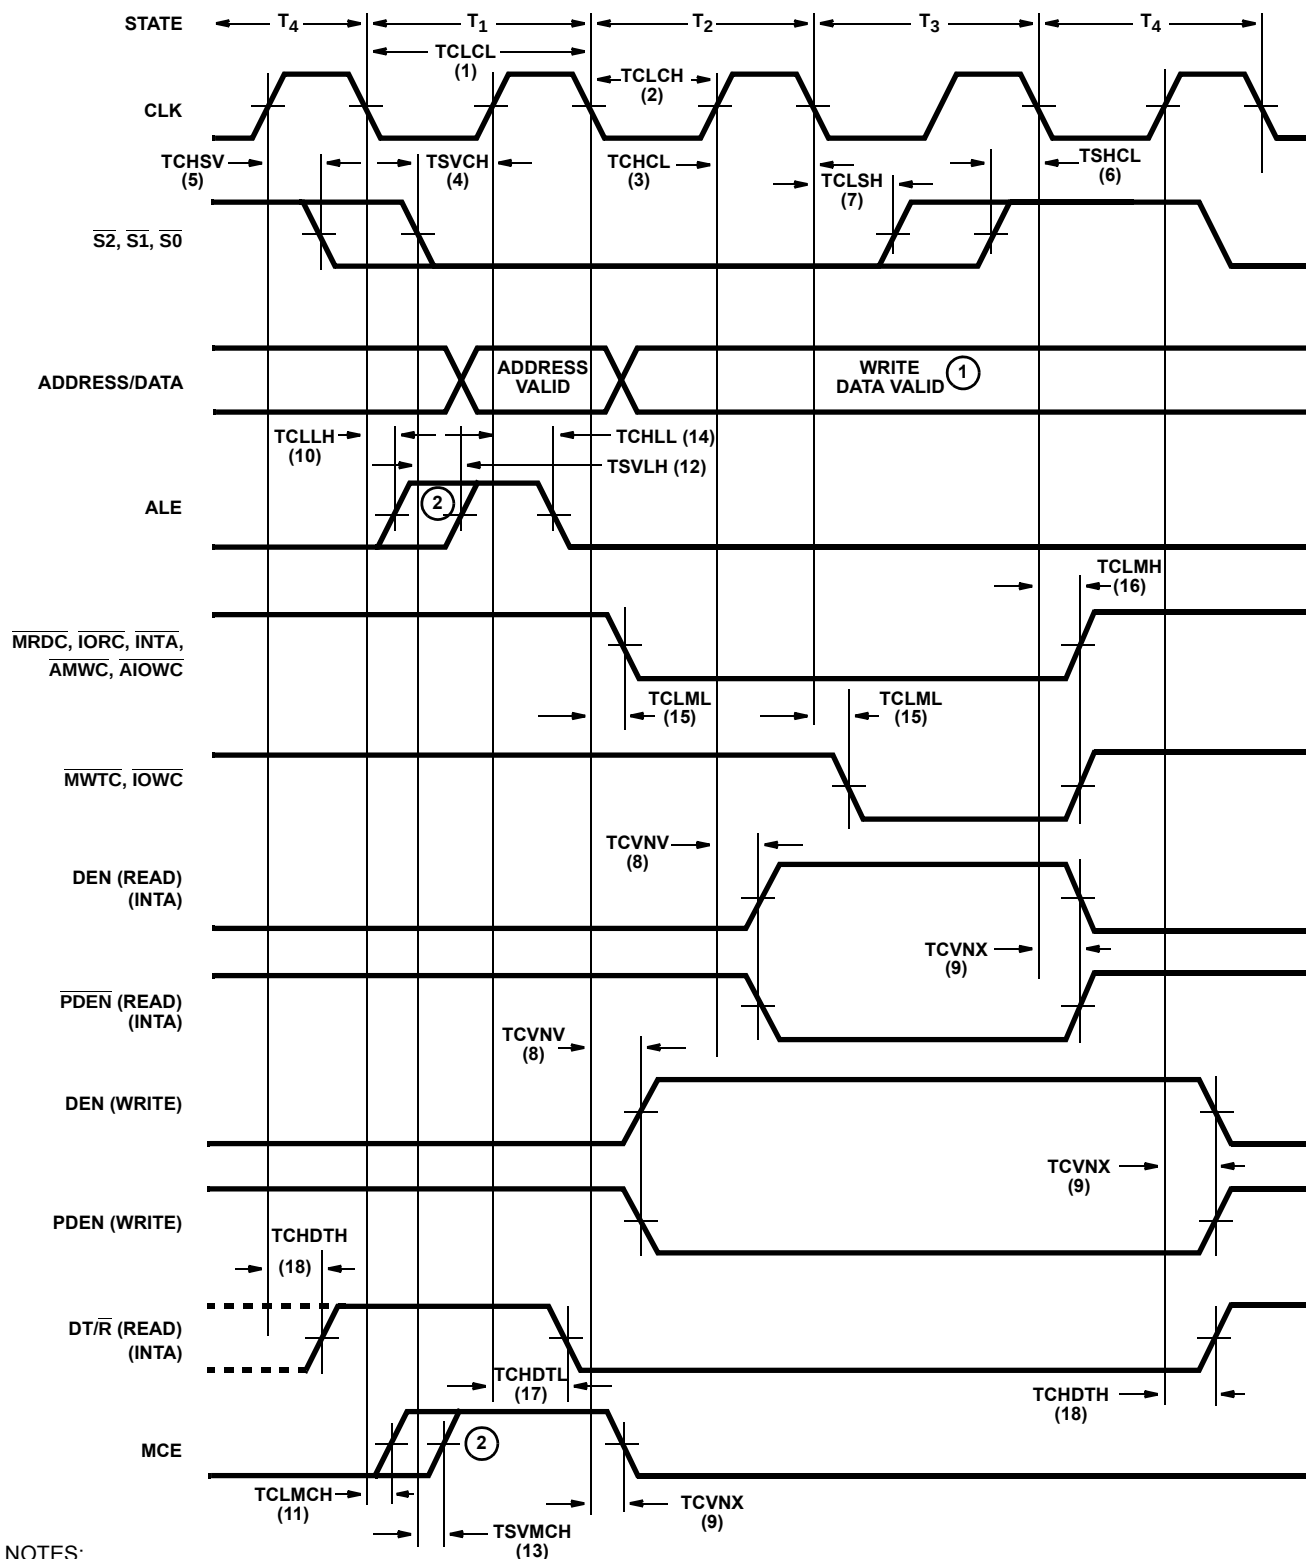

## NOTES:

1. Address/Data Bus is shown only for reference purposes.
2. Leading edge of ALE and MCE is determined by the falling edge of CLK or status going active. Whichever occurs last.
3. All timing measurements are made at 1.5V unless otherwise specified.

FIGURE 1.

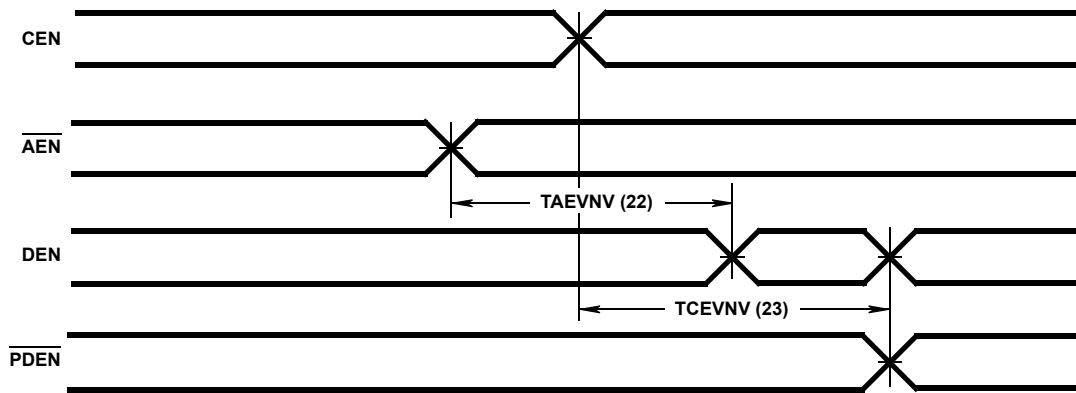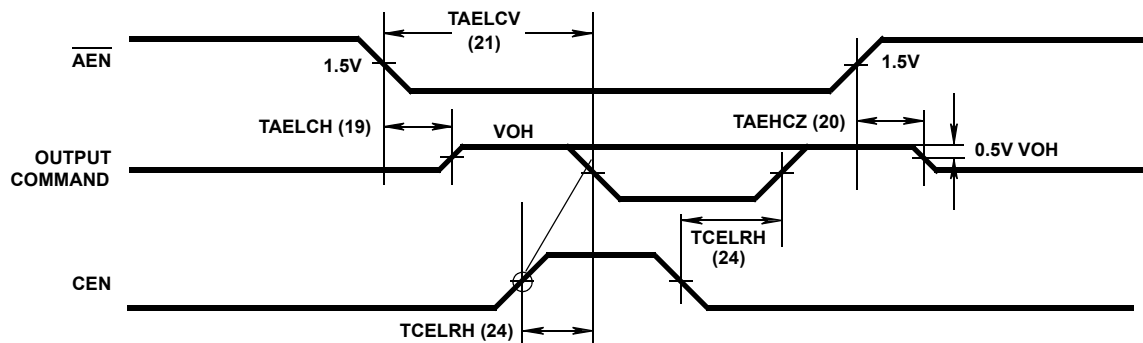**Timing Waveforms** (Note 3) (Continued)FIGURE 2. DEN,  $\overline{\text{PDEN}}$  QUALIFICATION TIMING

CEN MUST BE LOW OR INVALID PRIOR TO T2 TO PREVENT THE COMMAND FROM BEING GENERATED.


FIGURE 3. ADDRESS ENABLE ( $\overline{\text{AEN}}$ ) TIMING (THREE-STATE ENABLE/DISABLE)

## NOTES:


1. Address/Data Bus is shown only for reference purposes.
2. Leading edge of ALE and MCE is determined by the falling edge of CLK or status going active. Whichever occurs last.
3. All timing measurements are made at 1.5V unless otherwise specified.

## Burn-In Circuits

MD82C88 Cerdip

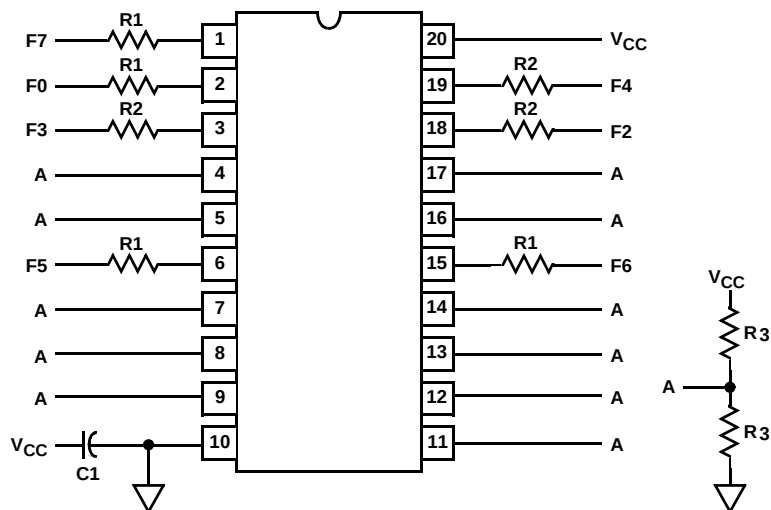

MR82C88 CLCC

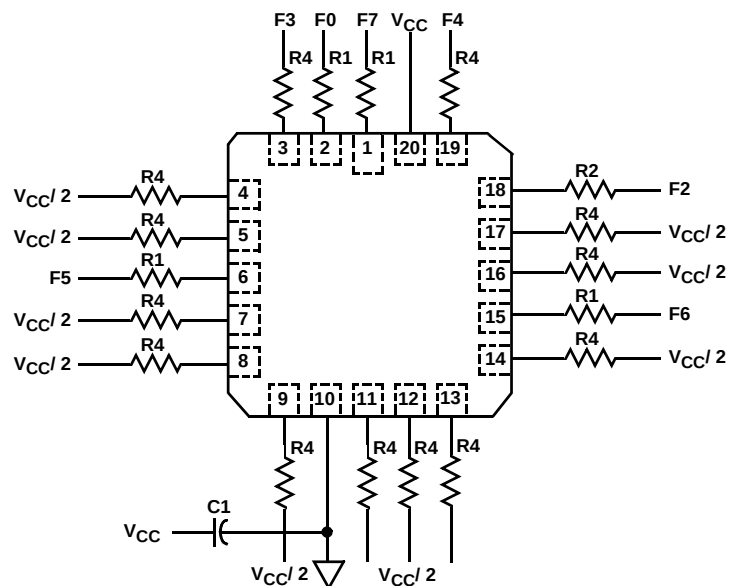

## NOTES:

1.  $V_{CC} = 5.5V \pm 0.5V$   
GND = 0V
2.  $V_{IH} = 4.5V \pm 10\%$   
 $V_{IL} = -0.2V$  to  $+0.4V$
3. Component Values:  
 $R1 = 47k\Omega$ , 1/4W, 5%  
 $R2 = 1.5k\Omega$ , 1/4W, 5%  
 $R3 = 10k\Omega$ , 1/4W, 5%  
 $R4 = 1.2k\Omega$ , 1/4W, 5%  
 $C1 = 0.01\mu F$  (Min)  
 $F0 = 100kHz \pm 10\%$   
 $F1 = F0/2$   
 $F2 = F1/2 \dots F7 = F6/2$

## Die Characteristics

### DIE DIMENSIONS:

103.5 x 116.5 x 19 ± 1mils

### METALLIZATION:

Type: Si - Al

Thickness: 11kÅ ± 2kÅ

### GLASSIVATION:


Type: Nitrox

Thickness: 10kÅ

### WORST CASE CURRENT DENSITY:

$1.9 \times 10^5 \text{ A/cm}^2$

## Metallization Mask Layout

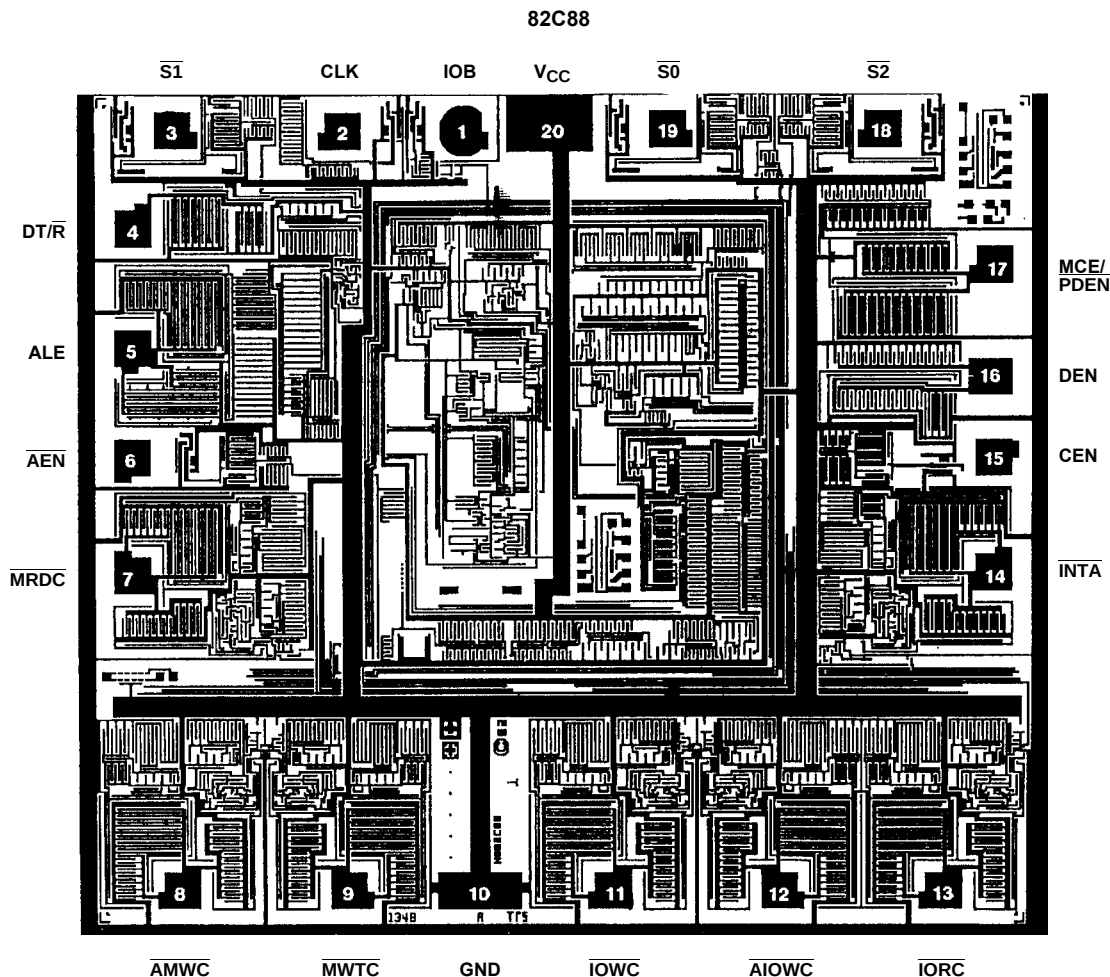

All Intersil U.S. products are manufactured, assembled and tested utilizing ISO9000 quality systems.

Intersil Corporation's quality certifications can be viewed at [www.intersil.com/design/quality](http://www.intersil.com/design/quality)

*Intersil products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design, software and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.*

For information regarding Intersil Corporation and its products, see [www.intersil.com](http://www.intersil.com)



## О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

**Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.**

### Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (XC), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

## Перечень производителей, продукцию которых мы поставляем на российский рынок





Trade Electronics.ru

гарантия бесперебойности производства и  
качества выпускаемой продукции

С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

<http://www.tradeelectronics.ru/>