

TOSHIBA Zenzer Diode Silicon Epitaxial Planar Type


02CZ2.0~02CZ47

Constant Voltage Regulation Applications

Reference Voltage Applications

- Small package: SC-59
- Nominal voltage tolerance about $\pm 2.5\%$ (4.3V~24V)

Unit in mm

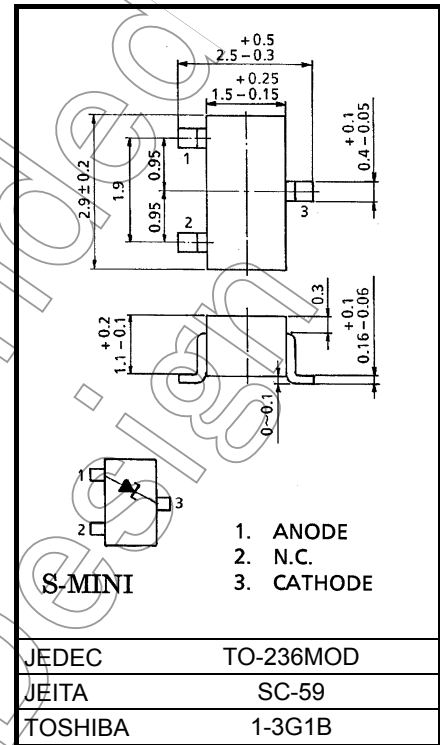

Weight: 0.012g


Absolute Maximum Ratings (Ta = 25°C)

Characteristic	Symbol	Rating	Unit
Power dissipation	P	200	mW
Junction temperature	T _j	150	°C
Storage temperature range	T _{stg}	-55~150	°C


Note: Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings.

Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook ("Handling Precautions"/"Derating Concept and Methods") and individual reliability data (i.e. reliability test report and estimated failure rate, etc).

Marking



(02CZ15-X)



(02CZ2.4-Z)

Electrical Characteristics (Ta = 25°C)

Type No.	Zener Voltage			Dynamic Impedance		Knee Dynamic Impedance		Reverse Current	
	* V _Z (V)		I _Z (mA)	Z _Z (Ω)	I _Z (mA)	Z _{ZK} (Ω)	I _Z (mA)	I _R (μA)	V _R (V)
	Min	Max		Max		Max		Max	
02CZ2.0 (**)	1.85	2.15	5	100	5	1000	0.5	120	1.0
02CZ2.2 (**)	2.05	2.38	5	100	5	1000	0.5	120	1.0
02CZ2.4	2.28	2.60	5	100	5	1000	0.5	120	1.0
02CZ2.7	2.50	2.90	5	110	5	1000	0.5	120	1.0
02CZ3.0	2.80	3.20	5	120	5	1000	0.5	50	1.0
02CZ3.3	3.10	3.50	5	130	5	1000	0.5	20	1.0
02CZ3.6	3.40	3.80	5	130	5	1000	0.5	10	1.0
02CZ3.9	3.70	4.10	5	130	5	1000	0.5	10	1.0
02CZ4.3	4.00	4.50	5	130	5	1000	0.5	5	1.0
02CZ4.7	4.40	4.90	5	120	5	1000	0.5	5	1.0
02CZ5.1	4.80	5.40	5	70	5	1000	0.5	1	1.5
02CZ5.6	5.30	6.00	5	40	5	900	0.5	1	2.5
02CZ6.2	5.80	6.60	5	30	5	500	0.5	1	3.0
02CZ6.8	6.40	7.20	5	25	5	150	0.5	0.5	5.0
02CZ7.5	7.00	7.90	5	23	5	120	0.5	0.5	6.0
02CZ8.2	7.70	8.70	5	20	5	120	0.5	0.5	6.5
02CZ9.1	8.50	9.60	5	18	5	120	0.5	0.5	7.0
02CZ10	9.40	10.60	5	15	5	120	0.5	0.5	8.0
02CZ11	10.40	11.60	5	15	5	120	0.5	0.5	8.5
02CZ12	11.40	12.60	5	15	5	110	0.5	0.5	9.0
02CZ13	12.40	14.10	5	15	5	110	0.5	0.5	10
02CZ15	13.80	15.60	5	15	5	110	0.5	0.5	11
02CZ16	15.30	17.10	5	18	5	150	0.5	0.5	12
02CZ18	16.80	19.10	5	20	5	150	0.5	0.5	14
02CZ20	18.80	21.20	5	25	5	200	0.5	0.5	15
02CZ22	20.80	23.30	5	30	5	200	0.5	0.5	17
02CZ24	22.80	25.60	5	40	5	200	0.5	0.5	19
02CZ27	25.10	28.90	2	70	2	250	0.5	0.5	21
02CZ30	28.00	32.00	2	80	2	250	0.5	0.5	23
02CZ33	31.00	35.00	2	80	2	250	0.5	0.5	25
02CZ36	34.00	38.00	2	90	2	250	0.5	0.5	27
02CZ39	37.00	41.00	2	100	2	250	0.5	0.5	30
02CZ43	40.00	45.00	2	130	2	—	—	0.5	33
02CZ47	44.00	49.00	2	150	2	—	—	0.5	36

(*)Test time : t = 30ms (**) Product by order

Zener Voltage Classification







Type No.		Zener Voltage V_Z (V) $t = 30\text{ms}$ $I_Z = 5\text{mA}$	
		Min	Max
02CZ2.0-X	X	1.85	2.05
02CZ2.0-Z	Z	1.95	2.15
02CZ2.2-X	X	2.05	2.26
02CZ2.2-Z	Z	2.16	2.38
02CZ2.4-X	X	2.28	2.50
02CZ2.4-Z	Z	2.40	2.60
02CZ2.7-X	X	2.50	2.75
02CZ2.7-Z	Z	2.65	2.90
02CZ3.0-X	X	2.80	3.05
02CZ3.0-Z	Z	2.95	3.20
02CZ3.3-X	X	3.10	3.35
02CZ3.3-Z	Z	3.25	3.50
02CZ3.6-X	X	3.40	3.65
02CZ3.6-Z	Z	3.55	3.80
02CZ3.9-X	X	3.70	3.97
02CZ3.9-Z	Z	3.87	4.10
02CZ4.3-X	X	4.00	4.23
02CZ4.3-Y	Y	4.13	4.35
02CZ4.3-Z	Z	4.25	4.50
02CZ4.7-X	X	4.40	4.63
02CZ4.7-Y	Y	4.53	4.76
02CZ4.7-Z	Z	4.66	4.90
02CZ5.1-X	X	4.80	5.07
02CZ5.1-Y	Y	4.97	5.24
02CZ5.1-Z	Z	5.14	5.40
02CZ5.6-X	X	5.30	5.63
02CZ5.6-Y	Y	5.43	5.81
02CZ5.6-Z	Z	5.61	6.00






Zener Voltage Classification

Type No.		Zener Voltage V_Z (V) $t=30ms$ $I_Z = 5mA$	
		Min	Max
02CZ6.2-X	X	5.80	6.20
02CZ6.2-Y	Y	6.00	6.39
02CZ6.2-Z	Z	6.19	6.60
02CZ6.8-X	X	6.40	6.80
02CZ6.8-Y	Y	6.60	7.02
02CZ6.8-Z	Z	6.82	7.20
02CZ7.5-X	X	7.00	7.43
02CZ7.5-Y	Y	7.23	7.66
02CZ7.5-Z	Z	7.46	7.90
02CZ8.2-X	X	7.70	8.16
02CZ8.2-Y	Y	7.96	8.43
02CZ8.2-Z	Z	8.23	8.70
02CZ9.1-X	X	8.50	9.00
02CZ9.1-Y	Y	8.80	9.30
02CZ9.1-Z	Z	9.10	9.60
02CZ10-X	X	9.40	9.93
02CZ10-Y	Y	9.73	10.26
02CZ10-Z	Z	10.06	10.60
02CZ11-X	X	10.40	10.98
02CZ11-Y	Y	10.73	11.26
02CZ11-Z	Z	11.06	11.60
02CZ12-X	X	11.40	11.93
02CZ12-Y	Y	11.73	12.26
02CZ12-Z	Z	12.06	12.60
02CZ13-X	X	12.40	13.08
02CZ13-Y	Y	12.88	13.57
02CZ13-Z	Z	13.37	14.10

Zener Voltage Classification

Type No.		Zener Voltage V_Z (V) $t = 30\text{ms}$ $I_Z = 5\text{mA}$	
		Min	Max
02CZ15-X	X	13.80	14.63
02CZ15-Y	Y	14.33	15.11
02CZ15-Z	Z	14.81	15.60
02CZ16-X	X	15.30	16.10
02CZ16-Y	Y	15.80	16.60
02CZ16-Z	Z	16.30	17.10
02CZ18-X	X	16.80	17.76
02CZ18-Y	Y	17.46	18.43
02CZ18-Z	Z	18.13	19.10
02CZ20-X	X	18.80	19.78
02CZ20-Y	Y	19.48	20.46
02CZ20-Z	Z	20.16	21.20
02CZ22-X	X	20.80	21.88
02CZ22-Y	Y	21.48	22.56
02CZ22-Z	Z	22.16	23.30
02CZ24-X	X	22.80	24.11
02CZ24-Y	Y	23.61	24.92
02CZ24-Z	Z	24.42	25.60

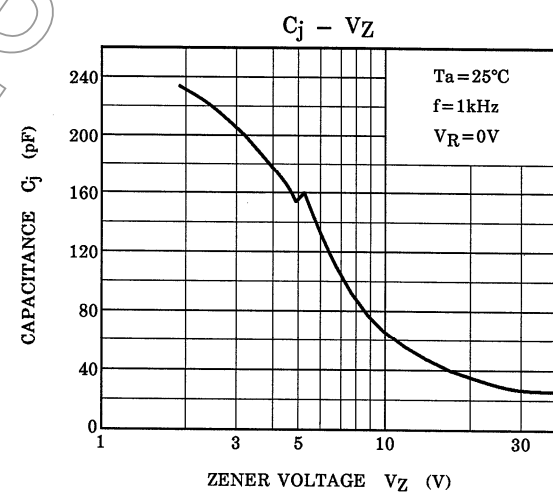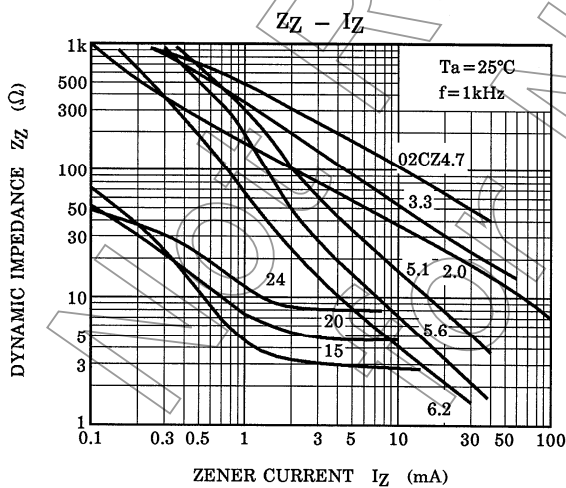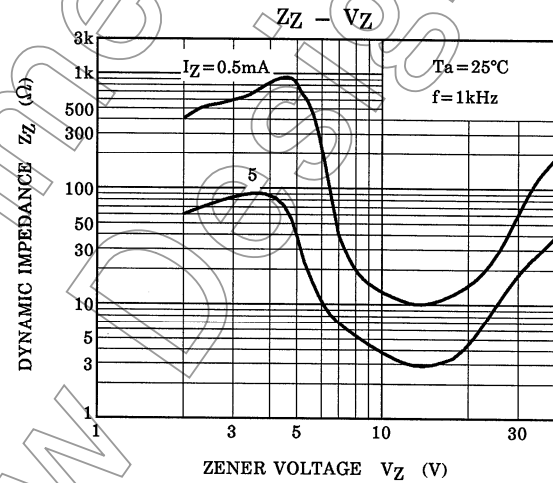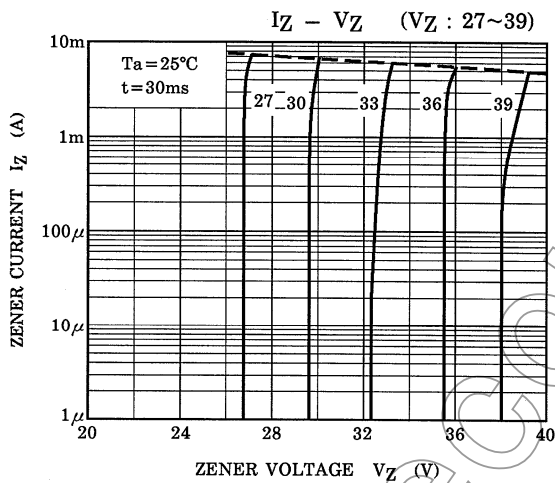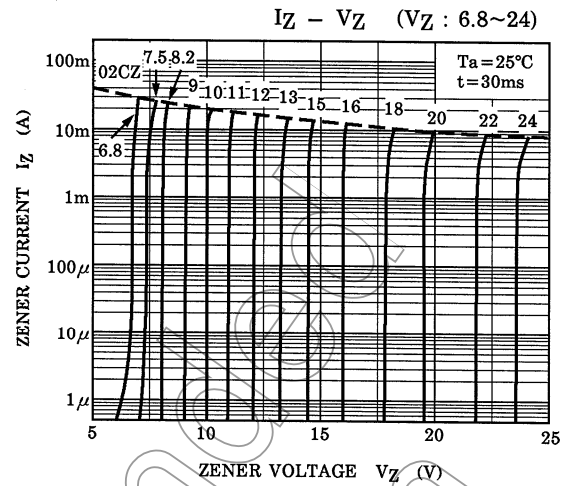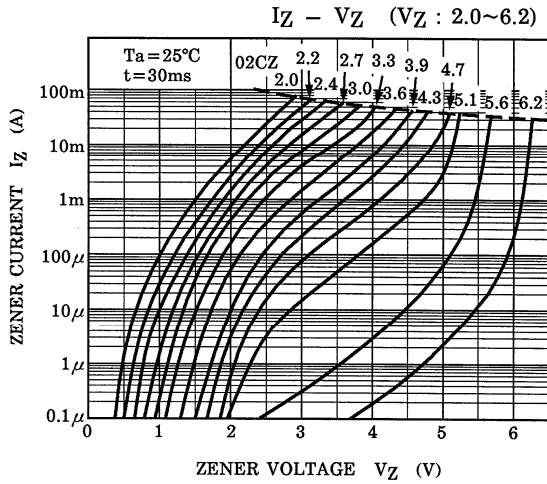

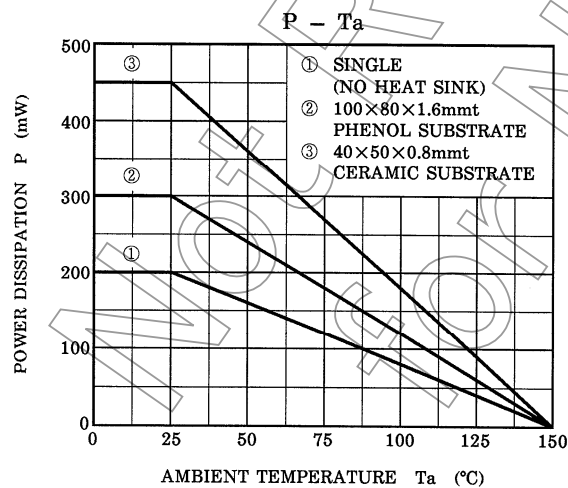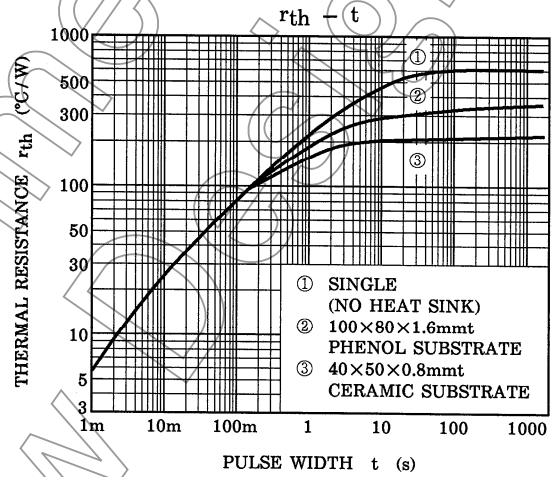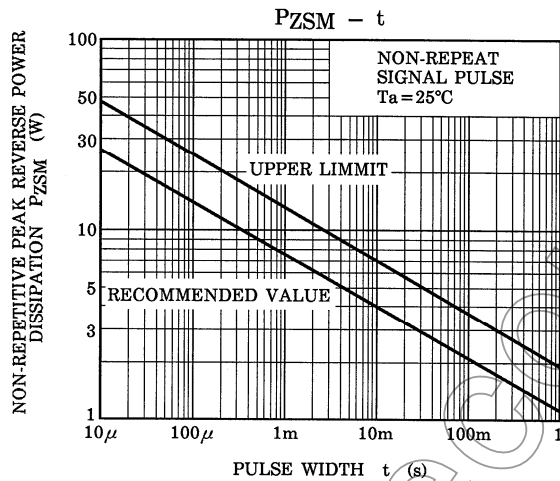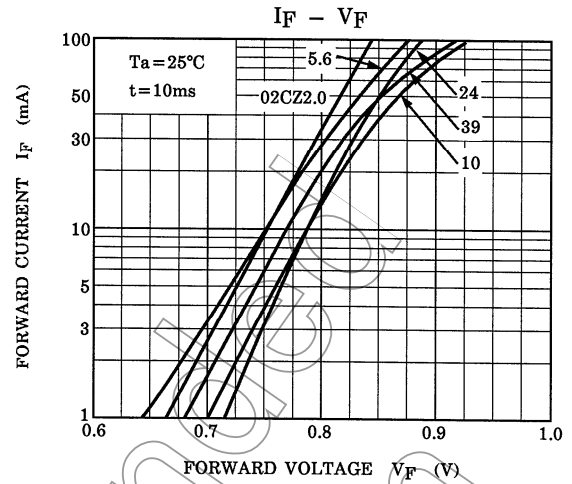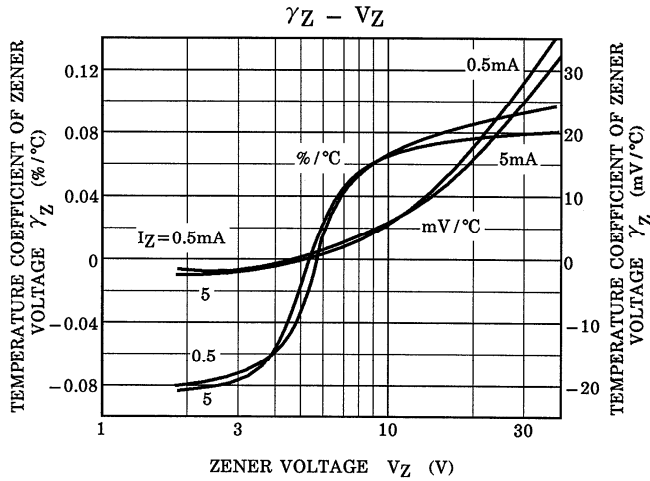

RESTRICTIONS ON PRODUCT USE

- Toshiba Corporation, and its subsidiaries and affiliates (collectively "TOSHIBA"), reserve the right to make changes to the information in this document, and related hardware, software and systems (collectively "Product") without notice.
- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before creating and producing designs and using, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application that Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. **TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.**
- Product is intended for use in general electronics applications (e.g., computers, personal equipment, office equipment, measuring equipment, industrial robots and home electronics appliances) or for specific applications as expressly stated in this document. Product is neither intended nor warranted for use in equipment or systems that require extraordinarily high levels of quality and/or reliability and/or a malfunction or failure of which may cause loss of human life, bodily injury, serious property damage or serious public impact ("Unintended Use"). Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, medical equipment, equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices, elevators and escalators, devices related to electric power, and equipment used in finance-related fields. Do not use Product for Unintended Use unless specifically permitted in this document.
- Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- **ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.**
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. TOSHIBA assumes no liability for damages or losses occurring as a result of noncompliance with applicable laws and regulations.



О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.


Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (XC), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

Перечень производителей, продукцию которых мы поставляем на российский рынок





Trade Electronics.ru

гарантия бесперебойности производства и
качества выпускаемой продукции

С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

<http://www.tradeelectronics.ru/>