

# FAN4800A/C, FAN4801/02/02L PFC/PWM Controller Combination

## Features

- Pin-to-Pin Compatible with ML4800 and FAN4800 and CM6800 and CM6800A
- PWM Configurable for Current-Mode or Feed-forward Voltage-Mode Operation
- Internally Synchronized Leading-Edge PFC and Trailing-Edge PWM in one IC
- Low Operating Current
- Innovative Switching-Charge Multiplier Divider
- Average-Current-Mode for Input-Current Shaping
- PFC Over-Voltage and Under-Voltage Protections
- PFC Feedback Open-Loop Protection
- Peak Current Limiting for PFC
- Cycle-by-Cycle Current Limiting for PWM
- Power-On Sequence Control and Soft-Start
- Brownout Protection
- Interleaved PFC/PWM Switching
- FAN4801/02/02L Improve Efficiency at Light Load
- $f_{RTCT}=4 \cdot f_{PFC}=4 \cdot f_{PWM}$  for FAN4800A and FAN4801
- $f_{RTCT}=4 \cdot f_{PFC}=2 \cdot f_{PWM}$  for FAN4800C and FAN4802/02L

## Applications

- Desktop PC Power Supply
- Internet Server Power Supply
- LCD TV, Monitor Power Supply
- UPS
- Battery Charger
- DC Motor Power Supply
- Monitor Power Supply
- Telecom System Power Supply
- Distributed Power

## Description

The highly integrated FAN4800A/C and FAN4801/02/2L are specially designed for power supplies that consist of boost PFC and PWM. They require very few external components to achieve versatile protections / compensation. They are available in 16-pin DIP and SOP packages.

The PWM can be used in either current or voltage mode. In voltage mode, feed-forward from the PFC output bus can reduce the secondary output ripple.

Compared with older productions, ML4800 and FAN4800, FAN4800A/C and FAN4801/02/02L have lower operation current that save power consumption in external devices. FAN4800A/C and FAN4801/1S/2/2L have accurate 49.9% maximum duty of PWM that makes the hold-up time longer. Brownout protection and PFC soft-start functions are not in ML4800 and FAN4800.

To evaluate FAN4800A/C, FAN4801/02/2L for replacing existing FAN4800 and ML4800 boards, five things must be completed before the fine-tuning procedure:

1. Change  $R_{AC}$  resistor from the old value to a higher resistor: between 6MΩ to 8MΩ.
2. Change RT/CT pin from the existing values to  $R_T=6.8K\Omega$  and  $C_T=1000pF$  to have  $f_{PFC}=64KHz$ ,  $f_{PWM}=64KHz$ .
3. VRMS pin needs to be 1.224V at  $V_{IN}=85 V_{AC}$  for universal input application from line input from 85V<sub>AC</sub> to 270 V<sub>AC</sub>. Both poles for the  $V_{rms}$  of FAN4801/02/02L don't need to substantially slower than FAN4800; about 5 to 10 times.
4. At full load, the average  $V_{EA}$  needs to ~4.5V and the ripple on the  $V_{EA}$  needs to be less than 400mV.
5. Soft-Start pin, the soft-start current has been reduced to half from the FAN4800 capacitor.

## Related Resources

- [AN-8027 - FAN480X PFC+PWM Combination Controller Application](#)

## Ordering Information

| Part Number | Operating Temperature Range | Package                            | Packing Method |
|-------------|-----------------------------|------------------------------------|----------------|
| FAN4800ANY  | -40°C to +105°C             | 16-Pin Dual In-Line Package (DIP)  | Tube           |
| FAN4800CNY  | -40°C to +105°C             | 16-Pin Dual In-Line Package (DIP)  | Tube           |
| FAN4800AMY  | -40°C to +105°C             | 16-Pin Small Outline Package (SOP) | Tape & Reel    |
| FAN4800CMY  | -40°C to +105°C             | 16-Pin Small Outline Package (SOP) | Tape & Reel    |
| FAN4801NY   | -40°C to +105°C             | 16-Pin Dual In-Line Package (DIP)  | Tube           |
| FAN4802NY   | -40°C to +105°C             | 16-Pin Dual In-Line Package (DIP)) | Tube           |
| FAN4802LNY  | -40°C to +105°C             | 16-Pin Dual In-Line Package (DIP)) | Tube           |
| FAN4801MY   | -40°C to +105°C             | 16-Pin Small Outline Package (SOP) | Tape & Reel    |
| FAN4802MY   | -40°C to +105°C             | 16-Pin Small Outline Package (SOP) | Tape & Reel    |
| FAN4802LMY  | -40°C to +105°C             | 16-Pin Small Outline Package (SOP) | Tape & Reel    |

| Part Number | PFC:PWM Frequency Ratio | Brownout / In | Range In / Out |
|-------------|-------------------------|---------------|----------------|
| FAN4800ANY  | 1:1                     | 1.05V / 1.9V  | N.A            |
| FAN4800AMY  | 1:1                     | 1.05V / 1.9V  | N.A            |
| FAN4800CNY  | 1:2                     | 1.05V / 1.9V  | N.A            |
| FAN4800CMY  | 1:2                     | 1.05V / 1.9V  | N.A            |
| FAN4801NY   | 1:1                     | 1.05V / 1.9V  | 1.95V / 2.45V  |
| FAN4802NY   | 1:2                     | 1.05V / 1.9V  | 1.95V / 2.45V  |
| FAN4802LNY  | 1:2                     | 0.9V / 1.65V  | 1.95V / 2.45V  |
| FAN4801MY   | 1:1                     | 1.05V / 1.9V  | 1.95V / 2.45V  |
| FAN4802MY   | 1:2                     | 1.05V / 1.9V  | 1.95V / 2.45V  |
| FAN4802LMY  | 1:2                     | 0.9V / 1.65V  | 1.95V / 2.45V  |

## Application Diagram


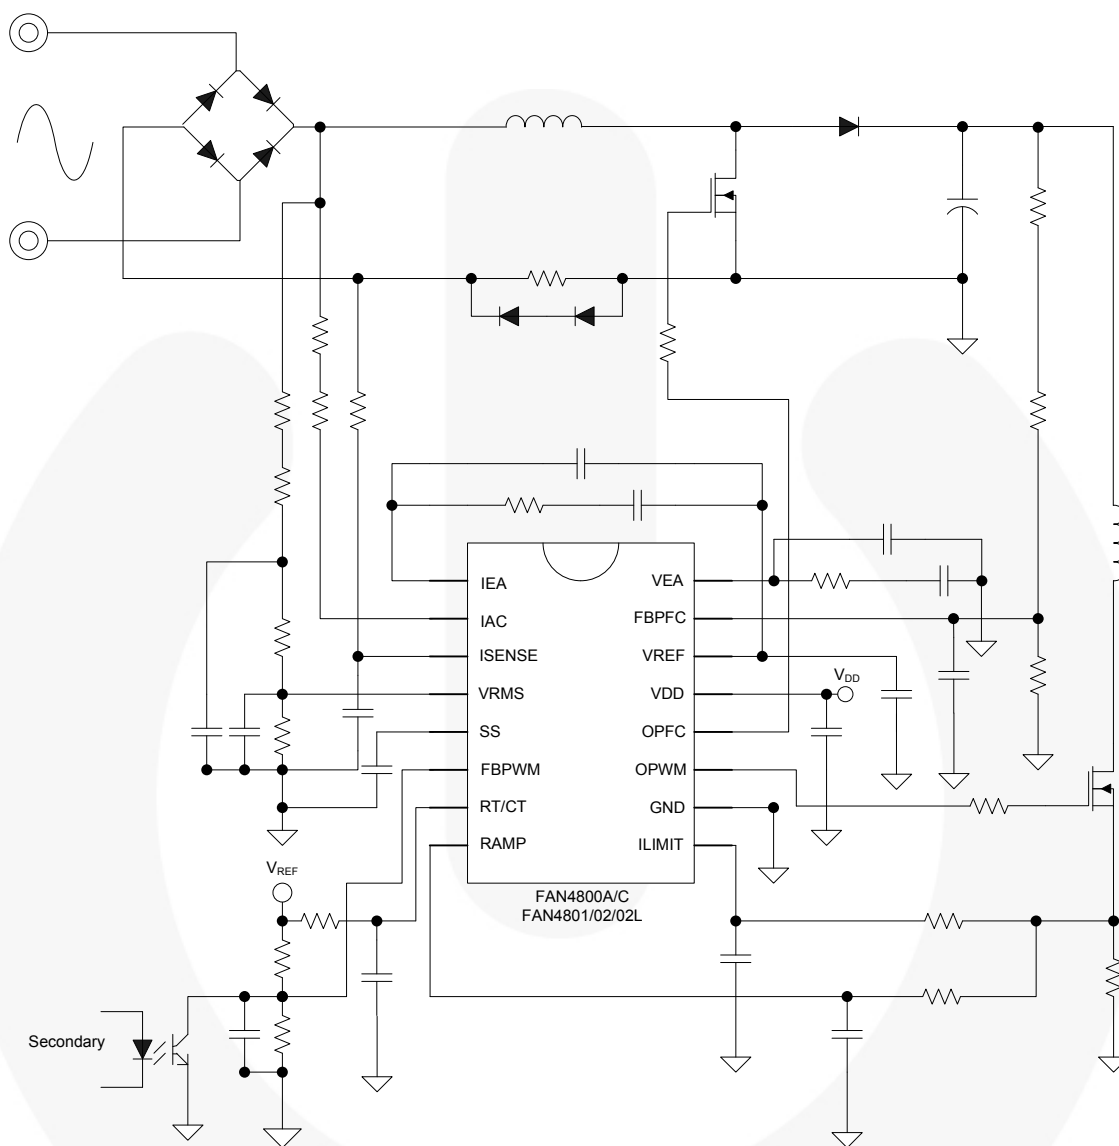



Figure 1. Typical Application Current Mode

**Figure 2. Typical Application Voltage Mode**

## Block Diagram

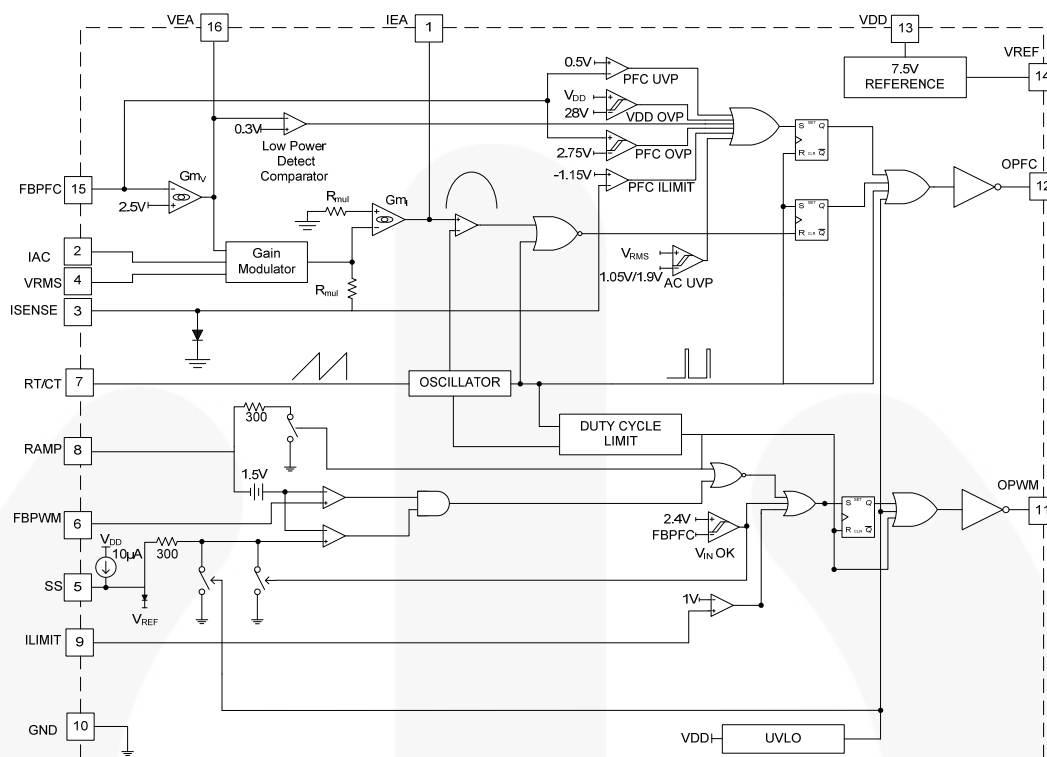

**Figure 3. FAN4800A/C Function Block Diagram**

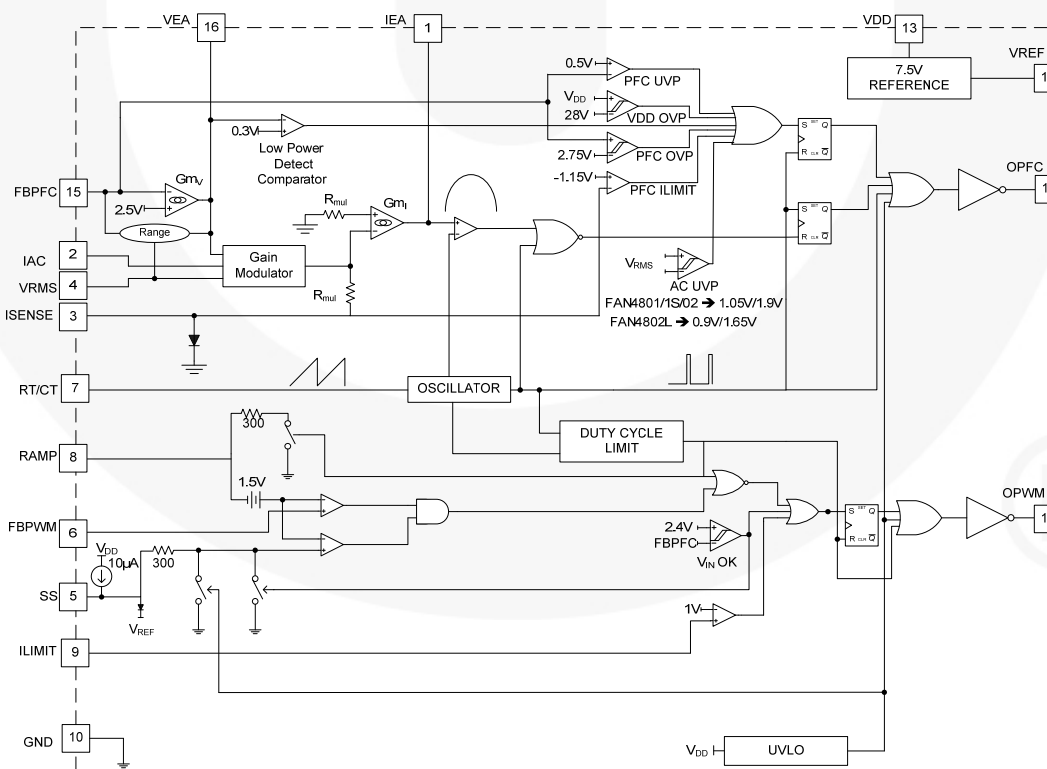

**Figure 4. FAN4801/02/02L Function Block Diagram**

## Marking Information

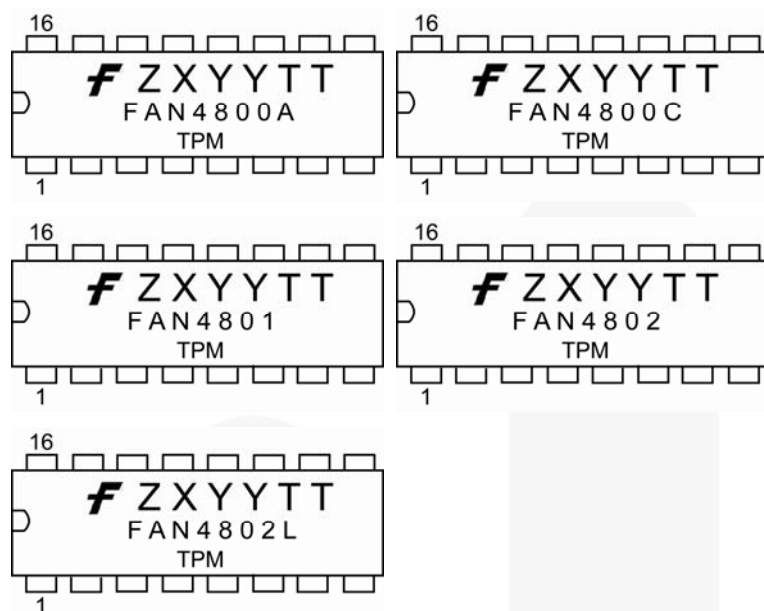


Figure 5. DIP Top Mark

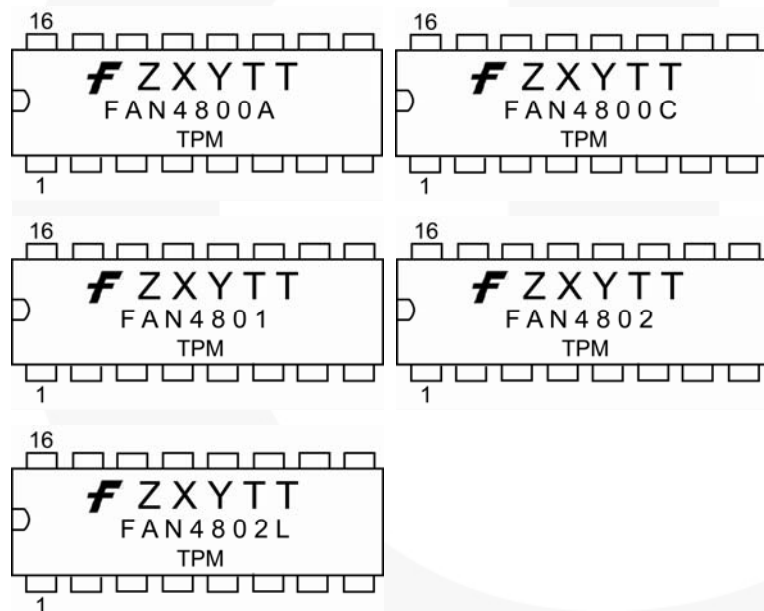


Figure 6. SOP Top Mark

**F** – Fairchild Logo  
**Z** – Plant Code  
**X** – 1-Digit Year Code  
**Y** – 2-Digit Week Code  
**TT** – 2-Digit Die-Run Code  
**T** – Package Type (M:SOP)  
**P** – Y: Green Package  
**M** – Manufacture Flow Code

**F** – Fairchild Logo  
**Z** – Plant Code  
**X** – 1-Digit Year Code  
**Y** – 1-Digit Week Code  
**TT** – 2-Digit Die-Run Code  
**T** – Package Type (M:SOP)  
**P** – Y: Green Package  
**M** – Manufacture Flow Code

## Pin Configuration

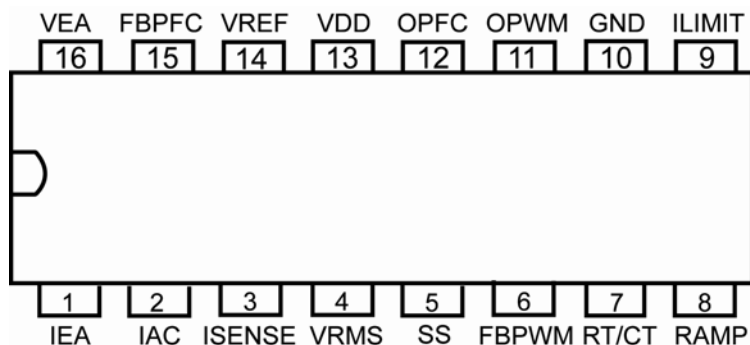


Figure 7. Pin Configuration (Top View)

## Pin Definitions

| Pin # | Name   | Description                                                                                                                                                                                                                                                                              |
|-------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1     | IEA    | <b>Output of PFC Current Amplifier.</b> The signal from this pin is compared with an internal sawtooth to determine the pulse width for PFC gate drive.                                                                                                                                  |
| 2     | IAC    | <b>Input AC Current.</b> For normal operation, this input provides current reference for the multiplier. The suggested maximum IAC is 100 $\mu$ A.                                                                                                                                       |
| 3     | ISENSE | <b>PFC Current Sense.</b> The non-inverting input of the PFC current amplifier and the output of multiplier and PFC ILIMIT comparator.                                                                                                                                                   |
| 4     | VRMS   | <b>Line-Voltage Detection.</b> Line voltage detection. The pin is used for PFC multiplier.                                                                                                                                                                                               |
| 5     | SS     | <b>PWM Soft-Start.</b> During startup, the SS pin charges an external capacitor with a 10 $\mu$ A constant current source. The voltage on FBPWM is clamped by SS during startup. In the event of a protection condition occurring and/or PWM disabled, the SS pin is quickly discharged. |
| 6     | FBPWM  | <b>PWM Feedback Input.</b> The control input for voltage-loop feedback of PWM stage.                                                                                                                                                                                                     |
| 7     | RT/CT  | <b>Oscillator RC Timing Connection.</b> Oscillator timing node; timing set by R <sub>T</sub> and C <sub>T</sub> .                                                                                                                                                                        |
| 8     | RAMP   | <b>PWM RAMP Input.</b> In current mode, this pin functions as the current sense input; when in voltage mode, it is the feed forward sense input from PFC output 380V (feedforward ramp).                                                                                                 |
| 9     | ILIMIT | <b>Peak Current Limit Setting for PWM.</b> The peak current limits setting for PWM.                                                                                                                                                                                                      |
| 10    | GND    | <b>Ground.</b>                                                                                                                                                                                                                                                                           |
| 11    | OPWM   | <b>PWM Gate Drive.</b> The totem-pole output drive for PWM MOSFET. This pin is internally clamped under 15V to protect the MOSFET.                                                                                                                                                       |
| 12    | OPFC   | <b>PFC Gate Drive.</b> The totem pole output drive for PWM MOSFET. This pin is internally clamped under 15V to protect the MOSFET.                                                                                                                                                       |
| 13    | VDD    | <b>Supply.</b> The power supply pin. The threshold voltages for startup and turn-off are 11V and 9.3V, respectively. The operating current is lower than 10mA.                                                                                                                           |
| 14    | VREF   | <b>Reference Voltage.</b> Buffered output for the internal 7.5V reference.                                                                                                                                                                                                               |
| 15    | FBPFC  | <b>Voltage Feedback Input for PFC.</b> The feedback input for PFC voltage loop. The inverting input of PFC error amplifier. This pin is connected to the PFC output through a divider network.                                                                                           |
| 16    | VEA    | <b>Output of PFC Voltage Amplifier.</b> The error amplifier output for PFC voltage feedback loop. A compensation network is connected between this pin and ground.                                                                                                                       |

## Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

| Symbol        | Parameter                                  | Min.                              | Max.           | Unit               |
|---------------|--------------------------------------------|-----------------------------------|----------------|--------------------|
| $V_{DD}$      | DC Supply Voltage                          |                                   | 30             | V                  |
| $V_H$         | SS, FBPWM, RAMP, OPWM, OPFC                | -0.3                              | 30.0           | V                  |
| $V_L$         | IAC, VRMS, RT/CT, ILIMIT, FBPFC, VEA       | -0.3                              | 7.0            | V                  |
| $V_{VREF}$    | VREF                                       |                                   | 7.5            | V                  |
| $V_{IEA}$     | IEA                                        | 0                                 | $V_{VREF}+0.3$ | V                  |
| $V_N$         | ISENSE                                     | -5.0                              | 0.7            | V                  |
| $I_{AC}$      | Input AC Current                           |                                   | 1              | mA                 |
| $I_{REF}$     | VREF Output Current                        |                                   | 5              | mA                 |
| $I_{PFC-OUT}$ | Peak PFC OUT Current, Source or Sink       |                                   | 0.5            | A                  |
| $I_{PWM-OUT}$ | Peak PWM OUT Current, Source or Sink       |                                   | 0.5            | A                  |
| $P_D$         | Power Dissipation $T_A < 50^\circ\text{C}$ |                                   | 800            | mW                 |
| $\Theta_{JA}$ | Thermal Resistance (Junction-to-Air)       | DIP                               | 80.80          | $^\circ\text{C/W}$ |
|               |                                            | SOP                               | 104.10         | $^\circ\text{C/W}$ |
| $T_J$         | Operating Junction Temperature             | -40                               | +125           | $^\circ\text{C}$   |
| $T_{STG}$     | Storage Temperature Range                  | -55                               | +150           | $^\circ\text{C}$   |
| $T_L$         | Lead Temperature (Soldering)               |                                   | +260           | $^\circ\text{C}$   |
| ESD           | Electrostatic Discharge Capability         | Human Body Model, JESD22-A114     | 4.5            | kV                 |
|               |                                            | Charged Device Model, JESD22-C101 | 1000           | V                  |

### Notes:

1. All voltage values, except differential voltage, are given with respect to GND pin.
2. Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device.

## Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. Fairchild does not recommend exceeding them or designing to Absolute Maximum Ratings.

| Symbol | Parameter                     | Min. | Max. | Unit             |
|--------|-------------------------------|------|------|------------------|
| $T_A$  | Operating Ambient Temperature | -40  | +105 | $^\circ\text{C}$ |



## Electrical Characteristics

$V_{DD}=15V$ ,  $T_A=25^{\circ}C$ ,  $R_T=6.8k\Omega$ ,  $C_T=1000pF$  unless noted operating specifications.

| Symbol                              | Parameter                                            | Conditions                                                                                  | Min. | Typ. | Max. | Units   |
|-------------------------------------|------------------------------------------------------|---------------------------------------------------------------------------------------------|------|------|------|---------|
| <b>V<sub>DD</sub> Section</b>       |                                                      |                                                                                             |      |      |      |         |
| $I_{DD-ST}$                         | Startup Current                                      | $V_{DD}=V_{TH-ON}-0.1V$ ; OPFC OPWM Open                                                    |      | 30   | 80   | $\mu A$ |
| $I_{DD-OP}$                         | Operating Current                                    | $V_{DD}=13V$ ; OPFC OPWM Open                                                               | 2.0  | 2.6  | 5.0  | mA      |
| $V_{TH-ON}$                         | Turn-On Threshold Voltage                            |                                                                                             | 10   | 11   | 12   | V       |
| $\Delta V_{TH}$                     | Hysteresis                                           |                                                                                             | 1.5  |      | 1.9  | V       |
| $V_{DD-OVP}$                        | $V_{DD}$ OVP                                         |                                                                                             | 27   | 28   | 29   | V       |
| $\Delta V_{DD-OVP}$                 | $V_{DD}$ OVP Hysteresis                              |                                                                                             |      | 1    |      | V       |
| <b>Oscillator</b>                   |                                                      |                                                                                             |      |      |      |         |
| $f_{OSC-RT/CT}$                     | RT/CT Frequency                                      | $R_T=6.8k\Omega$ , $C_T=1000pF$                                                             | 240  | 256  | 268  | kHz     |
| $f_{OSC}$                           | PFC & PWM Frequency                                  | $R_T=6.8k\Omega$ , $C_T=1000pF$                                                             | 60   | 64   | 67   | kHz     |
|                                     | FAN4800C, FAN4802/02L PWM Frequency                  |                                                                                             | 120  | 128  | 134  |         |
| $f_{DV}$                            | Voltage Stability                                    | $11V \leq V_{DD} \leq 22V$                                                                  |      |      | 2    | %       |
| $f_{DT}$                            | Temperature Stability                                | $-40^{\circ}C \sim +105^{\circ}C$                                                           |      |      | 2    | %       |
| $f_{TV}$                            | Total Variation (PFC and PWM) <sup>(3)</sup>         | Line, Temperature                                                                           | 58   |      | 70   | kHz     |
| $f_{RV}$                            | Ramp Voltage <sup>(3)</sup>                          | Valley to Peak                                                                              |      | 2.8  |      | V       |
| $I_{Discharge}$                     | Discharge Current                                    | $V_{RAMP}=0V$ , $V_{RT/CT}=2.5V$                                                            | 6.5  |      | 15   | mA      |
| $f_{RANGE}$                         | Frequency Range <sup>(3)</sup>                       |                                                                                             | 50   |      | 75   | kHz     |
| $t_{PFCD}$                          | PFC Dead Time                                        | $R_T=6.8k\Omega$ , $C_T=1000pF$                                                             | 400  | 600  | 800  | ns      |
| <b>VREF</b>                         |                                                      |                                                                                             |      |      |      |         |
| $V_{VREF}$                          | Reference Voltage                                    | $I_{REF}=0mA$ , $C_{REF}=0.1\mu F$                                                          | 7.4  | 7.5  | 7.6  | V       |
| $\Delta V_{VREF1}$                  | Load Regulation of Reference Voltage                 | $C_{REF}=0.1\mu F$ , $I_{REF}=0mA$ to $3.5mA$<br>$V_{VDD}=14V$ , Rise/Fall Time $> 20\mu s$ |      | 30   | 50   | mV      |
| $\Delta V_{VREF2}$                  | Line Regulation of Reference Voltage                 | $C_{REF}=0.1\mu F$ , $V_{VDD}=11V$ to $22V$                                                 |      |      | 25   | mV      |
| $\Delta V_{VREF-DT}$                | Temperature Stability <sup>(3)</sup>                 | $-40^{\circ}C \sim +105^{\circ}C$                                                           |      | 0.4  | 0.5  | %       |
| $\Delta V_{VREF-TV}$                | Total Variation <sup>(3)</sup>                       | Line, Load, Temperature                                                                     | 7.35 |      | 7.65 | V       |
| $\Delta V_{VREF-LS}$                | Long-Term Stability <sup>(3)</sup>                   | $T_J=125^{\circ}C$ , $0 \sim 1000HRs$                                                       | 5    |      | 25   | mV      |
| $I_{REF-MAX}$                       | Maximum Current                                      | $V_{VREF} > 7.35V$                                                                          | 5    |      |      | mA      |
| $I_{OS}$                            | Output Short Circuit <sup>(3)</sup>                  |                                                                                             |      | 25   |      | mA      |
| <b>PFC OVP Comparator</b>           |                                                      |                                                                                             |      |      |      |         |
| $V_{PFC-OVP}$                       | Over-Voltage Protection                              |                                                                                             | 2.70 | 2.75 | 2.80 | V       |
| $\Delta V_{PFC-OVP}$                | PFC OVP Hysteresis                                   |                                                                                             | 200  | 250  | 300  | mV      |
| <b>Low-Power Detect Comparator</b>  |                                                      |                                                                                             |      |      |      |         |
| $V_{EAOFF}$                         | $V_{EA}$ Voltage OFF OPFC                            |                                                                                             | 0.2  | 0.3  | 0.4  | V       |
| <b>V<sub>IN</sub> OK Comparator</b> |                                                      |                                                                                             |      |      |      |         |
| $V_{RD-FBPFC}$                      | Voltage Level on FBPFC to Enable OPWM During Startup |                                                                                             | 2.3  | 2.4  | 2.5  | V       |
| $\Delta V_{RD-FBPFC}$               | Hysteresis                                           |                                                                                             | 1.15 | 1.25 | 1.35 | V       |

**Electrical Characteristics** (Continued)V<sub>DD</sub>=15V, T<sub>A</sub>=25°C, R<sub>T</sub>=6.8kΩ, C<sub>T</sub>=1000pF unless noted operating specifications.

| Symbol                         | Parameter                                                                        | Conditions                                                                              | Min. | Typ. | Max.  | Units |
|--------------------------------|----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|------|------|-------|-------|
| <b>Voltage Error Amplifier</b> |                                                                                  |                                                                                         |      |      |       |       |
| FBPFC                          | Input Voltage Range <sup>(3)</sup>                                               |                                                                                         | 0    |      | 6     | V     |
| V <sub>ref</sub>               | Reference Voltage                                                                | at T=25°C                                                                               | 2.45 | 2.50 | 2.55  | V     |
| A <sub>V</sub>                 | Open-Loop Gain <sup>(3)</sup>                                                    |                                                                                         | 35   | 42   |       | dB    |
| G <sub>mV</sub>                | Transconductance                                                                 | V <sub>NONINV</sub> =V <sub>INV</sub> , V <sub>VEA</sub> =3.75V at T=25°C               | 50   | 70   | 90    | μmho  |
| I <sub>FBPFC-L</sub>           | Maximum Source Current                                                           | V <sub>FBPFC</sub> =2V, V <sub>VEA</sub> =1.5V                                          | 40   | 50   |       | μA    |
| I <sub>FBPFC-H</sub>           | Maximum Sink Current                                                             | V <sub>FBPFC</sub> =3V, V <sub>VEA</sub> =6V                                            |      | -50  | -40   | μA    |
| I <sub>BS</sub>                | Input Bias Current                                                               |                                                                                         | -1   |      | 1     | μA    |
| V <sub>VEA-H</sub>             | Output High Voltage on V <sub>VEA</sub>                                          |                                                                                         | 5.8  | 6    |       | V     |
| V <sub>VEA-L</sub>             | Output Low Voltage on V <sub>VEA</sub>                                           |                                                                                         |      | 0.1  | 0.4   | V     |
| <b>Current Error Amplifier</b> |                                                                                  |                                                                                         |      |      |       |       |
| V <sub>ISENSE</sub>            | Input Voltage Range (ISENSE Pin) <sup>(3)</sup>                                  |                                                                                         | -1.5 |      | 0.7   | V     |
| G <sub>mI</sub>                | Transconductance                                                                 | V <sub>NONINV</sub> =V <sub>INV</sub> , V <sub>IEA</sub> =3.75V                         | 78   | 88   | 100   | μmho  |
| V <sub>OFFSET</sub>            | Input Offset Voltage                                                             | V <sub>VEA</sub> =0V, I <sub>AC</sub> Open                                              | -10  |      | 10    | mV    |
| V <sub>IEA-H</sub>             | Output High Voltage                                                              |                                                                                         | 6.8  | 7.4  | 8.0   | V     |
| V <sub>IEA-L</sub>             | Output Low Voltage                                                               |                                                                                         |      | 0.1  | 0.4   | V     |
| I <sub>L</sub>                 | Source Current                                                                   | V <sub>ISENSE</sub> =-0.6V, V <sub>IEA</sub> =1.5V                                      | 35   | 50   |       | μA    |
| I <sub>H</sub>                 | Sink Current                                                                     | V <sub>ISENSE</sub> =+0.6V, V <sub>IEA</sub> =4.0V                                      |      | -50  | -35   | μA    |
| A <sub>I</sub>                 | Open-Loop Gain <sup>(3)</sup>                                                    |                                                                                         | 40   | 50   |       | dB    |
| <b>Tri-Fault Detect</b>        |                                                                                  |                                                                                         |      |      |       |       |
| t <sub>FBPFC_OPEN</sub>        | Time to FBPFC Open <sup>(3)</sup>                                                | V <sub>FBPFC</sub> =V <sub>PFC-UV</sub> to FBPFC OPEN, 470pF from FBPFC to GND          |      | 2    | 4     | ms    |
| V <sub>PFC-UV</sub>            | PFC Feedback Under-Voltage Protection                                            |                                                                                         | 0.4  | 0.5  | 0.6   | V     |
| <b>Gain Modulator</b>          |                                                                                  |                                                                                         |      |      |       |       |
| I <sub>AC</sub>                | Input for AC Current <sup>(3)</sup>                                              | Multiplier Linear Range                                                                 | 0    |      | 100   | μA    |
| GAIN                           | GAIN Modulator <sup>(4)</sup>                                                    | I <sub>AC</sub> =17.67μA, V <sub>RMS</sub> =1.080V V <sub>FBPFC</sub> =2.25V, at T=25°C | 7.50 | 9.00 | 10.50 |       |
|                                |                                                                                  | I <sub>AC</sub> =20μA, V <sub>RMS</sub> =1.224V V <sub>FBPFC</sub> =2.25V, at T=25°C    | 6.30 | 7.00 | 7.70  |       |
|                                |                                                                                  | I <sub>AC</sub> =25.69μA, V <sub>RMS</sub> =1.585V V <sub>FBPFC</sub> =2.25V, at T=25°C | 3.80 | 4.20 | 4.60  |       |
|                                |                                                                                  | I <sub>AC</sub> =51.62μA, V <sub>RMS</sub> =3.169V V <sub>FBPFC</sub> =2.25V, at T=25°C | 0.95 | 1.05 | 1.16  |       |
|                                |                                                                                  | I <sub>AC</sub> =62.23μA, V <sub>RMS</sub> =3.803V V <sub>FBPFC</sub> =2.25V, at T=25°C | 0.66 | 0.73 | 0.80  |       |
| BW                             | Bandwidth <sup>(3)</sup>                                                         | I <sub>AC</sub> =40μA                                                                   |      | 2    |       | kHz   |
| V <sub>o(gm)</sub>             | Output Voltage=5.7kΩ × (I <sub>SENSE</sub> -I <sub>OFFSET</sub> ) <sup>(3)</sup> | I <sub>AC</sub> =20μA, V <sub>RMS</sub> =1.224V V <sub>FBPFC</sub> =2.25V, at T=25°C    | 0.74 | 0.82 | 0.90  | V     |

**Electrical Characteristics** (Continued)

$V_{DD}=15V$ ,  $T_A=25^\circ C$ ,  $R_T=6.8k\Omega$ ,  $C_T=1000pF$  unless noted operating specifications.

| Symbol                                       | Parameter                                                  | Conditions                                                                     | Min.  | Typ.  | Max.  | Units   |
|----------------------------------------------|------------------------------------------------------------|--------------------------------------------------------------------------------|-------|-------|-------|---------|
| <b>PFC <math>I_{LIMIT}</math> Comparator</b> |                                                            |                                                                                |       |       |       |         |
| $V_{PFC-ILIMIT}$                             | Peak Current Limit Threshold Voltage, Cycle-by-Cycle Limit |                                                                                | -1.25 | -1.15 | -1.05 | V       |
| $\Delta V_{pk}$                              | PFC $I_{LIMIT}$ -Gain Modulator Output                     | $I_{AC}=17.67\mu A$ , $V_{RMS}=1.08V$<br>$V_{FBPFC}=2.25V$ , at $T=25^\circ C$ | 200   |       |       | mV      |
| <b>PFC Output Driver</b>                     |                                                            |                                                                                |       |       |       |         |
| $V_{GATE-CLAMP}$                             | Gate Output Clamping Voltage                               | $V_{DD}=22V$                                                                   | 13    | 15    | 17    | V       |
| $V_{GATE-L}$                                 | Gate Low Voltage                                           | $V_{DD}=15V$ ; $I_O=100mA$                                                     |       |       | 1.5   | V       |
| $V_{GATE-H}$                                 | Gate High Voltage                                          | $V_{DD}=13V$ ; $I_O=100mA$                                                     | 8     |       |       | V       |
| $t_r$                                        | Gate Rising Time                                           | $V_{DD}=15V$ ; $C_L=4.7nF$ ; O/P=2V to 9V                                      | 40    | 70    | 120   | ns      |
| $t_f$                                        | Gate Falling Time                                          | $V_{DD}=15V$ ; $C_L=4.7nF$ ; O/P=9V to 2V                                      | 40    | 60    | 110   | ns      |
| $D_{PFC-MAX}$                                | Maximum Duty Cycle                                         | $V_{IEA}<1.2V$                                                                 | 94    | 97    |       | %       |
| $D_{PFC-MIN}$                                | Minimum Duty Cycle                                         | $V_{IEA}>4.5V$                                                                 |       |       | 0     | %       |
| <b>Brownout</b>                              |                                                            |                                                                                |       |       |       |         |
| $V_{RMS-UVL}$                                | $V_{RMS}$ Threshold Low                                    | FAN4800A/C, FAN4801/02                                                         | 1.00  | 1.05  | 1.10  | V       |
|                                              |                                                            | FAN4802L                                                                       | 0.85  | 0.90  | 0.95  | V       |
| $V_{RMS-UVH}$                                | $V_{RMS}$ Threshold High                                   | FAN4800A/C, FAN4801/02                                                         | 1.85  | 1.90  | 1.95  | V       |
|                                              |                                                            | FAN4802L                                                                       | 1.60  | 1.65  | 1.70  | V       |
| $\Delta V_{RMS-UVP}$                         | Hysteresis                                                 | FAN4800A/C, FAN4801/02                                                         | 750   | 850   | 950   | mV      |
|                                              |                                                            | FAN4802L                                                                       | 650   | 750   | 850   | mV      |
| $t_{UVP}$                                    | Under-Voltage Protection Delay Time                        |                                                                                | 340   | 410   | 480   | ms      |
| <b>Soft-Start</b>                            |                                                            |                                                                                |       |       |       |         |
| $V_{SS-MAX}$                                 | Maximum Voltage                                            | $V_{DD}=15V$                                                                   | 9.5   | 10.0  | 10.5  | V       |
| $I_{SS}$                                     | Soft-Start Current                                         |                                                                                |       | 10    |       | $\mu A$ |
| <b>PWM <math>I_{LIMIT}</math> Comparator</b> |                                                            |                                                                                |       |       |       |         |
| $V_{PWM-ILIMIT}$                             | Threshold Voltage                                          |                                                                                | 0.95  | 1.00  | 1.05  | V       |
| $t_{PD}$                                     | Delay to Output                                            |                                                                                |       | 250   |       | ns      |
| $t_{PWM-Bnk}$                                | Leading-Edge Blanking Time                                 |                                                                                | 170   | 250   | 350   | ns      |
| <b>Range (FAN4801/02/02L)</b>                |                                                            |                                                                                |       |       |       |         |
| $V_{RMS-L}$                                  | RMS AC Voltage Low                                         | When $V_{RMS}=1.95V$ at $132V_{RMS}$                                           | 1.90  | 1.95  | 2.00  | V       |
| $V_{RMS-H}$                                  | RMS AC Voltage High                                        | When $V_{RMS}=2.45V$ at $150V_{RMS}$                                           | 2.40  | 2.45  | 2.50  | V       |
| $V_{EA-L}$                                   | VEA Low                                                    | When $V_{VEA}=1.95V$ at 30% Loading,<br>When $V_{VEA}=2.80V$ at 60% Loading    | 1.90  | 1.95  | 2.00  | V       |
| $V_{EA-H}$                                   | VEA High                                                   | When $V_{VEA}=2.45V$ at 40% Loading,<br>When $V_{VEA}=3.35V$ at 70% Loading    | 2.40  | 2.45  | 2.50  | V       |
| $I_{tc}$                                     | Two-Level Current                                          | FBPFC Two-Level Current                                                        | 18    | 20    | 22    | $\mu A$ |

**Electrical Characteristics** (Continued)

$V_{DD}=15V$ ,  $T_A=25^{\circ}C$ ,  $R_T=6.8k\Omega$ ,  $C_T=1000pF$  unless noted operating specifications.

| Symbol                   | Parameter                    | Conditions                 | Min. | Typ. | Max. | Units |
|--------------------------|------------------------------|----------------------------|------|------|------|-------|
| <b>PWM Output Driver</b> |                              |                            |      |      |      |       |
| $V_{GATE-CLAMP}$         | Gate Output Clamping Voltage | $V_{DD}=22V$               | 13   | 15   | 17   | V     |
| $V_{GATE-L}$             | Gate Low Voltage             | $V_{DD}=15V$ ; $I_O=100mA$ |      |      | 1.5  | V     |
| $V_{GATE-H}$             | Gate High Voltage            | $V_{DD}=13V$ ; $I_O=100mA$ | 8    |      |      | V     |
| $t_r$                    | Gate Rising Time             | $V_{DD}=15V$ ; $C_L=4.7nF$ | 30   | 60   | 120  | ns    |
| $t_f$                    | Gate Falling Time            | $V_{DD}=15V$ ; $C_L=4.7nF$ | 30   | 50   | 110  | ns    |
| $D_{PWM-MAX}$            | Maximum Duty Cycle           |                            | 49.0 | 49.5 | 50.0 | %     |
| $V_{PWM-LS}$             | PWM Comparator Level Shift   |                            | 1.3  | 1.5  | 1.8  | V     |

**Notes:**

3. This parameter, although guaranteed by design, is not 100% production tested.
4.  $Gain = K \times 5.3 \times (V_{RMS}^2) - 1$ ;  $K = (I_{SENSE} - I_{OFFSET}) \times [I_{AC} \times (V_{EA} - 0.7V)] - 1$ ;  $V_{EA(MAX.)} = 5.6V$ .

## Typical Characteristics

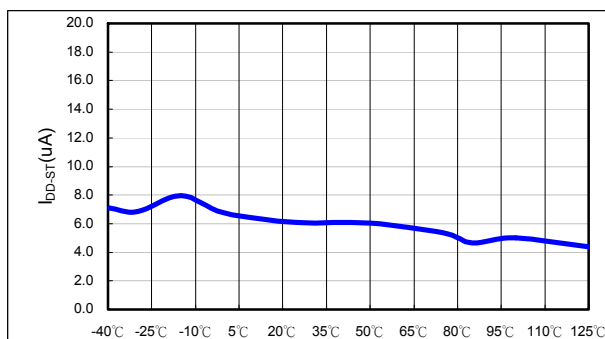


Figure 8.  $I_{DD-ST}$  vs. Temperature

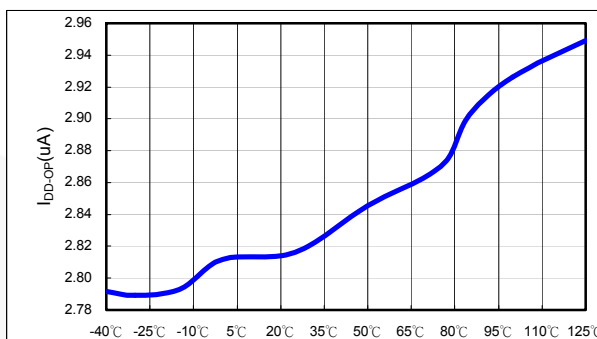


Figure 9.  $I_{DD-OP}$  vs. Temperature

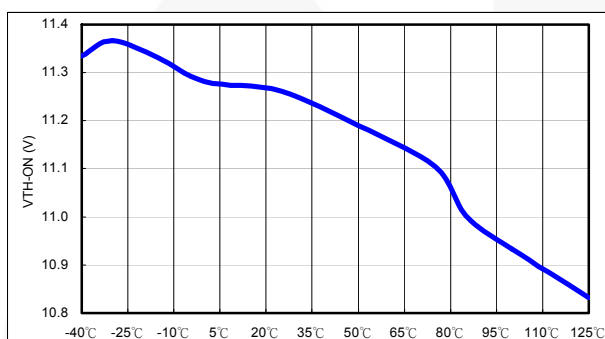


Figure 10.  $V_{TH-ON}$  vs. Temperature

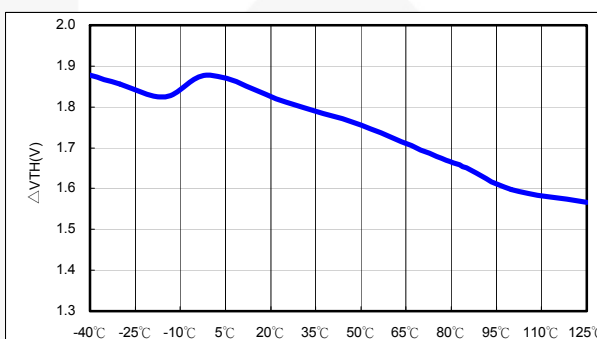


Figure 11.  $\Delta V_{TH}$  vs. Temperature

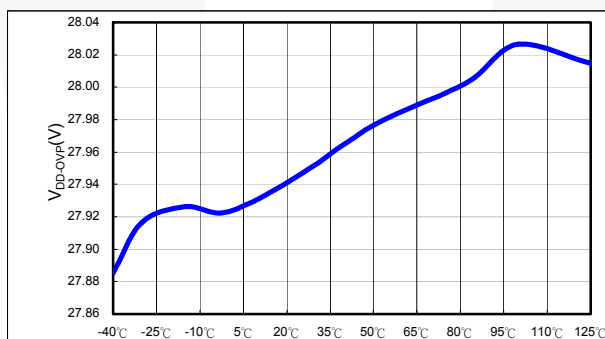


Figure 12.  $V_{DD-OVP}$  vs. Temperature

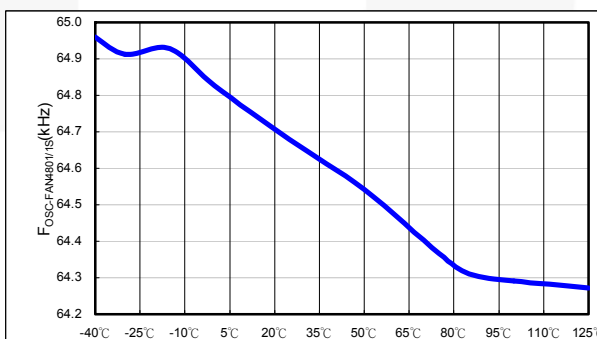


Figure 13.  $f_{OSC-FAN4801/1S}$  vs. Temperature

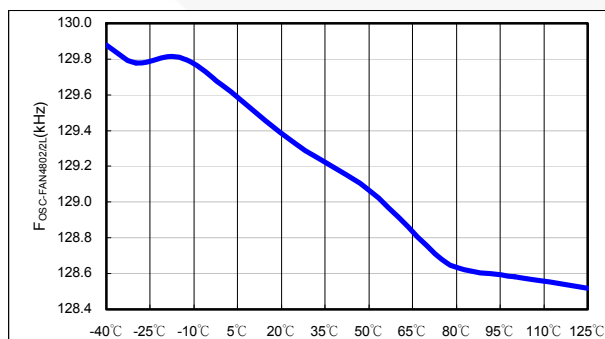


Figure 14.  $f_{OSC-FAN4802/2L}$  vs. Temperature

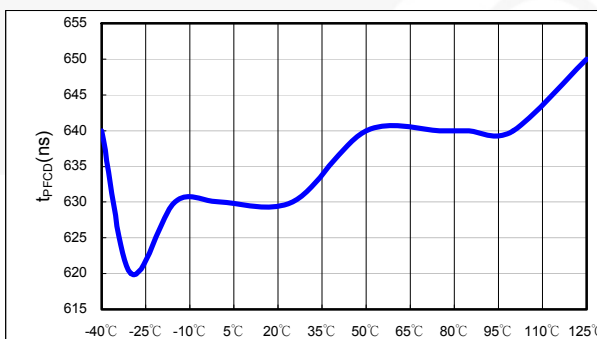


Figure 15.  $t_{PFC}$  vs. Temperature

## Typical Characteristics

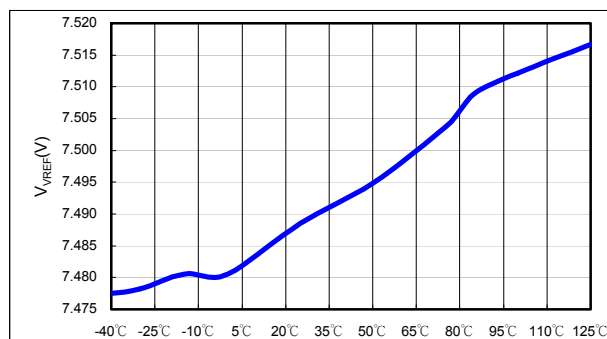


Figure 16. V<sub>VREF</sub> vs. Temperature

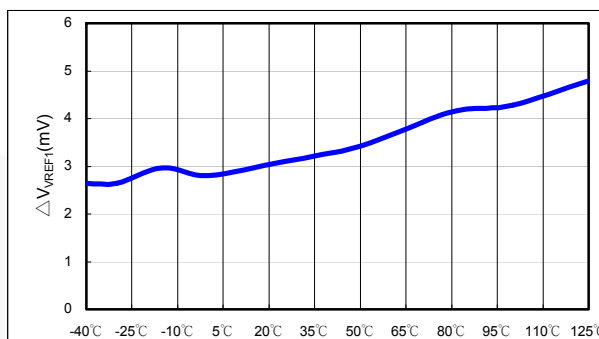


Figure 17. ΔV<sub>VREF1</sub> vs. Temperature

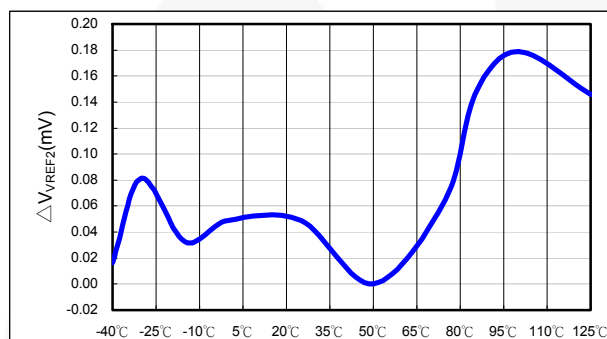


Figure 18. ΔV<sub>VREF2</sub> vs. Temperature

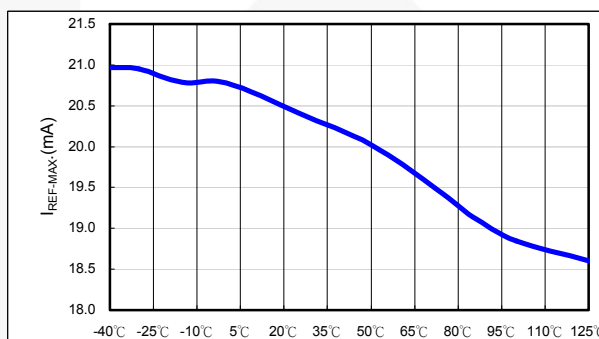


Figure 19. I<sub>REF-MAX</sub> vs. Temperature

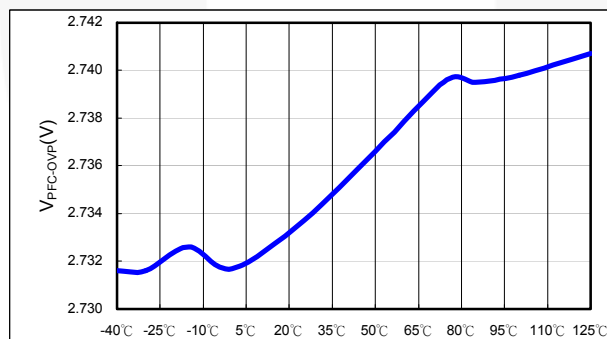


Figure 20. V<sub>PFC-OVP</sub> vs. Temperature

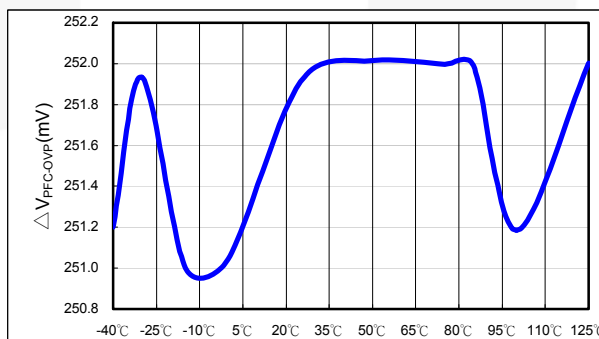


Figure 21. ΔV<sub>PFC-OVP</sub> vs. Temperature

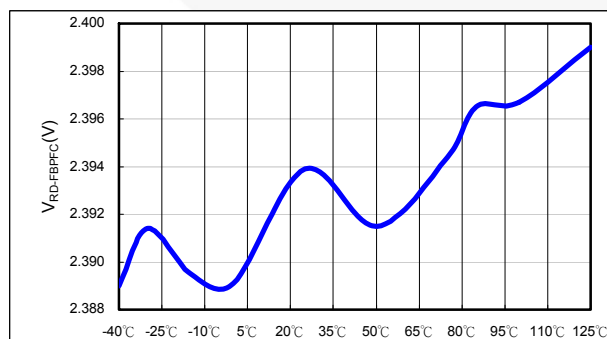


Figure 22. V<sub>RD-FBPFC</sub> vs. Temperature

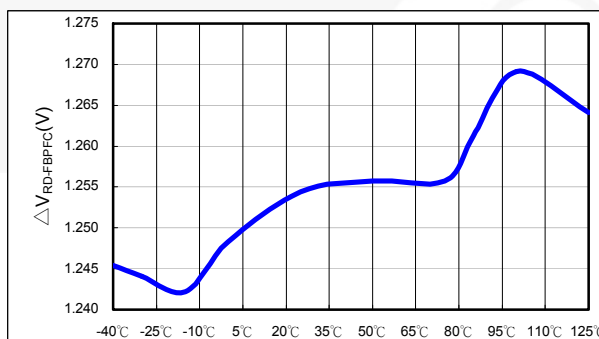


Figure 23. ΔV<sub>RD-FBPFC</sub> vs. Temperature

## Typical Characteristics

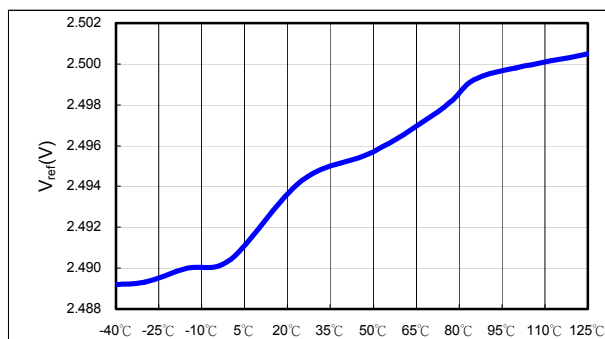


Figure 24.  $V_{ref}$  vs. Temperature

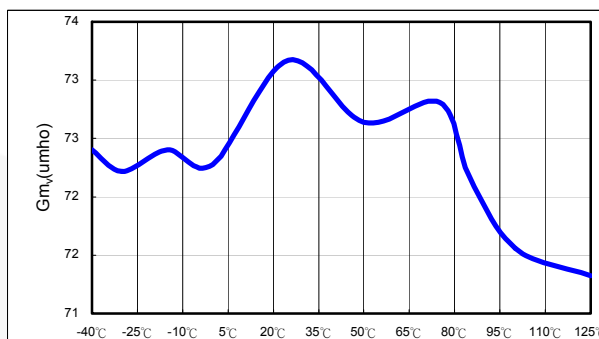


Figure 25.  $G_{mV}$  vs. Temperature

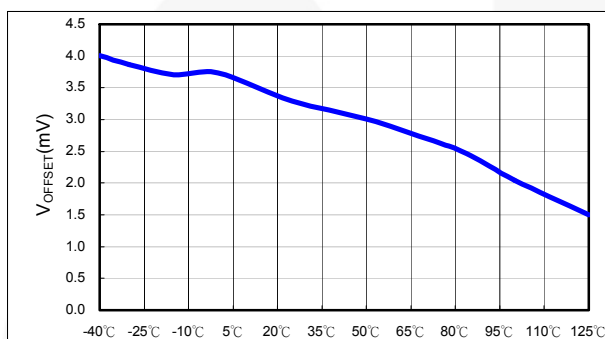


Figure 26.  $V_{OFFSET}$  vs. Temperature

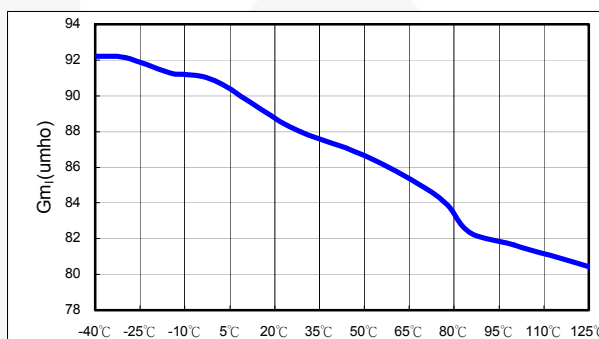


Figure 27.  $G_{mI}$  vs. Temperature

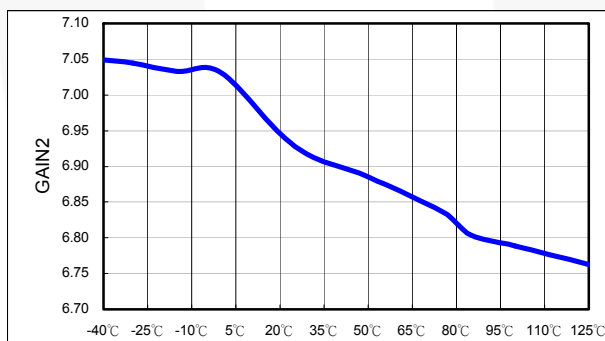


Figure 28.  $GAIN2$  vs. Temperature

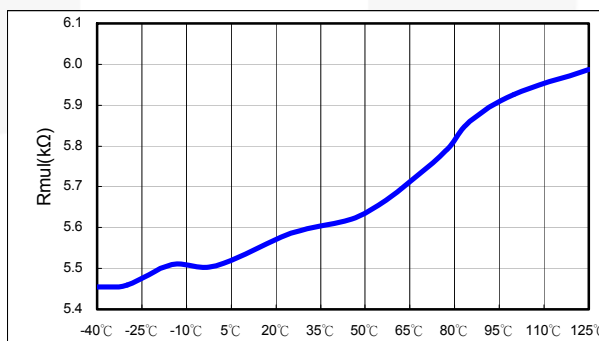


Figure 29.  $R_{mul}$  vs. Temperature

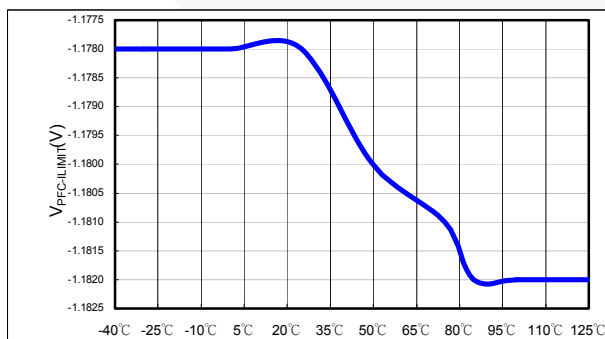


Figure 30.  $V_{PFC-LIMIT}$  vs. Temperature

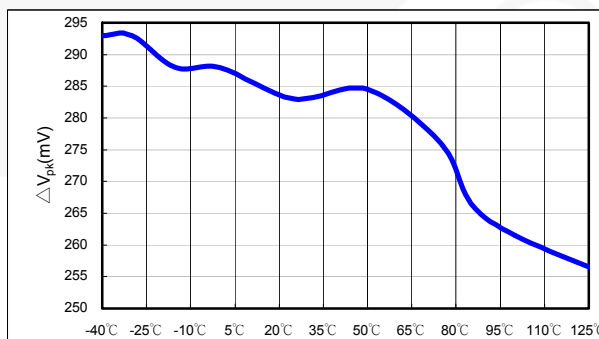


Figure 31.  $\Delta V_{pk}$  vs. Temperature

## Typical Characteristics

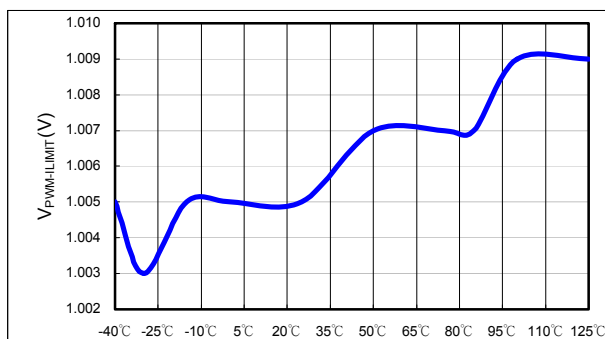


Figure 32.  $V_{PWM-ILIMIT}$  vs. Temperature

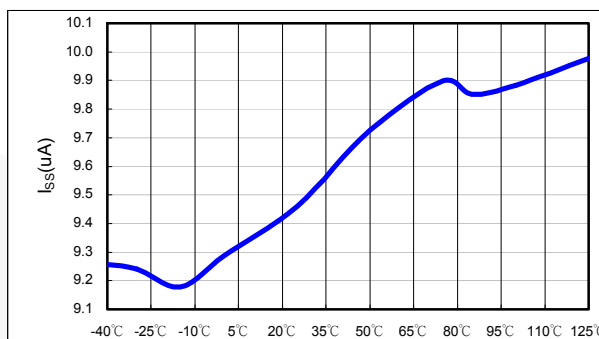


Figure 33.  $I_{SS}$  vs. Temperature

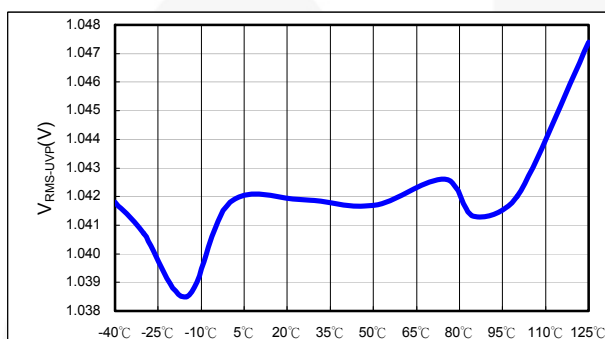


Figure 34.  $V_{RMS-UVF}$  vs. Temperature

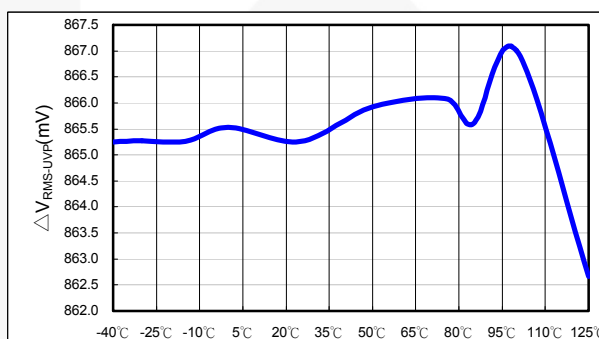


Figure 35.  $\Delta V_{RMS-UVF}$  vs. Temperature

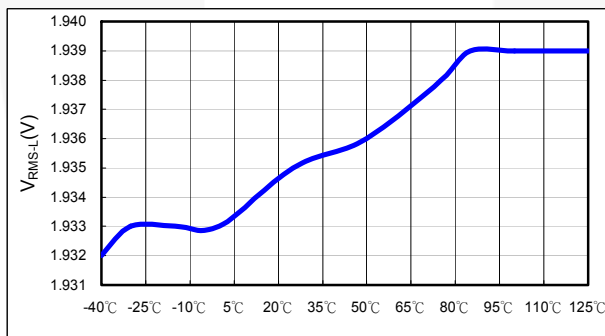


Figure 36.  $V_{RMS-L}$  vs. Temperature

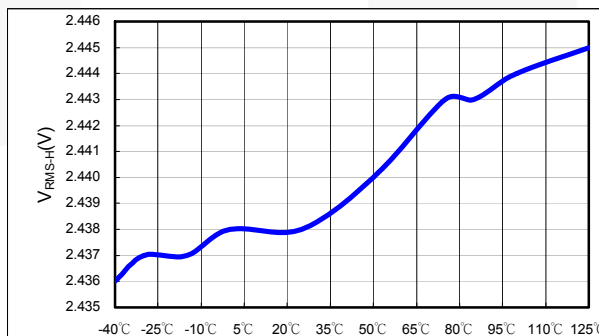


Figure 37.  $V_{RMS-H}$  vs. Temperature

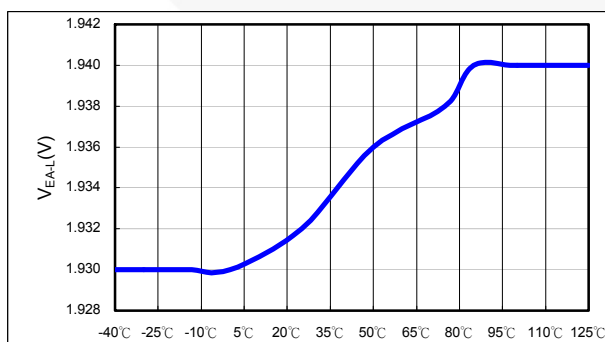


Figure 38.  $V_{EA-L}$  vs. Temperature

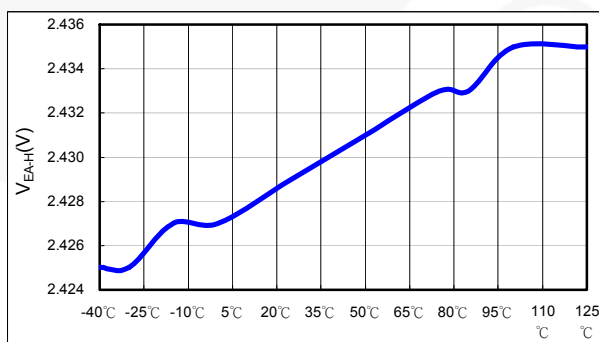


Figure 39.  $V_{EA-H}$  vs. Temperature



## Typical Characteristics

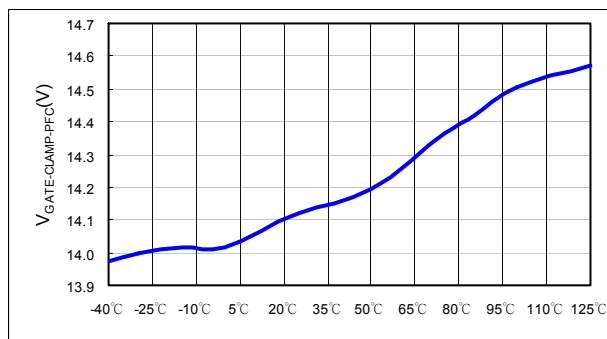


Figure 40. V<sub>GATE-CLAMP-PFC</sub> vs. Temperature

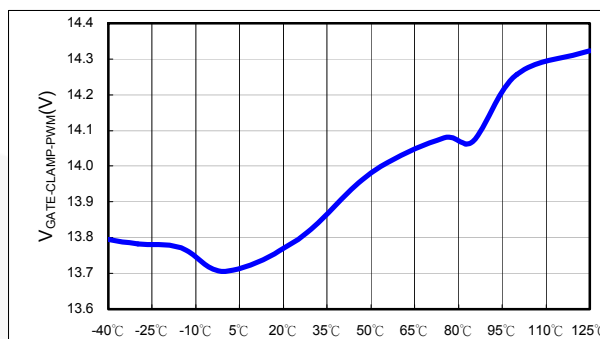


Figure 41. V<sub>GATE-CLAMP-PWM</sub> vs. Temperature

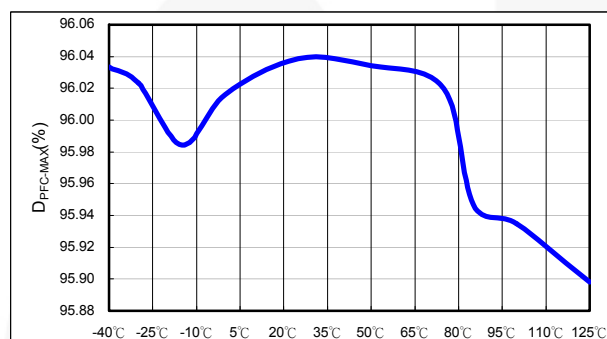


Figure 42. D<sub>PFC-MAX</sub> vs. Temperature

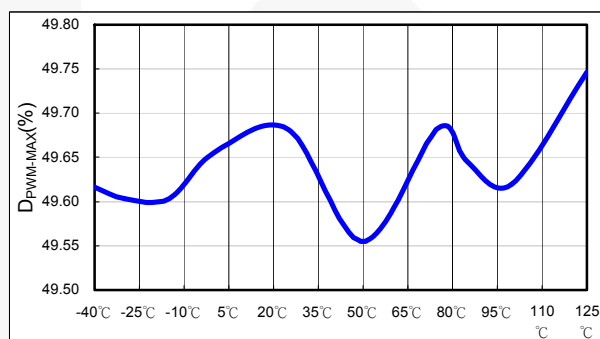


Figure 43. D<sub>PWM-MAX</sub> vs. Temperature

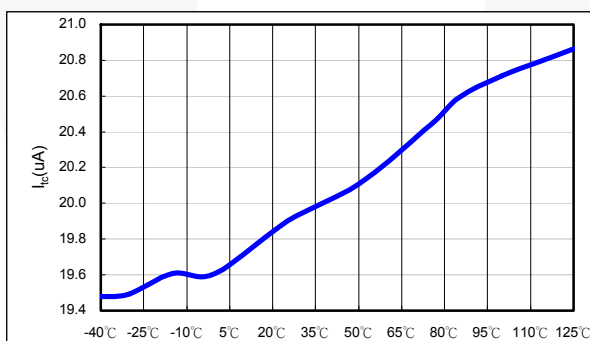


Figure 44. I<sub>IC</sub> vs. Temperature

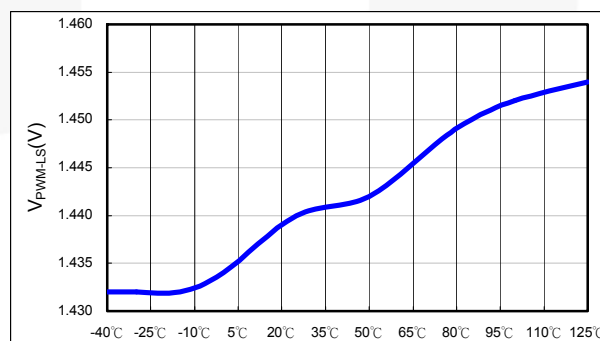


Figure 45. V<sub>PWM-LS</sub> vs. Temperature

## Functional Description

The FAN4800A/C and FAN4801/02/02L consist of an average current controlled, continuous boost Power Factor Correction (PFC) front-end and a synchronized Pulse Width Modulator (PWM) back-end. The PWM can be used in current or voltage mode. In voltage mode, feed forward from the PFC output bus can be used to improve the line regulation of PWM. In either mode, the PWM stage uses conventional trailing-edge, duty-cycle modulation. This proprietary leading/trailing edge modulation results in a higher usable PFC error amplifier bandwidth and can significantly reduce the size of the PFC DC bus capacitor.

The synchronization of the PWM with the PFC simplifies the PWM compensation due to the controlled ripple on the PFC output capacitor (the PWM input capacitor). The PWM section of the FAN4800A, FAN4801/1S operates at the same frequency as the PFC; and FAN4800C, FAN4802/2L operates at double with PFC.

In addition to power factor correction, a number of protection features are built into this series. They include soft-start, PFC over-voltage protection, peak current limiting, brownout protection, duty cycle limiting, and under-voltage lockout (UVLO).

### Gain Modulator

The gain modulator is the heart of the PFC, as the circuit block controls the response of the current loop to line voltage waveform and frequency, RMS line voltage, and PFC output voltages. There are three inputs to the gain modulator:

1. A current representing the instantaneous input voltage (amplitude and wave shape) to the PFC. The rectified AC input sine wave is converted to a proportional current via a resistor and is fed into the gain modulator at IAC. Sampling current in this way minimizes ground noise, required in high-power, switching-power conversion environments. The gain modulator responds linearly to this current.
2. A voltage proportional to the long-term RMS AC line voltage, derived from the rectified line voltage after scaling and filtering. This signal is presented to the gain modulator at VRMS. The output of the gain modulator is inversely proportional to VRMS (except at unusually low values of VRMS, where special gain contouring takes over to limit power dissipation of the circuit components under brownout conditions).
3. The output of the voltage error amplifier, VEA. The gain modulator responds linearly to variations in this voltage.

The output of the gain modulator is a current signal, in the form of a full wave rectified sinusoid at twice the line frequency. This current is applied to the virtual ground (negative) input of the current error amplifier. In this way, the gain modulator forms the reference for the current error loop and ultimately controls the instantaneous current draw of the PFC from the power line. The general form of the output of the gain modulator is:

$$I_{\text{GAINMOD}} = \frac{I_{\text{AC}} \times (\text{VEA} - 0.7)}{V_{\text{RMS}}^2} \times K \quad (1)$$

Note that the output current of the gain modulator is limited around 159μA and the maximum output voltage of the gain modulator is limited to 159μA × 5.7K = 0.906V. This 0.906V also determines the maximum input power.

However,  $I_{\text{GAINMOD}}$  cannot be measured directly from ISENSE.  $\text{ISENSE} = I_{\text{GAINMOD}} - I_{\text{OFFSET}}$  and  $I_{\text{OFFSET}}$  can only be measured when VEA is less than 0.5V and  $I_{\text{GAINMOD}}$  is 0A. Typical  $I_{\text{OFFSET}}$  is around 31μA ~ 48μA.

### Selecting $R_{\text{AC}}$ for IAC Pin

The IAC pin is the input of the gain modulator and also a current mirror input and requires current input. Selecting a proper resistor  $R_{\text{AC}}$  provides a good sine wave current derived from the line voltage and helps program the maximum input power and minimum input line voltage.  $R_{\text{AC}} = V_{\text{IN peak}} \times 56\text{K}\Omega$ . For example, if the minimum line voltage is 75V<sub>AC</sub>, the  $R_{\text{AC}} = 75 \times 1.414 \times 56\text{K}\Omega = 6\text{M}\Omega$ .

### Current Amplifier Error, IEA

The current error amplifier's output controls the PFC duty cycle to keep the average current through the boost inductor a linear function of the line voltage. At the inverting input to the current error amplifier, the output current of the gain modulator is summed with a current, which results in a negative voltage being impressed upon the ISENSE pin.

The negative voltage on ISENSE represents the sum of all currents flowing in the PFC circuit and is typically derived from a current sense resistor in series with the negative terminal of the input bridge rectifier.

The inverting input of the current error amplifier is a virtual ground. Given this fact, and the arrangement of the duty cycle modulator polarities internal to the PFC, an increase in positive current from the gain modulator causes the output stage to increase its duty cycle until the voltage on ISENSE is adequately negative to cancel this increased current. Similarly, if the gain modulator's output decreases, the output duty cycle decreases to achieve a less negative voltage on the ISENSE pin.

### PFC Cycle-By-Cycle Current Limiter

As well as being a part of the current feedback loop, the ISENSE pin is a direct input to the cycle-by-cycle current limiter for the PFC section. If the input voltage at this pin is less than -1.15V, the output of the PFC is disabled until the protection flip-flop is reset by the clock pulse at the start of the next PFC power cycle.



## Two-Level PFC Function

To improve the efficiency, the system can reduce PFC switching loss at low line and light load by reducing the PFC output voltage. The two-level PFC output of FAN4801/02/02L can be programmable.

As Figure 47 shows, FAN4801/02/02L detect VEA pin and VRMS pin to determine the system operates low line and light load or not. At the second-level PFC, there is a current of 20μA through  $R_{F2}$  from FBPFC pin. So the second-level PFC output voltage can be calculated as.

$$\text{Output} \cong \frac{R_{F1} + R_{F2}}{R_{F2}} \times (2.5V - 20\mu A \times R_{F2}) \quad (3)$$

For example, if the second-level PFC output voltage is expected as 300V and normal voltage is 387V, according to the equation,  $R_{F2}$  is 28kΩ  $R_{F1}$  is 4.3MΩ.

The programmable range of second level PFC output voltage is 340V ~ 300V.

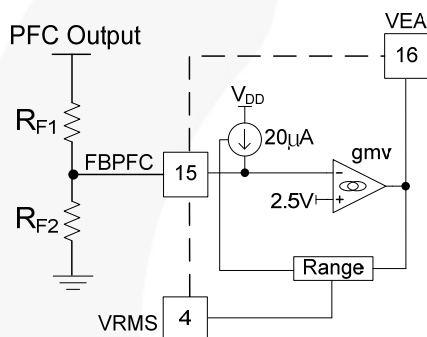


Figure 47. Two-Level PFC Scheme

## Oscillator ( $R_T/C_T$ )

The oscillator frequency is determined by the values of  $R_T$  and  $C_T$ , which determine the ramp and off-time of the oscillator output clock:

$$f_{RT/CT} = \frac{1}{t_{RT/CT} + t_{DEAD}} \quad (4)$$

The dead time of the oscillator is derived from the following equation:

$$t_{RT/CT} = C_T \times R_T \times \ln\left(\frac{V_{REF} - 1}{V_{REF} - 3.8}\right) \quad (5)$$

at  $V_{REF}=7.5V$  and  $t_{RT/CT}=C_T \times R_T \times 0.56$ .

The dead time of the oscillator is determined using:

$$t_{DEAD} = \frac{2.8V}{7.78mA} \times C_T = 360 \times C_T \quad (6)$$

The dead time is so small ( $t_{RT/CT} \gg t_{DEAD}$ ) that the operating frequency can typically be approximated by:

$$f_{RT/CT} = \frac{1}{t_{RT/CT}} \quad (7)$$

## Pulse Width Modulator (PWM)

The operation of the PWM section is straightforward, but there are several points that should be noted. Foremost among these is the inherent synchronization of PWM with the PFC section of the device, from which it also derives its basic timing. The PWM is capable of current-mode or voltage-mode operation. In current-mode applications, the PWM ramp (RAMP) is usually derived directly from a current sensing resistor or current transformer in the primary of the output stage. It is thereby representative of the current flowing in the converter's output stage.  $I_{LIMIT}$ , which provides cycle-by-cycle current limiting, is typically connected to RAMP in such applications. For voltage-mode operation and certain specialized applications, RAMP can be connected to a separate RC timing network to generate a voltage ramp against which FBPWM is compared. Under these conditions, the use of voltage feed-forward from the PFC bus can assist in line regulation accuracy and response. As in current-mode operation, the  $I_{LIMIT}$  input is used for output stage over-current protection. No voltage error amplifier is included in the PWM stage, as this function is generally performed on the output side of the PWM's isolation boundary. To facilitate the design of opto-coupler feedback circuitry, an offset has been built into the PWM's RAMP input that allows FBPWM to command a 0% duty cycle for input voltages below typical 1.5V.

## PWM Cycle-By-Cycle Current Limiter

The  $I_{LIMIT}$  pin is a direct input to the cycle-by-cycle current limiter for the PWM section. Should the input voltage at this pin ever exceed 1V, the output flip-flop is reset by the clock pulse at the start of the next PWM power cycle. When the  $I_{LIMIT}$  triggers the cycle-by-cycle bi-cycle current, it limits the PWM duty cycle mode and the power dissipation is reduced during the dead-short condition.

## $V_{IN}$ OK Comparator

The  $V_{IN}$  OK comparator monitors the DC output of the PFC and inhibits the PWM if the voltage on FBPFC is less than its nominal 2.4V. Once the voltage reaches 2.4V, which corresponds to the PFC output capacitor being charged to its rated boost voltage, the soft-start begins.

## PWM Soft-Start (SS)

PWM startup is controlled by selection of the external capacitor at soft-start. A current source of 10μA supplies the charging current for the capacitor and startup of the PWM begins at 1.5V.

## PWM Control (RAMP)

When the PWM section is used in current mode, RAMP is generally used as the sampling point for a voltage, representing the current in the primary of the PWM's output transformer. The voltage is derived either from a current sensing resistor or a current transformer. In voltage mode, RAMP is the input for a ramp voltage generated by a second set of timing components ( $R_{RAMP}$ ,  $C_{RAMP}$ ) that have a minimum value of 0V and a peak value of approximately 6V. In voltage mode, feed forward from the PFC output bus is an excellent way to derive the timing ramp for the PWM stage.

## Generating $V_{DD}$


After turning on the FAN4800A/C, FAN4801/02/02L at 11V, the operating voltage can vary from 9.3V to 28V. The threshold voltage of the  $V_{DD}$  OVP comparator is 28V and its hysteresis is 1V. When  $V_{DD}$  reaches 28V, OPFC is LOW, and the PWM section is not disturbed. There are two ways to generate  $V_{DD}$ : use auxiliary power supply around 15V or use bootstrap winding to self-bias the FAN4800A/C, FAN4801/02/02L system. The bootstrap winding can be tapped from the PFC boost choke or the transformer of the DC-to-DC stage.

## Leading/Trailing Modulation

Conventional PWM techniques employ trailing-edge modulation, in which the switch turns on right after the trailing edge of the system clock. The error amplifier output is then compared with the modulating ramp up. The effective duty cycle of the trailing edge modulation is determined during the on-time of the switch.

In the case of leading-edge modulation, the switch is turned off exactly at the leading edge of the system clock. When the modulating ramp reaches the level of the error amplifier output voltage, the switch is turned on. The effective duty-cycle of the leading-edge modulation is determined during off-time of the switch.

## Physical Dimensions

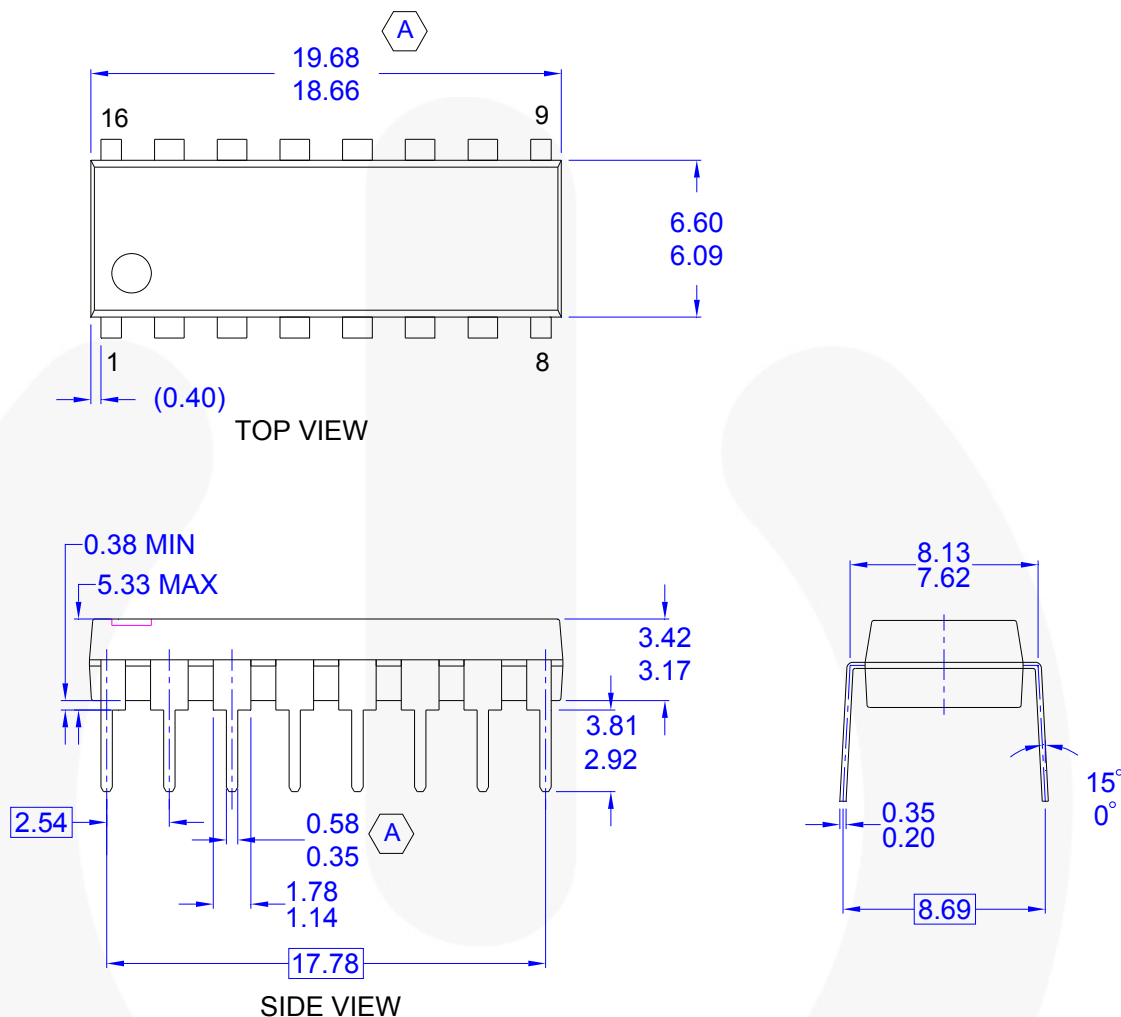

## NOTES: UNLESS OTHERWISE SPECIFIED

- A) THIS PACKAGE CONFORMS TO JEDEC MS-001 VARIATION BB
- B) ALL DIMENSIONS ARE IN MILLIMETERS.
- C) DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR PROTRUSIONS
- D) CONFORMS TO ASME Y14.5M-1994
- E) DRAWING FILE NAME: N16EREV1

Figure 48. 16-Pin Dual In-Line Package (DIP)

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:

<http://www.fairchildsemi.com/packaging/>.

## Physical Dimensions (Continued)

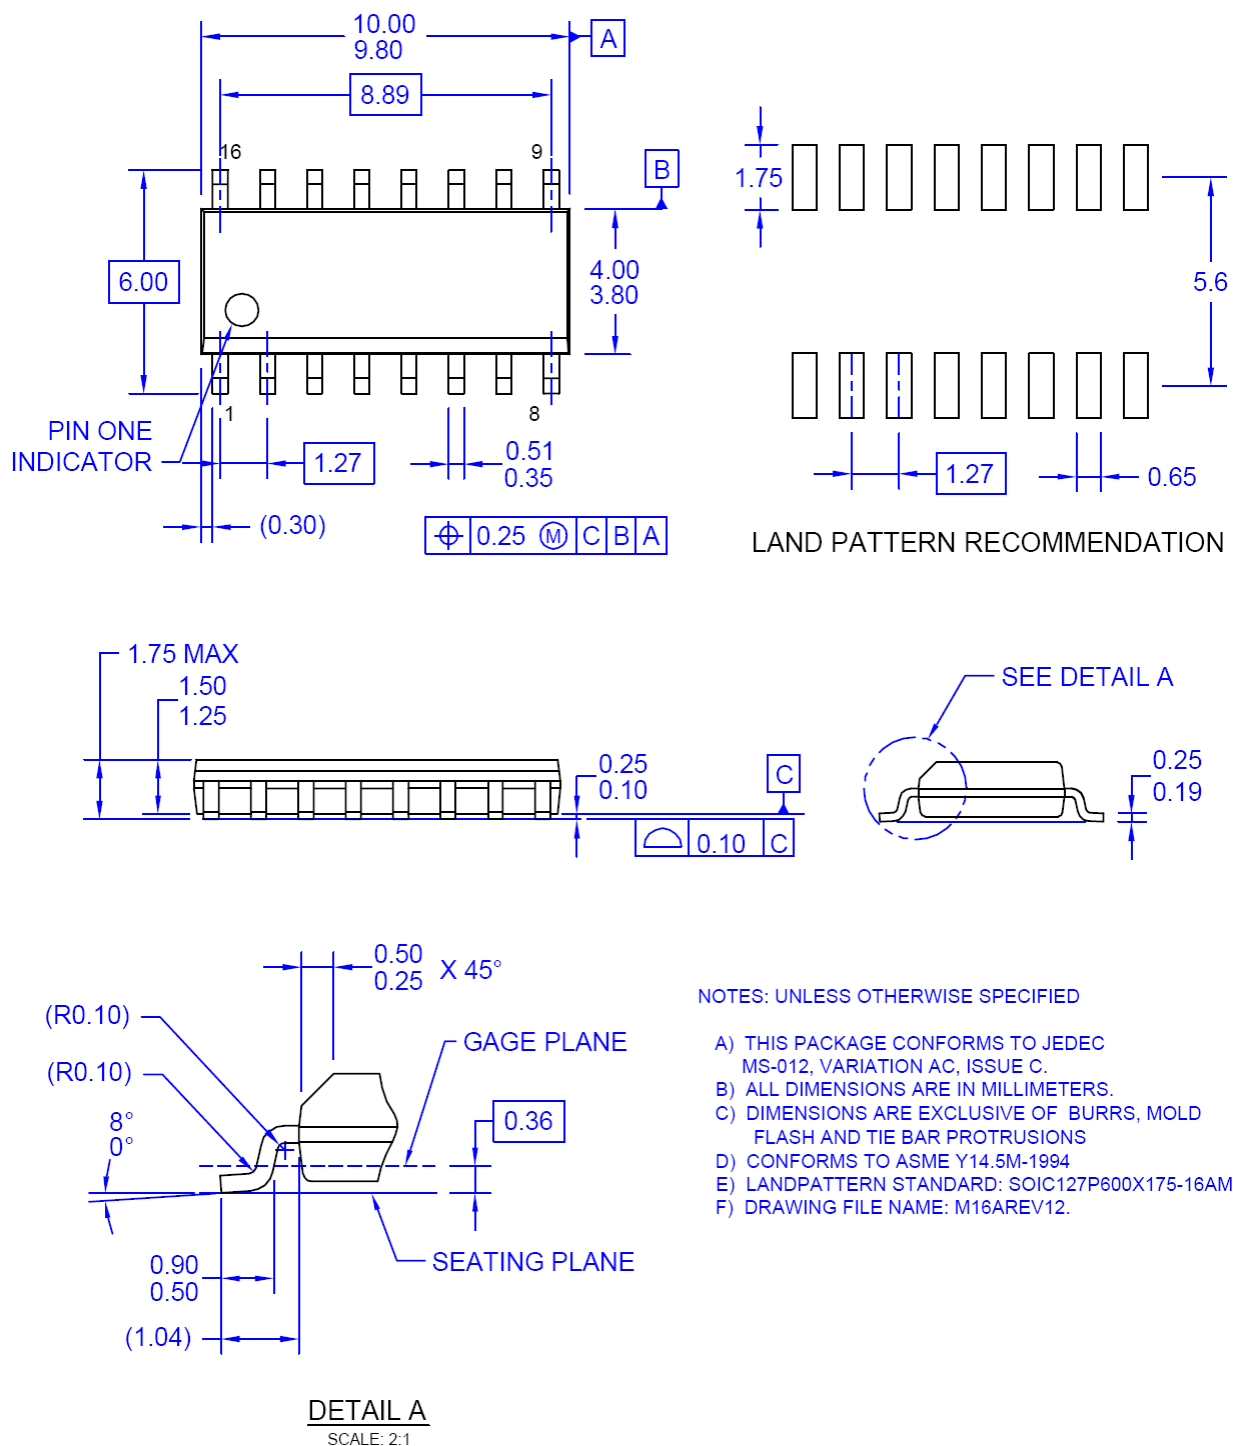


Figure 49. 16-Pin Small Outline Package (SOIC)

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:  
<http://www.fairchildsemi.com/packaging/>





## TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

AccuPower™  
Auto-SPM™  
AX-CAP™  
Build it Now™  
CorePLUS™  
CorePOWER™  
CROSSVOL™  
CTL™  
Current Transfer Logic™  
DEUXPEED®  
Dual Cool™  
EcoSPARK®  
EfficientMax™  
ESBCT™  
F®  
Fairchild®  
Fairchild Semiconductor®  
FACT Quiet Series™  
FACT®  
FAST®  
FastvCore™  
FETBench™  
FlashWriter®  
FPS™

F-PFS™  
FRFET®  
Global Power Resource®  
Green FPST™  
Green FPST™ e-Series™  
Gmax™  
GTO™  
IntelliMAX™  
ISOPLANAR™  
MegaBuck™  
MICROCOUPLER™  
MicroFET™  
MicroPak™  
MicroPak2™  
MillerDrive™  
MotionMax™  
Motion-SPM™  
mWSaver™  
OptoHIT™  
OPTOLOGIC®  
OPTOPLANAR®  
PDP SPM™

Power-SPM™  
PowerTrench®  
PowerXS™  
Programmable Active Droop™  
QFET®  
QST™  
Quiet Series™  
RapidConfigure™  
Saving our world, 1mW/kW at a time™  
SignalVise™  
SmartMax™  
SMART START™  
SPM®  
STEALTH™  
SuperFET®  
SuperSOT™.3  
SuperSOT™.8  
SuperSOT™.8  
SupreMOS®  
SyncFET™  
Sync-Lock™  
SYSTEM GENERAL®

The Power Franchise®  
The Right Technology for Your Success™  
the power franchise  
TinyBoost™  
TinyBuck™  
TinyCalc™  
TinyLogic®  
TINYOPTO™  
TinyPower™  
TinyPWM™  
TinyWire™  
TriFault Detect™  
TRUECURRENT™  
µSerDes™  
UHC®  
Ultra FRFET™  
UniFET™  
VCX™  
VisualMax™  
XS™

\* Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

## DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, [www.fairchildsemi.com](http://www.fairchildsemi.com), under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

## PRODUCT STATUS DEFINITIONS

### Definition of Terms

| Datasheet Identification | Product Status        | Definition                                                                                                                                                                                          |
|--------------------------|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Advance Information      | Formative / In Design | Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.                                                                       |
| Preliminary              | First Production      | Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design. |
| No Identification Needed | Full Production       | Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.                                               |
| Obsolete                 | Not In Production     | Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.                                                    |

Rev. 152





## О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

**Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.**

### **Наша компания это:**

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (XC), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

## Перечень производителей, продукцию которых мы поставляем на российский рынок





Trade Electronics.ru

гарантия бесперебойности производства и  
качества выпускаемой продукции

С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

<http://www.tradeelectronics.ru/>