

5 W MONO BTL AUDIO AMPLIFIER WITH DC VOLUME CONTROL

ILA7056B

The ILA7056B is a mono Bridge-Tied Load (BTL) output amplifier with DC volume control. It is designed for use in TV and monitors, but is also suitable for battery-fed portable recorders and radios. The device is contained in a 9-pin medium power package.

A Missing Current Limiter (MCL) is built in. The MCL circuit is activated when the difference in current between the output terminal of each amplifier exceeds 100 mA (300 mA typ.). This level of 100 mA allows for headphone applications (single-ended).

FEATURES

- DC volume control
- Few external components
- Mute mode
- Thermal protection
- Short-circuit proof
- No switch-on and switch-off clicks
- Good overall stability
- Low power consumption
- Low HF radiation
- ESD protected on all pins

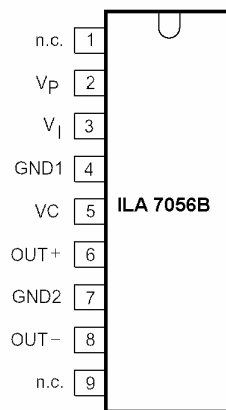


Figure 1. Pin connection

ORDERING INFORMATION

Plastic SIL-9MPF
(SOT110-1)

$T_A = -40^{\circ}\text{C}$ to 125°C

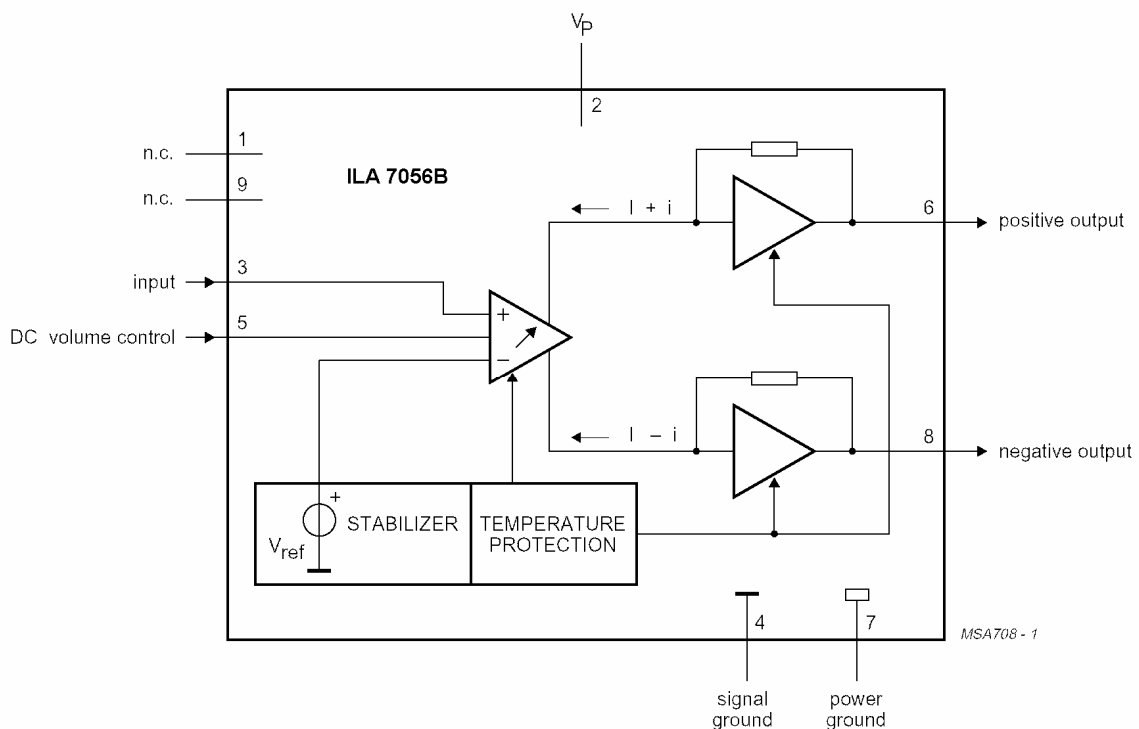


Figure 2. Simplified Block Diagram

MAXIMUM RATINGS

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNIT
V_P	supply voltage		-	18	V
$V_{3,5}$	input voltage pins 3 and 5		-	5	V
I_{ORM}	repetitive peak output current		-	1.25	A
I_{OSM}	non-repetitive peak output current		-	1.5	A
P_{tot}	total power dissipation	$T_{case} \leq 60^\circ\text{C}$	-	9	W
T_{amb}	operating ambient temperature		-40	+85	$^\circ\text{C}$
T_{stg}	storage temperature		-55	+150	$^\circ\text{C}$
T_{vj}	virtual junction temperature		-	+150	$^\circ\text{C}$
T_{sc}	short-circuit time		-	1	h

ELECTRICAL CHARACTERISTICS

$V_P = 12\text{ V}$; $V_{DC} = 1.4\text{ V}$; $f = 1\text{ kHz}$; $R_L = 16\ \Omega$; $T_{amb} = 25\ ^\circ\text{C}$; unless otherwise specified (see Fig.13).

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
Supply						
V_P	positive supply voltage		4.5	-	18	V
$I_{q(tot)}$	total quiescent current	note 1; $R_L = \infty$	-	9.2	13	mA
Maximum gain ($V_5 \geq 1.4\text{ V}$)						
P_O	output power	THD = 10%; $R_L = 16\ \Omega$	3	3.5	-	W
		THD = 10%; $R_L = 8\ \Omega$	-	5	-	W
THD	total harmonic distortion	$P_O = 0.5\text{ W}$	-	0.3	1	%
$G_{v(max)}$	maximum total voltage gain		39.5	40.5	41.5	dB
V_I	input signal handling (RMS value)	$G_{v(max)} = 0\text{ dB}$; THD $\leq 1\%$	1.0	-	-	V
V_{no}	noise output voltage (RMS value)	note 2; $f = 500\text{ kHz}$	-	210	-	μV
B	bandwidth	at -1dB	-	0.02 to 300	-	kHz
SVRR	supply voltage ripple rejection	note 3	34	38	-	dB
ΔV_O	DC output offset voltage	$ V_8 - V_6 $	-	0	200	mV
Z_I	input impedance (pin 3)		15	20	25	kHz
Mute position						
V_O	output voltage in mute position	note 4; $V_5 = 0.4\text{ V} \pm 30\text{ mV}$ $V_I = 1.0\text{ V}$	-	30	40	μV
DC volume control; note 5						
Φ	gain control		68	73.5	-	dB
I_5	control current	$V_5 = 0\text{ V}$	20	25	30	μA

Notes

1. With a load connected to the outputs the quiescent current will increase, the maximum value of this increase being equal to the DC output offset voltage divided by R_L .
2. The noise output voltage (RMS value) at $f = 500\text{ kHz}$ is measured with $R_S = 0\ \Omega$ and $B = 5\text{ kHz}$.
3. The ripple rejection is measured with $R_S = 0\ \Omega$ and $f = 100\text{ Hz}$ to 10 kHz . The ripple voltage V_R of 200 mV (RMS value) is applied to the positive supply rail.
4. The noise output voltage (RMS value) is measured with $R_S = 5\text{ k}\Omega$ unweighted.
5. The DC volume control can be configured in several ways. Two possible circuits are shown in Figs 14 and 15. The circuits at the volume control pin will influence the switch-on and switch-off behaviour and the maximum voltage gain.

FUNCTIONAL DESCRIPTION

The ILA7056B is a mono BTL output amplifier with DC volume control, designed for use in TV and monitor but is also suitable for battery-fed portable recorders and radios.

In conventional DC volume circuits the control or input stage is AC coupled to the output stage via external capacitors to keep the offset voltage low. In the ILA7056B the DC volume control stage is integrated into the input stage so that no coupling capacitors are required. With this configuration, a low offset voltage is still maintained and the minimum supply voltage remains low.

The BTL principle offers the following advantages:

- Lower peak value of the supply current
- The frequency of the ripple on the supply voltage is twice the signal frequency.

Consequently, a reduced power supply with smaller capacitors can be used which results in cost reductions. For portable applications there is a trend to decrease the supply voltage, resulting in a reduction of output power at conventional output stages. Using the BTL principle increases the output power.

The maximum gain of the amplifier is fixed at 40.5 dB. The DC volume control stage has a logarithmic control characteristic. Therefore, the total gain can be controlled from 40.5 dB to -33 dB. If the DC volume control voltage falls below 0.4 V, the device will switch to the mute mode.

The amplifier is short-circuit proof to ground, V_p and across the load. Also a thermal protection circuit is implemented. If the crystal temperature rises above +150°C the gain will be reduced, thereby reducing the output power. Special attention is given to switch-on and switch-off clicks, low HF radiation and a good overall stability.

Power dissipation

Assume $V_p = 12$ V; $R_L = 16$ Ω .

The maximum sine wave dissipation is = 1.8 W.

The $R_{th\ vj-a}$ of the package is 55 K/W.

Therefore $T_{amb\ (max)} = 150 - 55 \times 1.8 = 51^\circ\text{C}$.

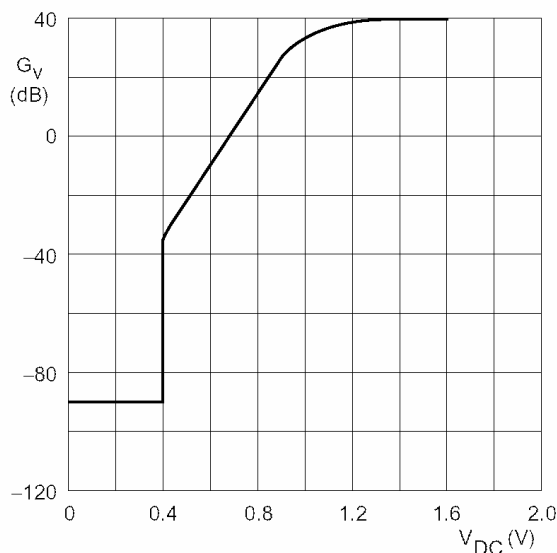


Figure 3. Gain control as a function of DC volume control.

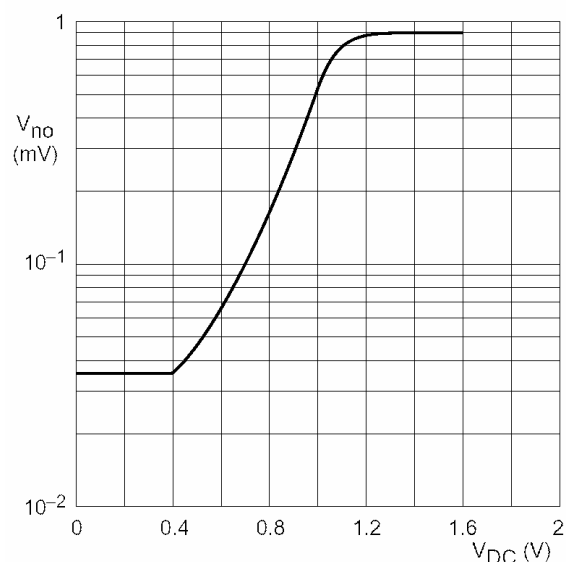


Figure 4. Noise output voltage as a function of DC volume control.

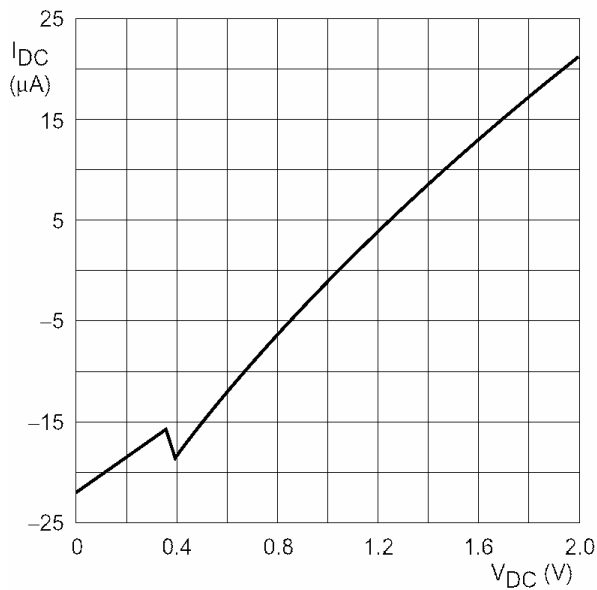


Figure 5. Control current as a function of DC volume control.

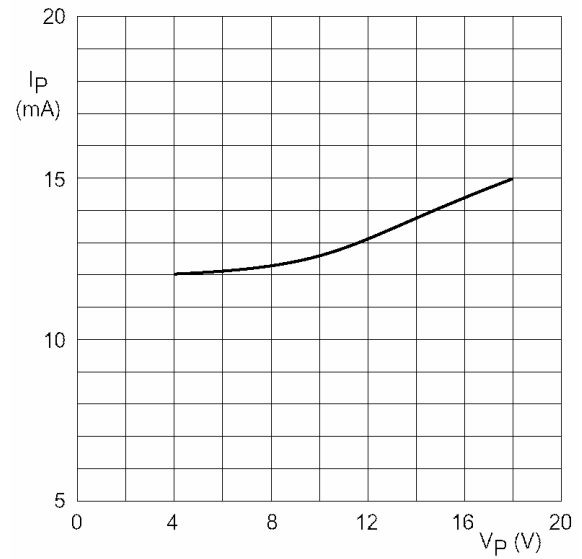


Figure 6. Quiescent current versus supply voltage.

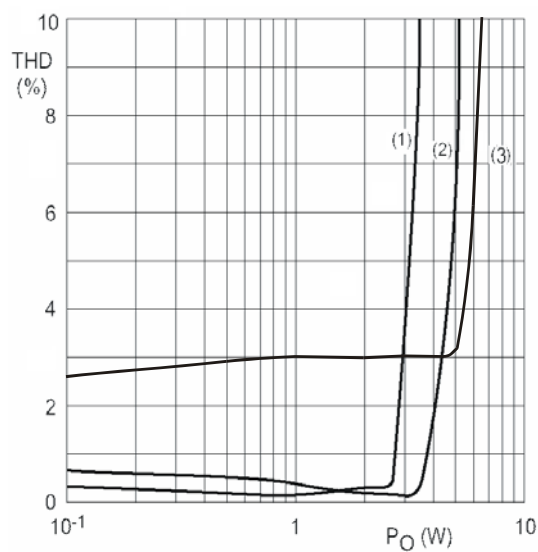


Figure 7. Total harmonic distortion versus output power.

- (1) $R_L = 16 \Omega$
- (2) $R_L = 8 \Omega$
- (3) $R_L = 4 \Omega, V_P = 12 V$

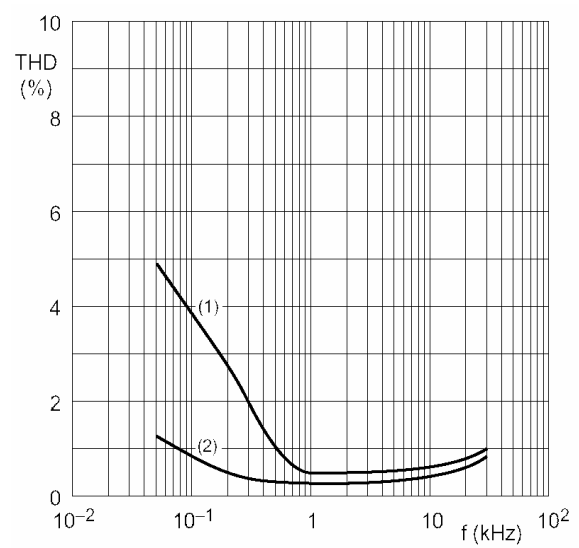


Figure 8. Total harmonic distortion versus frequency.

- $P_O = 0.1 W$.
- (1) $G_{v(max)} = 40 dB$.
- (2) $G_{v(max)} = 30 dB$.

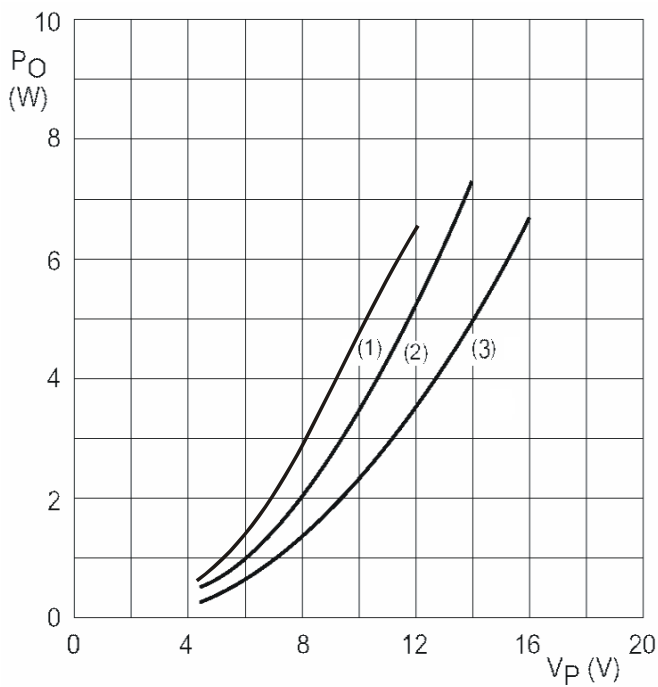


Figure 9. Output power versus supply voltage.

Measured at a THD of 10%. The maximum output power is limited by the maximum power dissipation and the maximum available output current.

- (1) $R_L = 4 \Omega$
- (2) $R_L = 8 \Omega$
- (3) $R_L = 16 \Omega$

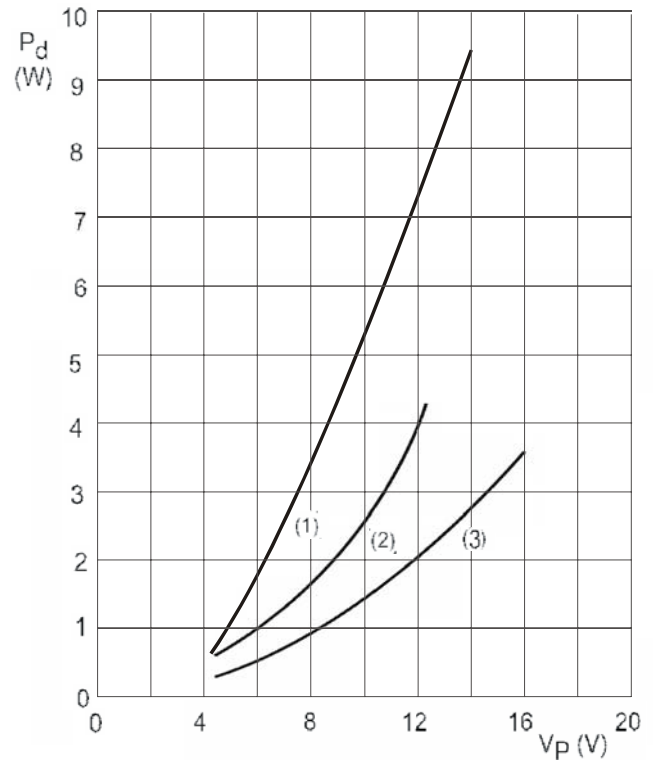


Figure 10. Total worst case power dissipation versus supply voltage.

- (1) $R_L = 4 \Omega$
- (2) $R_L = 8 \Omega$
- (3) $R_L = 16 \Omega$

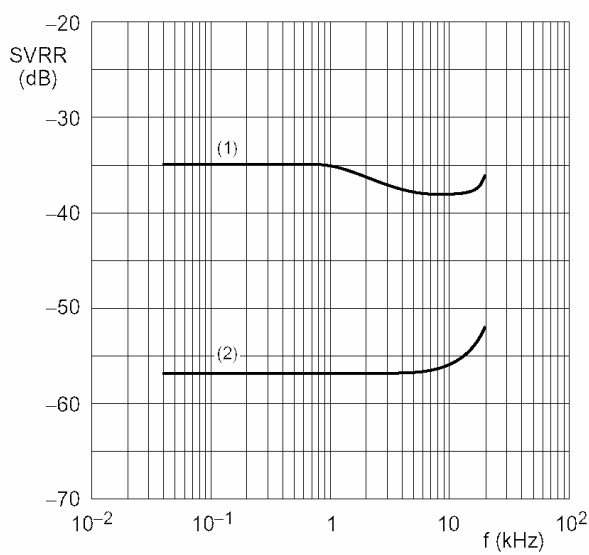


Fig.11 Supply voltage ripple rejection versus frequency.


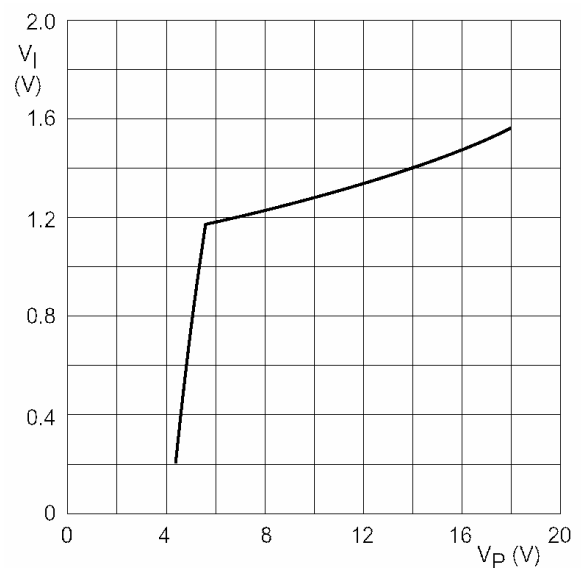


Fig.12 Input signal handling.

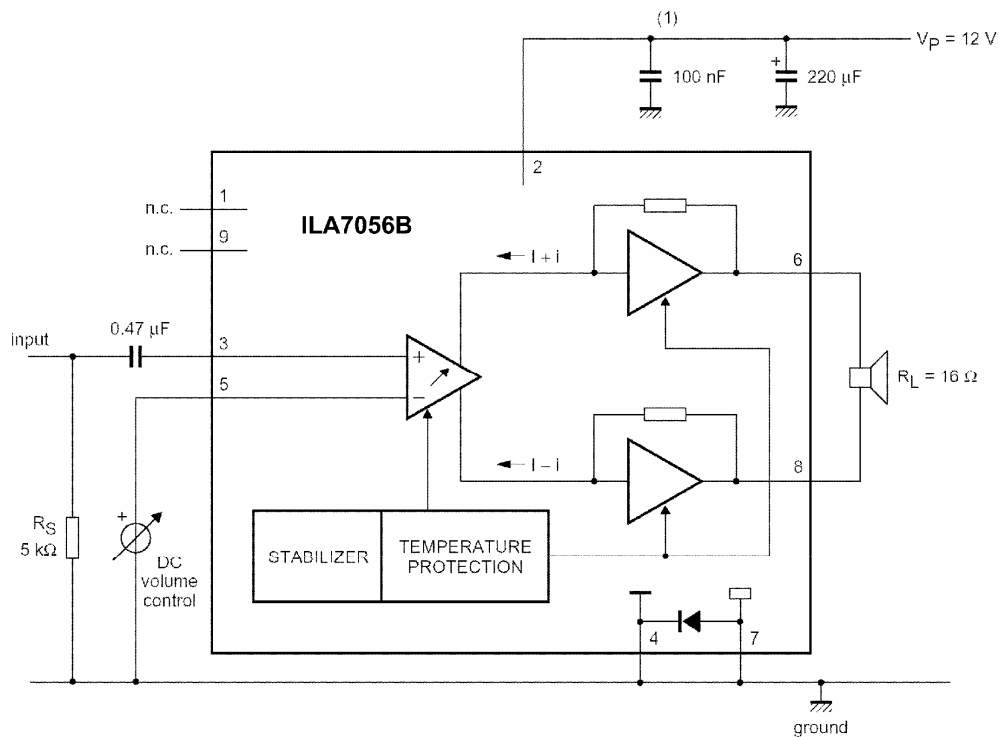

Test and application diagram

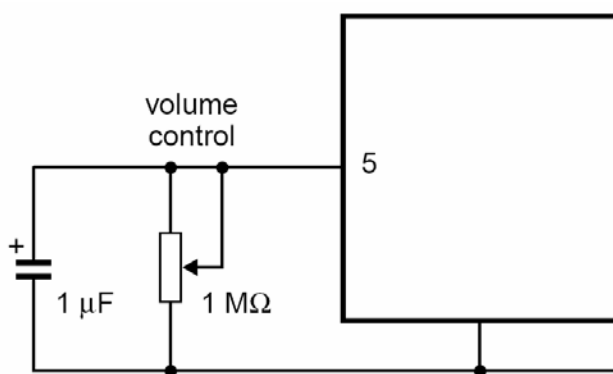


Fig.13 Application with potentiometer as volume control
Maximum gain = 34dB


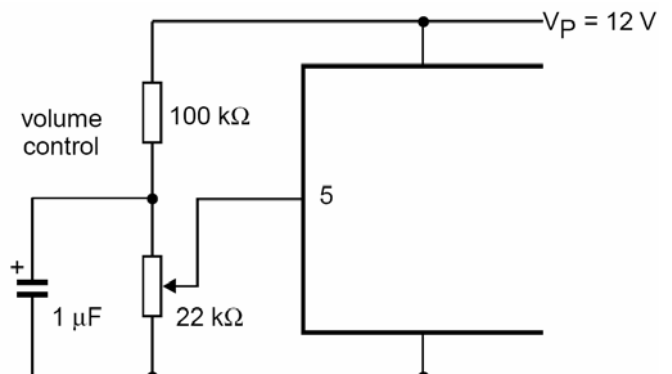


Fig.14 Application with potentiometer as volume control
Maximum gain = 40dB

- **9-Pin Plastic Power Single-in-Line (SIL-9MPF, SOT 110-1)**



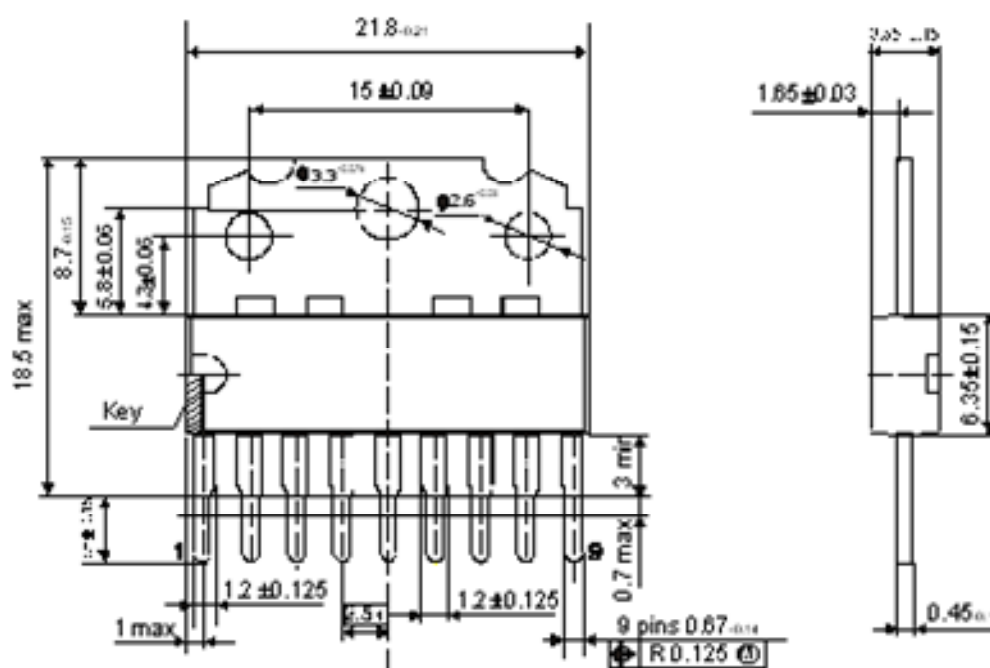

О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.

Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (XC), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

Перечень производителей, продукцию которых мы поставляем на российский рынок





Trade Electronics.ru

гарантия бесперебойности производства и
качества выпускаемой продукции

С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

<http://www.tradeelectronics.ru/>