

SANYO

No.2060A

2SB1142/2SD1682

PNP/NPN Epitaxial Planar Silicon Transistors

50V/2.5A High-Speed Switching Applications**Applications**

- Power supplies, relay drivers, lamp drivers.

Features

- Adoption of FBET, MBIT processes.
- Low saturation voltage.
- Large current capacity and Wide ASO.

(): 2SB1142

Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$

			unit
Collector-to-Base Voltage	V_{CBO}	(-)60	V
Collector-to-Emitter Voltage	V_{CEO}	(-)50	V
Emitter-to-Base Voltage	V_{EBO}	(-)6	V
Collector Current	I_C	(-)2.5	A
Collector Current (Pulse)	I_{CP}	(-)5.0	A
Collector Dissipation	P_C	1.5	W
		10	W
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-55 to +150	$^\circ\text{C}$

 $T_c = 25^\circ\text{C}$ **Electrical Characteristics at $T_a = 25^\circ\text{C}$**

			min	typ	max	unit
Collector Cutoff Current	I_{CBO}	$V_{CB} = (-)50\text{V}, I_E = 0$			(-)100	nA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = (-)4\text{V}, I_C = 0$			(-)100	nA
DC Current Gain	$h_{FE}(1)$	$V_{CE} = (-)2\text{V}, I_C = (-)100\text{mA}$	(100)※		(400)	
			100※		560	
	$h_{FE}(2)$	$V_{CE} = (-)2\text{V}, I_C = (-)2\text{A}$	35			
Gain-Bandwidth Product	f_T	$V_{CE} = (-)10\text{V}, I_C = (-)50\text{mA}$		140		MHz
C-E Saturation Voltage	$V_{CE(sat)}$	$I_C = (-)1\text{A}, I_B = (-)50\text{mA}$		(-250)	(-500)	mV
				110	300	mV
B-E Saturation Voltage	$V_{BE(sat)}$	$I_C = (-)1\text{A}, I_B = (-)50\text{mA}$		(-)0.85	(-)1.2	V
Output Capacitance	C_{ob}	$V_{CE} = (-)10\text{V}, f = 1\text{MHz}$		(25)16		pF


Continued on next page.

※: The 2SB1142/2SD1682 are classified by 100mA h_{FE} as follows

2SB1142	100 R 200	140 S 280	200 T 400	
2SD1682	100 R 200	140 S 280	200 T 400	280 U 560

Package Dimensions 2042A

(unit: mm)

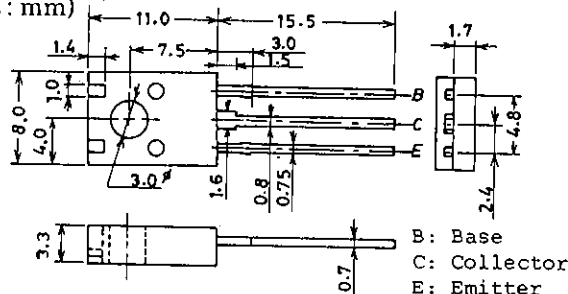

SANYO: TO126ML

SANYO Electric Co., Ltd. Semiconductor Business Headquarters






TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110 JAPAN

D151MH, (KOTO) No.2060-1/4









Continued from preceding page.





			min	typ	max	unit
C-B Breakdown Voltage	$V_{(BR)CBO}$	$I_C = (-)10\mu A, I_E = 0$	$(-)60$			V
C-E Breakdown Voltage	$V_{(BR)CEO}$	$I_C = (-)1mA, R_{BE} = \infty$	$(-)50$			V
E-B Breakdown Voltage	$V_{(BR)EBO}$	$I_E = (-)10\mu A, I_C = 0$	$(-)6$			V
Turn-on Time	t_{on}	See specified Test Circuit.		(35)35		ns
Storage Time	t_{stg}	"		(350)550		ns
Fall Time	t_f	"		(30)30		ns

Switching Time Test Circuit

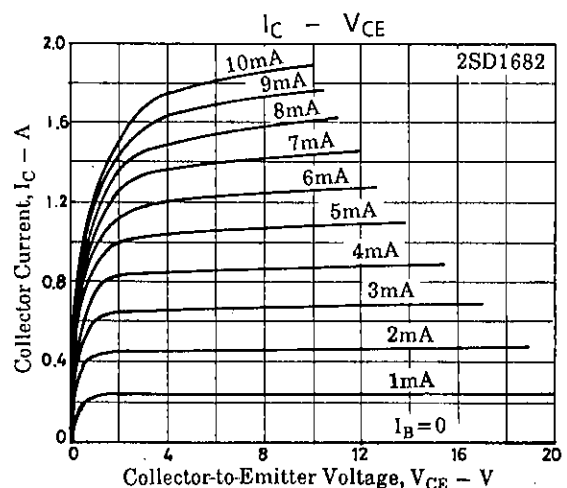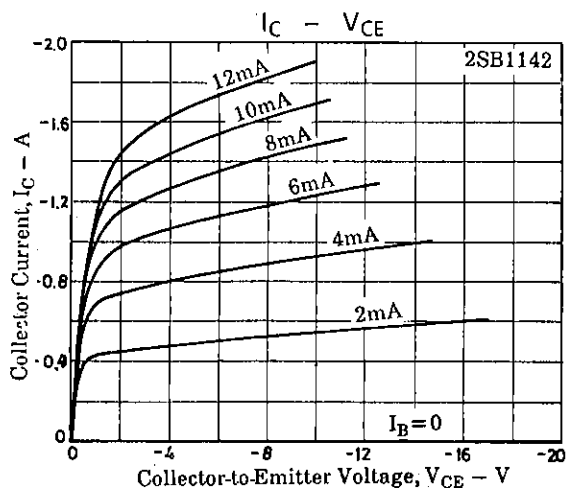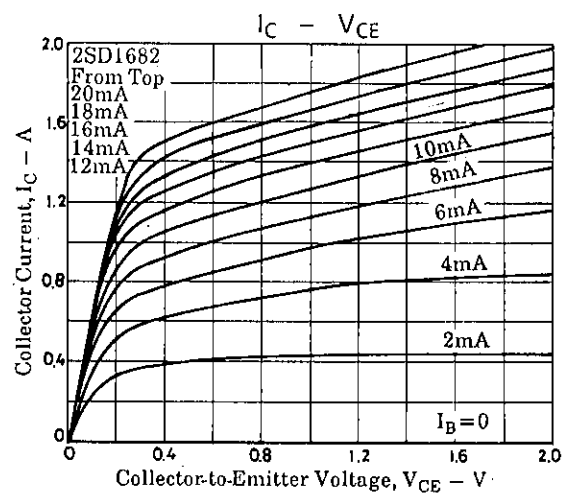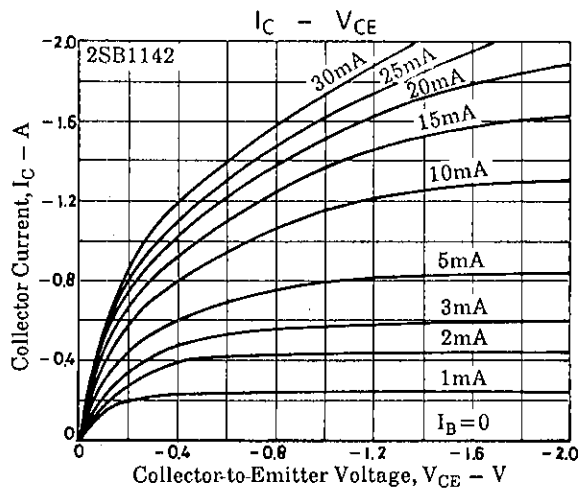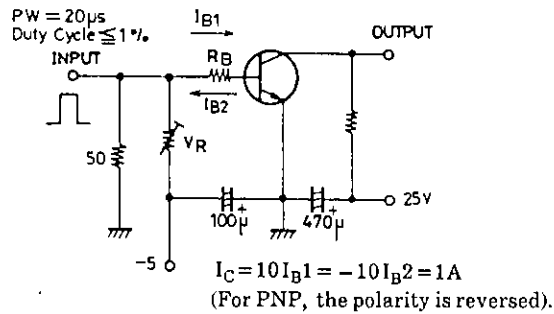

2SB1142/2SD1682

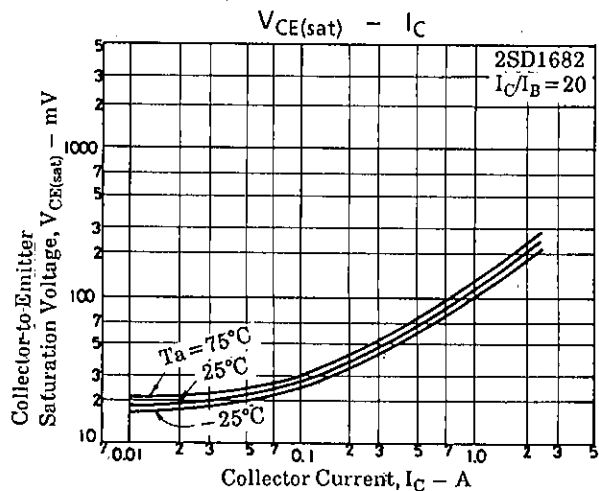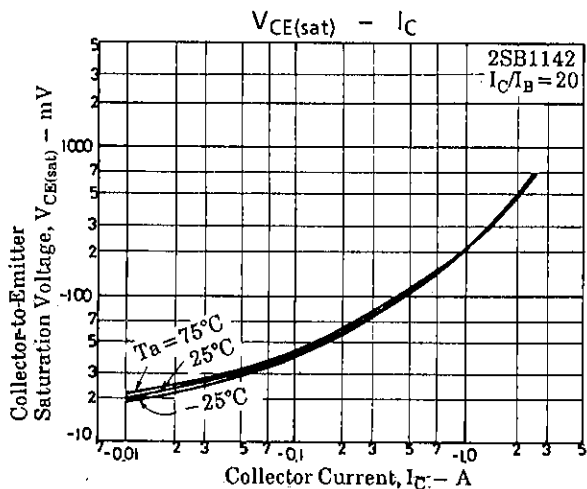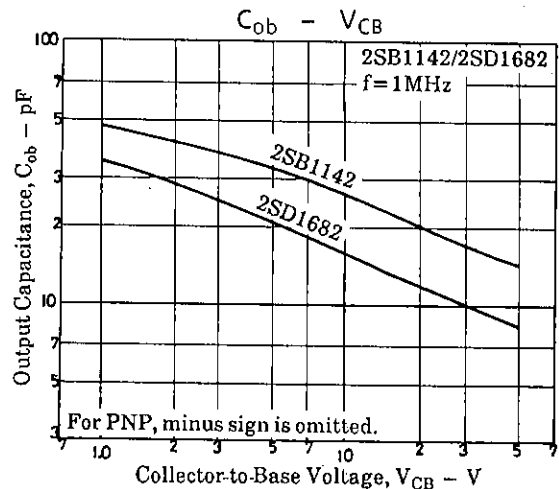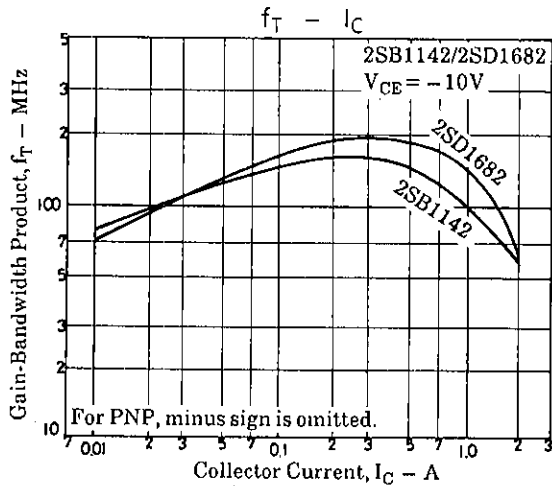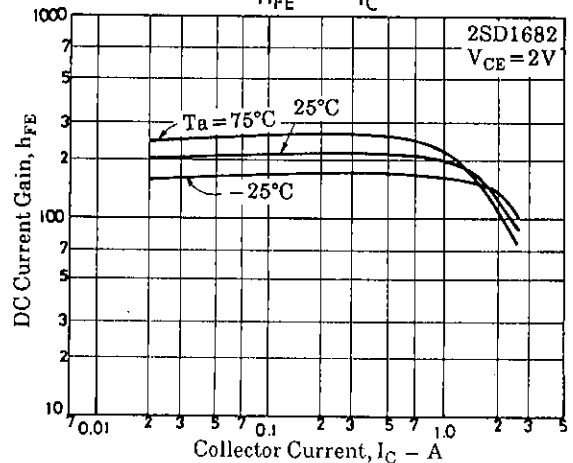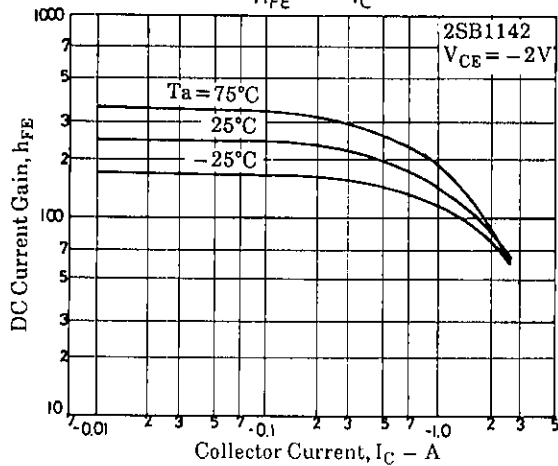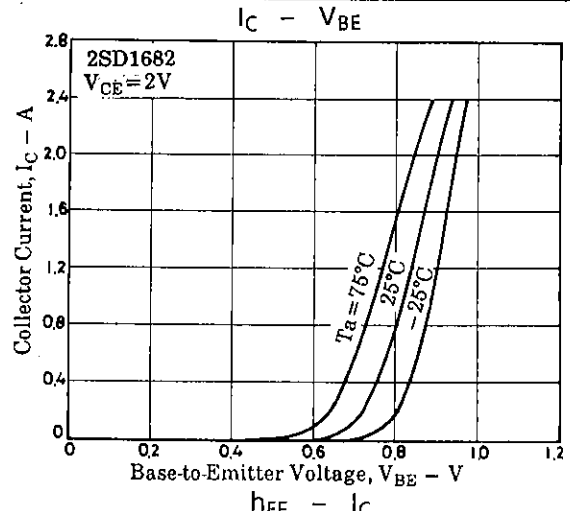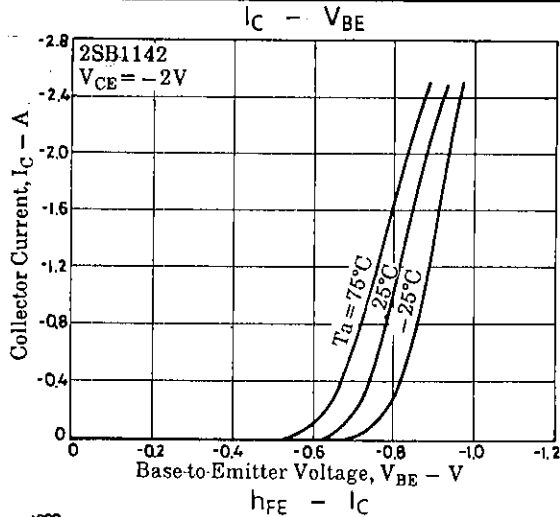

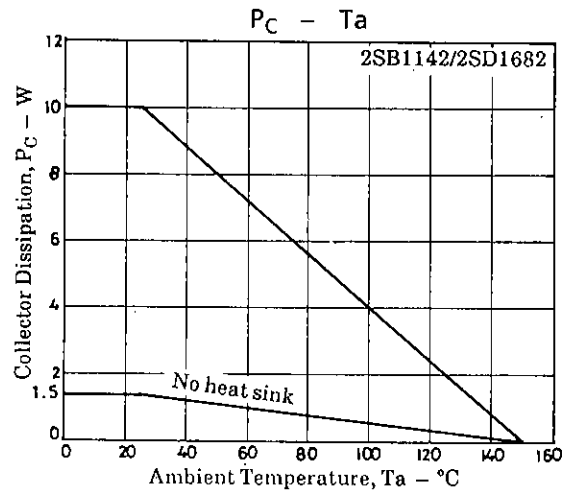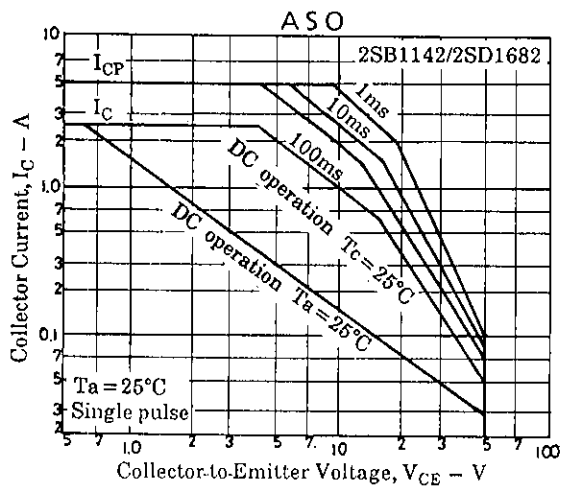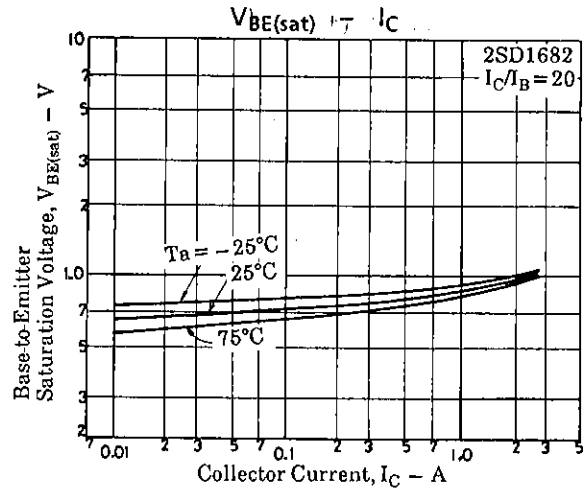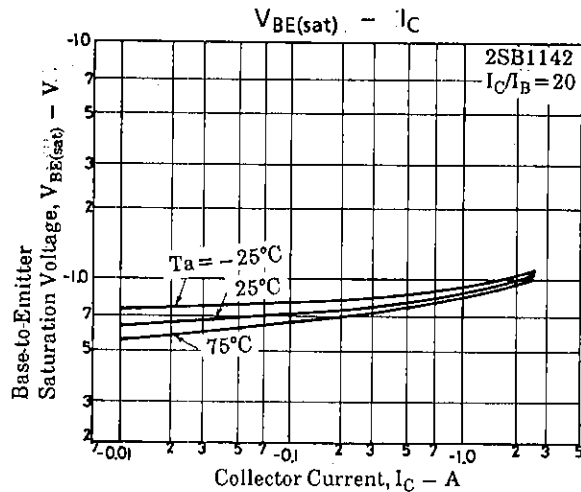

■ No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.

■ Anyone purchasing any products described or contained herein for an above-mentioned use shall:

- ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
- ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.

■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.



О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.



Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (XC), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

Перечень производителей, продукцию которых мы поставляем на российский рынок





Trade Electronics.ru

гарантия бесперебойности производства и
качества выпускаемой продукции

С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

<http://www.tradeelectronics.ru/>