


DIMENSIONS FOR LARGE POLARIZATION RIB TERMINAL ONLY



NOTES: (UNLESS OTHERWISE SPECIFIED)

- MATING TERMINAL SHOWN ON SD-33000-001
- MATERIAL: ASTM B422, UNS C19025, HR04
THICKNESS: 0.30 mm ±0.01
TEMPER: FULL HARD (REF)
TENSILE: 496 MIN MPA
- TIN PLATED TERMINAL FINISH:
OVERALL UNDERPLATE ELECTRODEPOSITED NICKEL
OVERALL ELECTRODEPOSITED REFLOW TIN
- GOLD PLATED TERMINAL FINISH:
OVERALL UNDERPLATE ELECTRODEPOSITED DUCTILE SULFAMATE NICKEL
CONTACT AREA - ELECTRODEPOSITED GOLD
GRIP AREA - ELECTRODEPOSITED 100% TIN MATTE FINISH
- SILVER PLATED TERMINAL FINISH:
OVERALL UNDERPLATE ELECTRODEPOSITED DUCTILE SULFAMATE NICKEL
CONTACT AREA - ELECTRODEPOSITED PURE SILVER (0.5% MAX IMPURITIES) SEMI-BRIGHT FINISH
- SILVER ANTI-TARNISH : EVABRITE
GRIP AREA - ELECTRODEPOSITED 100% TIN MATTE FINISH
- MEETS PERFORMANCE SPECIFICATION FOR CABLE TO TERMINAL ELECTRICAL CRIMPS PER SAE/USCAR-21 (8/2001)
- MEETS PERFORMANCE STANDARD FOR AUTOMOTIVE ELECTRICAL CONNECTOR SYSTEMS FOR SAE/USCAR-2, REV. 4 (TEMP CLASS 3) (4/2001)
- MEETS ELECTRICAL CONNECTION SYSTEM DESIGN SPECIFICATION (SDS) REV.11 (5/2002)
- MEETS FIELD CORRELATED LIFE TEST (FCLT) PER SAE/USCAR-20 (11/2001)
- MEETS WIRING COMPONENT DESIGN GUIDELINES SAE/USCAR-12 REV 2 (12/2001)
- TSC ON A DIMENSION TO BE INTERPRETED AS DISTANCE TO A THEORETICAL SHARP CORNER AS IF THE RADIUS WERE NOT PRESENT
- REFERENCE 97BG-14474-AAB FOR LARGE POLARIZATION RIB CAVITY SPECIFICATION
- INSERTION FORCE (TIN) AVG. FROM PV TESTING =
3.8N LARGE POLARIZATION RIB
3.5N SMALL POLARIZATION RIB (REFERENCE)
- ALL DIMENSIONS EXCEPT (1), (2), (3) & (4) ARE COMMON TO BOTH SMALL AND LARGE POLARIZATION RIB TERMINALS
- REFERENCE PK-31300-516 FOR REEL DIRECTION
- REFERENCE AS-33012-002 FOR CRIMP INFORMATION

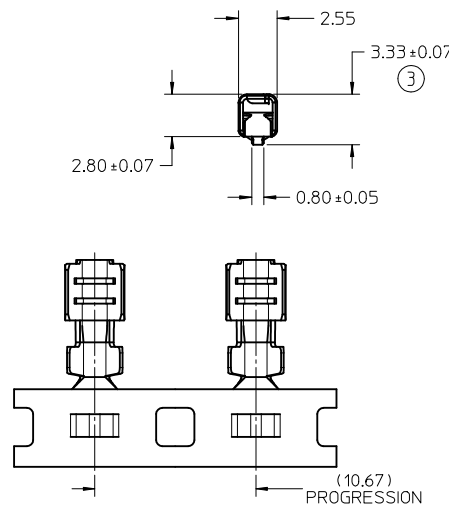


STAMP PLATING TYPE
Sn-TIN, Au-GOLD OR
Ag-SILVER IN THIS
AREA

SEE SHEET 5
0.35mm² AND 0.50mm²
ISO WIRE SIZE P/N'S
33012-2004/3004
33001-4005/5005

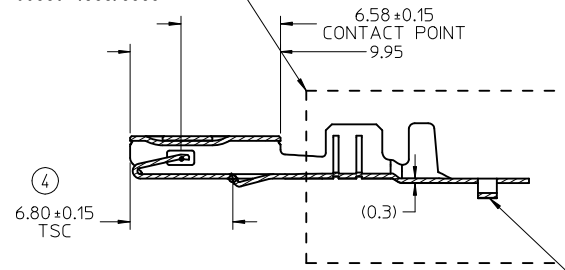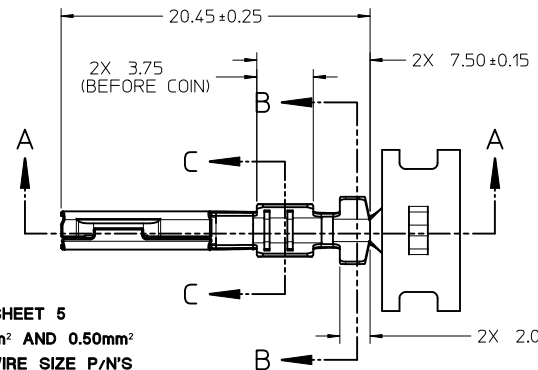


SECTION A-A


CARRIER BUMP DIRECTION
POINTS DOWN FOR TIN PLATED TERMINALS
POINTS UP FOR PRECIOUS PLATED TERMINALS



SCALE 2:1



SECTION B-B SCALE 5:1



SECTION C-C SCALE 5:1

ENTER DESCRIPTION
EC NO: UAU2011-1208
DRAWN:ADHIR 2011/06/28
CHKD:
APPR:BMOSER 2011/07/06
REV

QUALITY SYMBOLS
▽=0
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± 0.10	± 0.004
3 PLACES	± 0.005	± 0.0002
2 PLACES	± 0.10	± 0.004
1 PLACE	± 0.3	± 0.012
ANGULAR ± 3 °		

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM ONLY

DRAWN BY	DATE
L. PULLIAM	2005/06/21
CHECKED BY	DATE
A. DHIR	2005/06/21
APPROVED BY	DATE
B. MOSER	2005/06/22

MATERIAL NO.
SEE TABLE

SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
4:1	METRIC	

MX150
RECEPTACLE TERMINAL

MOLEX INCORPORATED

DOCUMENT NO. SD-33012-002

SHEET NO. 1 OF 5

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

13	12	11	10	9	8	7	6	5	4	3	2	1
TABLE												
SUPPLIER PART NUMBER		PLATING	GRIP CODE	WIRE APPLICATION	A +0.30	B +0.30	C +0.30	D +0.30	COMMENTS			
SMALL POLARIZATION RIB												
RIGHT PAYOFF DIRECTION B	LEFT PAYOFF DIRECTION D			SAE (AWG)	METRIC (mm²)							
33012-2001	33012-3001	TIN	14	14/16	2.0-15	3.9	4.4	1.7	1.6			
33012-2002	33012-3002	TIN	18	18/20	1.0-0.75	3.3	3.1	1.3	1.4			
33012-2003	33012-3003	TIN	22	22	0.35-0.50	2.5	2.6	0.9	1.0			
33012-2004	33012-3004	TIN	M3	N/A	0.35-0.50	2.5	2.7	0.9	1.54±0.1	PREFERRED TERMINAL FOR USE IN SEALED APPLICATION WITH 0.35& 0.50 WIRES (OD 1.2-1.7mm)		
33001-2003	33001-3003	GOLD	14	14/16	2.0-15	3.9	4.4	1.7	1.6			
33001-2004	33001-3004	GOLD	18	18/20	1.0-0.75	3.3	3.1	1.3	1.4			
33001-2005	33001-3005	GOLD	22	22	0.35-0.50	2.5	2.6	0.9	1.0			
33001-4001	33001-5001	SILVER	14	14/16	2.0-15	3.9	4.4	1.7	1.6			
33001-4002	33001-5002	SILVER	18	18/20	1.0-0.75	3.3	3.1	1.3	1.4			
33001-4003	33001-5003	SILVER	22	22	0.35-0.50	2.5	2.6	0.9	1.0			
33001-4005	33001-5005	SILVER	M3	N/A	0.35-0.50	2.5	2.7	0.9	1.54±0.1	PREFERRED TERMINAL FOR USE IN SEALED APPLICATION WITH 0.35& 0.50 WIRES (OD 1.2-1.7mm) USE IN CLASS 3 (125° C) APPLICATIONS ONLY		
LARGE POLARIZATION RIB - NOT TO BE USED IN MX150 SEALED CONNECTORS												
33012-2021	33012-3021	TIN	14	14/16	2.0-15	3.9	4.4	1.7	1.6			
33012-2022	33012-3022	TIN	18	18/20	1.0-0.75	3.3	3.1	1.3	1.4			
33012-2023	33012-3023	TIN	22	22	0.35-0.50	2.5	2.6	0.9	1.0			
33001-2021	33001-3021	GOLD	14	14/16	2.0-15	3.9	4.4	1.7	1.6			
33001-2022	33001-3022	GOLD	18	18/20	1.0-0.75	3.3	3.1	1.3	1.4			
33001-2023	33001-3023	GOLD	22	22	0.35-0.50	2.5	2.6	0.9	1.0			
33001-4021	33001-5021	SILVER	14	14/16	2.0-15	3.9	4.4	1.7	1.6			
33001-4022	33001-5022	SILVER	18	18/20	1.0-0.75	3.3	3.1	1.3	1.4			
33001-4023	33001-5023	SILVER	22	22	0.35-0.50	2.5	2.6	0.9	1.0			

SECTION G-G

GROMMET CAP OPENING

**GROMMET SEAL / CAP CONFIGURATION TO MODIFY
LARGE POLARIZATION RIB CAVITY TO ACCEPT
SMALL POLARIZATION RIB APPLICATIONS**








ENTER DESCRIPTION EC NO: UAU2011-1208 DRAWN:ADHR 2011/06/28 CHKD: APPR:BMOSER 2011/07/06		QUALITY SYMBOLS =0 =0 =0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± 0.005 ± --- 2 PLACES ± 0.10 ± --- 1 PLACE ± 0.3 ± --- ANGULAR ± 3 °	DIMENSION STYLE MM ONLY DRAWN BY DATE L. PULLIAM 2005/06/21 CHECKED BY DATE A. DHIR 2005/06/21 APPROVED BY DATE B. MOSER 2005/06/22 MATERIAL NO.	SCALE THIRD ANGLE PROJECTION	DESIGN UNITS METRIC	TITLE MX150 RECEPTACLE TERMINAL	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS <td colspan="2">SEE TABLE<td colspan="2">DOCUMENT NO. SD-33012-002</td></td>				SEE TABLE <td colspan="2">DOCUMENT NO. SD-33012-002</td>		DOCUMENT NO. SD-33012-002		
SIZE C				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

12	11	10	9	8	7	6	5	4	3	2	1
tb_frame_C.P_AM.T Rev. F 2009/06/18											

THIS CHECKING - AID IS FOR SMALL POLARIZATION RIB TERMINALS ONLY



CHECKING - AID ASSEMBLY
SCALE 1:1

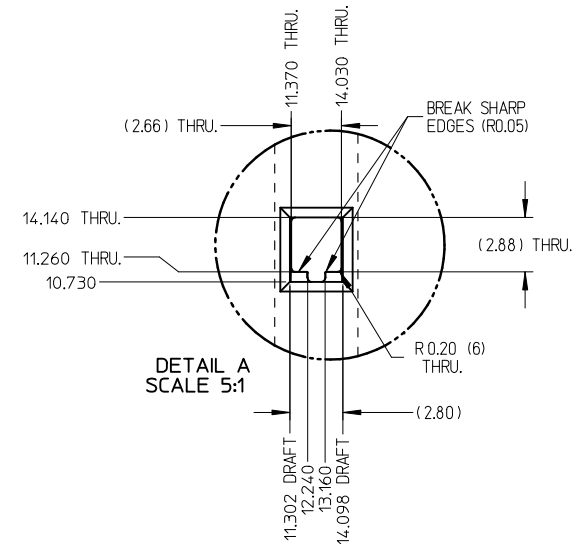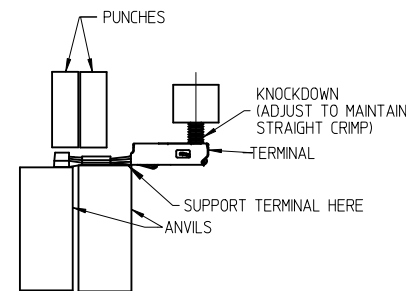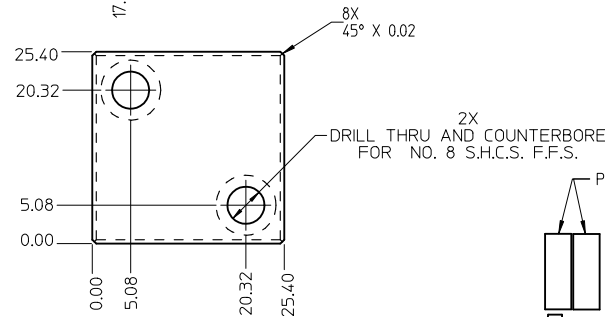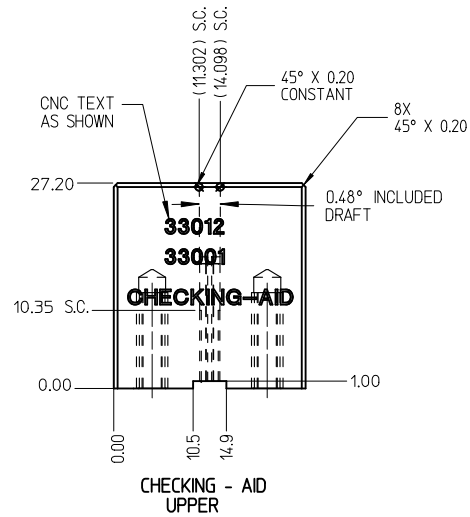

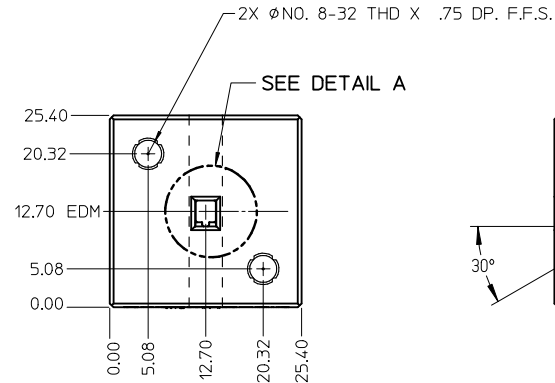


CRIMP REQUIREMENTS:

1. CRIMP STRAIGHTNESS MUST BE MAINTAINED
USE A KNOCKDOWN TOOL LOCATED AS SHOWN
TERMINAL BOX MUST NOT BE DEFORMED
2. AFTER CRIMPING, THE CRIMPED TERMINAL (AND UP TO 5 mm
OF WIRE PAST THE INSULATOR CUTOFF TAB) MUST FIT FREELY
INTO THE CHECKING-AID SHOWN ON THIS PAGE
3. FOR OTHER MECHANICAL REQUIREMENTS ON CRIMPED
TERMINALS, REFER TO SAE/USCAR-21 (5-13-02)
SECTIONS 4.2 (VISUAL INSPECTION), 4.2 (CROSS SECTION
ANALYSIS) AND 4.4 (CONDUCTOR CRIMP PULLOUT FORCE)





UPPER & LOWER
CHECKING-AID
A2 TOOL STEEL
HARDEN & GRIND
ROCKWELL "C" 56-58

ENTER DESCRIPTION EC NO: UAU2011-1208 DRWN:ADHIR CHKD: APPR:BMOSER	DESCRIPTION REV	QUALITY SYMBOLS F =0 F =0 F =0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION			
				mm	INCH	DRAWN BY L. PULLIAM	DATE 2005/06/21	TITLE MX150 RECEPTACLE TERMINAL				
			4 PLACES	± ---	± ---	CHECKED BY A. DHIR	DATE 2005/06/21					
			3 PLACES	± 0.005	± ---	APPROVED BY B. MOSER		DATE 2005/06/22	molex MOLEX INCORPORATED			
			2 PLACES	± 0.10	± ---							
			1 PLACE	± 0.3	± ---	MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-33012-002	SHEET NO. 3 OF 5			
			ANGULAR ± 3 °									
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

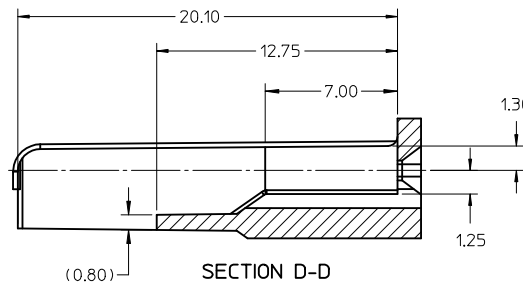


NOTES: UNLESS OTHERWISE SPECIFIED

1. TOLERANCES: LINEAR ± 0.10
ANGULAR $\pm 3^\circ$
2. ALL DRAFT WITHIN TOLERANCE.
3. MAX RADII ON ALL CORNERS SHOWN SHARP: 0.10
4. MAX FLASH PERMISSIBLE: 0.1
5. EJECTOR PIN MARKS PERMISSIBLE IF FLUSH TO 0.25 BELOW SURFACE.
6. MATERIAL: HOUSING/FINGER SPECIFICATION ENGINEERED FOR MATERIAL WITH THE FOLLOWING PROPERTIES:
A. FLEXURAL MODULUS = 4,500 TO 9,400 MPa
PER ASTM TEST D790
B. ELONGATION AT YIELD = 2.3% OR BETTER
PER ASTM TEST D638 TYPE V
7. CAVITY SPEC FOR USE ONLY WITH MOLEX RECEPTACLE
TERMINAL PART NUMBERS SPECIFIED ELSEWHERE ON THIS
DRAWING

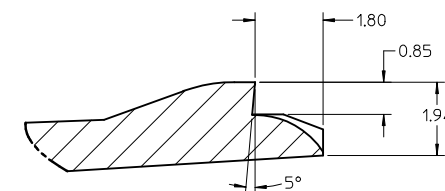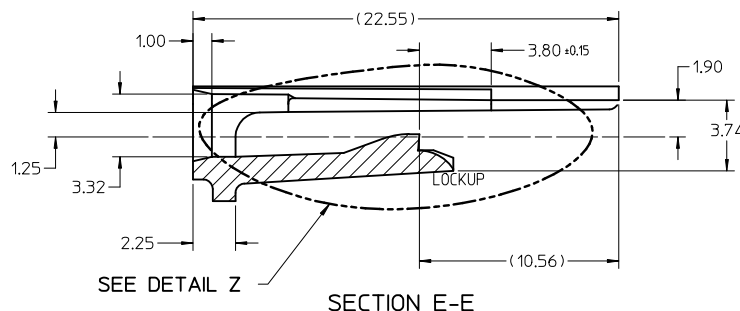



DETAIL Z
SCALE 20:1

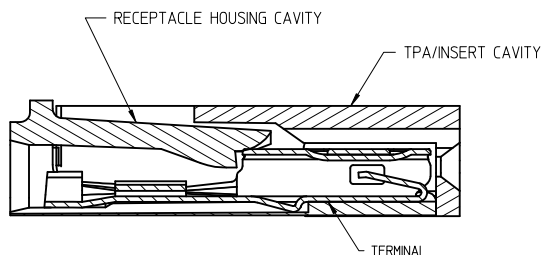


SECTION F-F

RECEPTACLE CAVITY ASSEMBLED VIEWS
FOR SMALL POLARIZATION RIB APPLICATIONS
FIG. 1

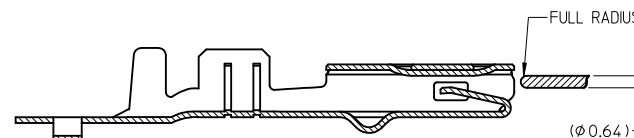

SECTION D-D
FOR LARGE POLARIZATION RIB APPLICATIONS
FIG. 2



PROBING DOWN THE
THROAT MUST USE
THIS TERMINAL PROBE

PROBE PIN DETAILS:
MANUFACTURER: LONE STAR INDUSTRIAL
PART NUMBER: LS054R-403-N-4.6
PIN DIAMETER: 0.025 IN (0.64mm)
TIP SHAPE: SPHERICAL
TEL: 915-779-7255

PREFERRED PROBING LOCATION
IS NOT ON SPRING MEMBER

IF ELECTRICAL CONTINUITY PROBE
TOUCHES SPRING MEMBER USE
PROBING AS SHOWN IN FIG. 2

ENTER DESCRIPTION
EC NO: UAU2011-1208
DRAWN:ADHIR
CHKD:
APPR:BMOSER
REV

DATE
2011/06/28
2011/07/06
DESCRIPTION
REV

QUALITY
SYMBOLS
▽=0
▽=0
▽=0

GENERAL TOLERANCES
(UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± 0.10	± 0.004
3 PLACES	± 0.005	± 0.0002
2 PLACES	± 0.10	± 0.004
1 PLACE	± 0.3	± 0.012

ANGULAR $\pm 3^\circ$

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM ONLY

DRAWN BY
L. PULLIAM

DATE
2005/06/21

CHECKED BY
A. DHIR

DATE
2005/06/21

APPROVED BY
B. MOSER

DATE
2005/06/22

MATERIAL NO.
SEE TABLE

SIZE
C

SCALE
5:1

DESIGN UNITS
METRIC

THIRD ANGLE
PROJECTION


MX150
RECEPTACLE TERMINAL

MOLEX INCORPORATED






DOCUMENT NO.
SD-33012-002

SHEET NO.
4 OF 5

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION



ISO VIEW
SCALE 2:1

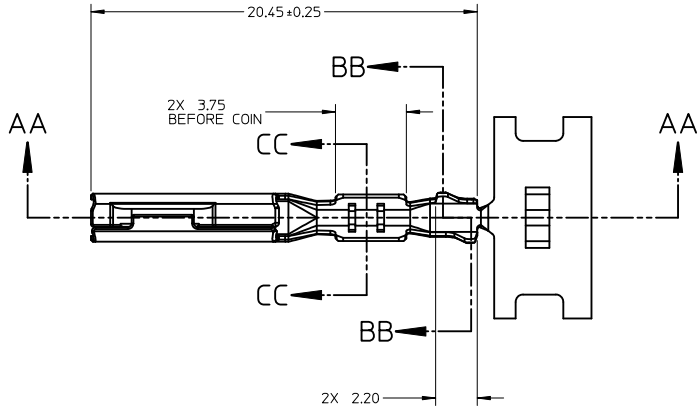

SECTION AA-AA

P/N'S 33012-2004/3004
33001-4005/5005

CARRIER BUMP DIRECTION
POINTS DOWN FOR TIN PLATED TERMINAL
POINTS UP FOR PRECIOUS METAL PLATED
TERMINAL

ENTER DESCRIPTION EC NO: UAU2011-1208 2011/06/28 DRWN:ADHIR CHKD: APPR:BMOSER 2011/07/06	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 5:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
				mm	INCH	DRAWN BY DATE		TITLE		
			4 PLACES	± ---	± ---	L. PULLIAM 2005/06/21		MX150 RECEPTACLE TERMINAL		
			3 PLACES	± 0.005	± ---	CHECKED BY DATE				
			2 PLACES	± 0.10	± ---	A. DHIR 2005/06/21				
			1 PLACE	± 0.3	± ---	APPROVED BY DATE				
			ANGULAR ± 3 °		B. MOSER 2005/06/22		 MOLEX INCORPORATED			
					MATERIAL NO.		DOCUMENT NO.		SHEET NO.	
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-33012-002		5 OF 5	
					SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			



О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.

Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (XC), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

Перечень производителей, продукцию которых мы поставляем на российский рынок





Trade Electronics.ru

гарантия бесперебойности производства и
качества выпускаемой продукции

С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

<http://www.tradeelectronics.ru/>