



FEATURES

- 20 WATTS MAXIMUM OUTPUT POWER
- OUTPUT CURRENT UP TO 5.5A
- STANDARD 2.0 X 1.0 X 0.4 INCH PACKAGE
- HIGH EFFICIENCY UP TO 89%
- 4:1 ULTRA WIDE INPUT VOLTAGE RANGE
- SIX-SIDED CONTINUOUS SHIELD
- FIXED SWITCHING FREQUENCY
- CE MARK MEETS 2006/95/EC, 93/68/EEC AND 2004/108/EC
- UL60950-1, EN60950-1 AND IEC60950-1 LICENSED
- ISO9001 CERTIFIED MANUFACTURING FACILITIES
- COMPLIANT TO RoHS EU DIRECTIVE 2002/95/EC

APPLICATIONS

Wireless Network
Telecom/Datacom
Industry Control System
Measurement Equipment
Semiconductor Equipment

OPTIONS

Negative logic Remote On/Off

DESCRIPTION

The FED20W series offer 20 watts of output power from a 2 x 1 x 0.4 inch package. The FED20W series with 4:1 ultra wide input voltage of 9-36 and 18-75VDC and features 1600VDC of isolation, short-circuit and over-voltage protection.

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C otherwise noted

OUTPUT SPECIFICATIONS			
Output power	20 Watts, max.		
Voltage accuracy	Full load and nominal Vin	± 1%	
Minimum load	0%		
Voltage adjustability	Single output	± 10%	
Line regulation	LL to HL at Full Load	Single	± 0.2%
		Dual	± 0.5%
Load regulation	No Load to Full Load	Single	± 0.5%
		Dual	± 1%
Cross regulation (Dual)	Asymmetrical load 25% / 100% FL	± 5%	
Ripple and noise	20MHz bandwidth (Measured with a 0.1µF/50V MLCC)	See table	
Temperature coefficient	±0.02% / °C, max.		
Transient response recovery time	25% load step change	250µS	
Over voltage protection	3.3V output	3.9VDC	
	5V output	6.2VDC	
Zener diode clamp	12V output	15VDC	
	15V output	18VDC	
Over load protection	% of FL at nominal input	150%, typ.	
Short circuit protection	Hiccup, automatics recovery		
GENERAL SPECIFICATIONS			
Efficiency	See table		
Isolation voltage	Input to Output	1600VDC, min.	
	Input(Output) to case	1600VDC, min.	
Case grounding	Connect case to -Vin with decoupling Y Cap		
Isolation resistance	10 ⁹ ohms, min.		
Isolation capacitance	1500pF, max.		
Switching frequency	400KHz, typ.		
Approvals and standard	IEC60950-1, UL60950-1, EN60950-1		
Case material	Nickel-coated copper		
Base material	FR4 PCB		
Potting material	Epoxy (UL94-V0)		
Dimensions	2.00 X 1.00 X 0.40 Inch (50.8X 25.4 X 10.2 mm)		
Weight	27g (0.95oz)		
MTBF (Note 1)	BELLCORE TR-NWT-000332	1.620 x 10 ⁶ hrs	
	MIL-HDBK-217F	6.590 x 10 ⁵ hrs	

INPUT SPECIFICATIONS			
Input voltage range		24V nominal input	9 – 36VDC
		48V nominal input	18 – 75VDC
Input filter			Pi type
Input surge voltage 100mS max		24V input	50VDC
		48V input	100VDC
Input reflected ripple current		Nominal Vin and full load	20mA _{p-p}
Start up time	Nominal Vin and constant resistive load	Power up	20mS, typ.
		Remote ON/OFF	20mS, typ.
Start-up voltage	24V input	9VDC	
	48V input	18VDC	
Shutdown voltage	24V input	7.5VDC	
	48V input	15VDC	
Remote ON/OFF (Note 6)			
(Positive logic)(Standard)	DC-DC ON	Open or 3V < Vr < 12V	
	DC-DC OFF	Short or 0V < Vr < 1.2V	
(Negative logic)(Option)	DC-DC ON	Short or 0V < Vr < 1.2V	
	DC-DC OFF	Open or 3V < Vr < 12V	
Input current of remote control pin		Nominal Vin	-0.5mA ~ +0.5mA
Remote off state input current		Nominal Vin	2.5mA

ENVIRONMENTAL SPECIFICATIONS			
Operating ambient temperature	-40°C ~ +66°C (without derating)		
	+66°C ~ +105°C (with derating)		
Maximum case temperature	105°C		
Storage temperature range	-55°C ~ +125°C		
Thermal impedance (Note 7)	Nature convection		12°C/Watt
	Nature convection with heat-sink		10°C/Watt
Thermal shock	MIL-STD-810F		
Vibration	MIL-STD-810F		
Relative humidity	5% to 95% RH		

EMC CHARACTERISTICS			
EMI (Note 8)	EN55022	Class A	
ESD	EN61000-4-2	Air Contact	± 8KV
			± 6KV
Radiated immunity	EN61000-4-3	10 V/m	Perf. Criteria A
Fast transient (Note 9)	EN61000-4-4	± 2KV	Perf. Criteria B
Surge (Note 9)	EN61000-4-5	± 1KV	Perf. Criteria A
Conducted immunity	EN61000-4-6	10 Vr.m.s	Perf. Criteria A










Model Number	Input Range	Output Voltage	Output Current		Output ⁽⁴⁾ Ripple & Noise	Input Current		Eff ⁽⁴⁾ (%)	Capacitor ⁽⁵⁾ Load max
			Min. load	Full load		No Load ⁽³⁾	Full Load ⁽²⁾		
FED20-24S3P3W	9 – 36 VDC	3.3 VDC	0mA	5500mA	60mVp-p	50mA	934mA	85	18000μF
FED20-24S05W	9 – 36 VDC	5 VDC	0mA	4000mA	75mVp-p	65mA	992mA	88	9600μF
FED20-24S12W	9 – 36 VDC	12 VDC	0mA	1670mA	75mVp-p	22mA	1018mA	86	1650μF
FED20-24S15W	9 – 36 VDC	15 VDC	0mA	1330mA	75mVp-p	22mA	1014mA	86	1050μF
FED20-24D05W	9 – 36 VDC	±5 VDC	0mA	±2000mA	100mVp-p	55mA	992mA	88	±4800μF
FED20-24D12W	9 – 36 VDC	±12 VDC	0mA	±833mA	100mVp-p	30mA	1004mA	87	±825μF
FED20-24D15W	9 – 36 VDC	±15 VDC	0mA	±667mA	100mVp-p	30mA	1005mA	87	±525μF
FED20-48S3P3W	18 – 75 VDC	3.3 VDC	0mA	5500mA	60mVp-p	35mA	467mA	85	18000μF
FED20-48S05W	18 – 75 VDC	5 VDC	0mA	4000mA	75mVp-p	35mA	496mA	88	9600μF
FED20-48S12W	18 – 75 VDC	12 VDC	0mA	1670mA	75mVp-p	15mA	503mA	87	1650μF
FED20-48S15W	18 – 75 VDC	15 VDC	0mA	1330mA	75mVp-p	15mA	501mA	87	1050μF
FED20-48D05W	18 – 75 VDC	±5 VDC	0mA	±2000mA	100mVp-p	35mA	490mA	89	±4800μF
FED20-48D12W	18 – 75 VDC	±12 VDC	0mA	±833mA	100mVp-p	17mA	496mA	88	±825μF
FED20-48D15W	18 – 75 VDC	±15 VDC	0mA	±667mA	100mVp-p	17mA	496mA	88	±525μF

Note:

- BELLCORE TR-NWT-000332. Case 1: 50% Stress, Temperature at 40°C.
MIL-HDBK-217F Notice2 @Ta=25 °C, Full load(Ground, Benign, controlled environment)
- Maximum value at nominal input voltage and full load.
- Typical value at nominal input voltage and no load.
- Typical value at nominal input voltage and full load.
- Test by minimum Vin and constant resistive load.
- The ON/OFF control pin voltage is referenced to -Vin.
To order negative logic ON/OFF control add the suffix-N (Ex: FED20-48S05W-N)
- Heat sink is optional and P/N: 7G-0020C-F.
- The FED20W series can meet EN55022 Class A with parallel an external capacitor to the input pins.
Recommend : 24Vin : NA.
48Vin : 1μF/100V 1210 MLCC.
- An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5.
The filter capacitor Power Mate suggest: Nippon chemi-con KY series, 220 μF/100V, ESR 48mΩ.

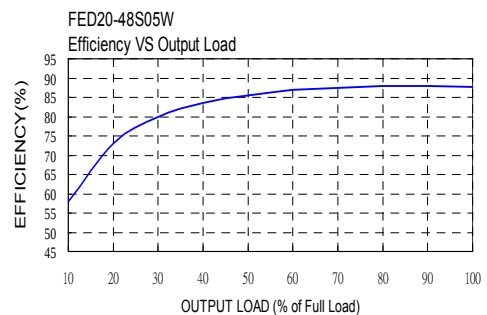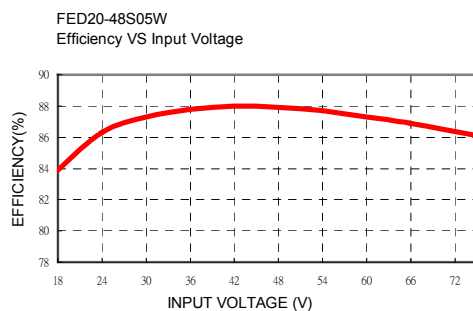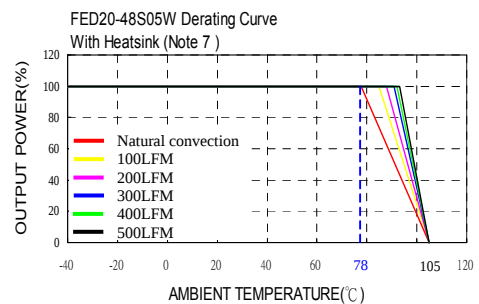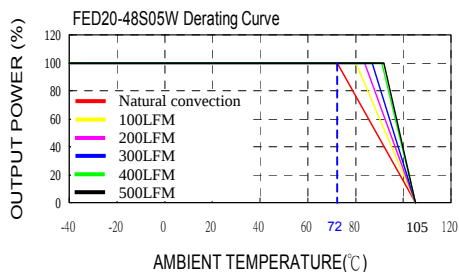


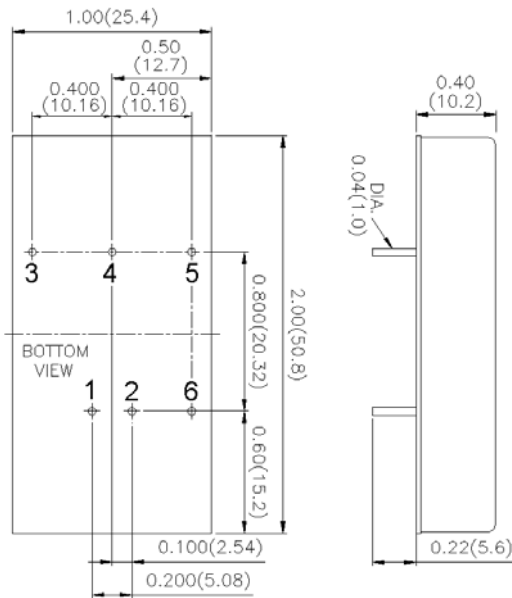


1. All dimensions in Inches (mm)
Tolerance: X.XX±0.02 (X.X±0.5)
X.XXX±0.01 (X.XX±0.25)
2. Pin pitch tolerance ±0.01(0.25)
3. Pin dimension tolerance ±0.004 (0.1)

PIN CONNECTION		
PIN	SINGLE	DUAL
1	+ INPUT	+ INPUT
2	- INPUT	- INPUT
3	+ OUTPUT	+ OUTPUT
4	TRIM	COMMON
5	- OUTPUT	- OUTPUT
6	CTRL	CTRL

EXTERNAL OUTPUT TRIMMING


Output can be externally trimmed by using the method shown below.

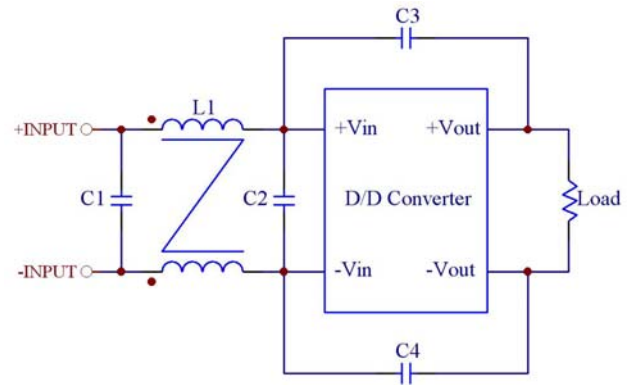

Recommended Filter for EN55022 Class B Compliance

The components used in the above figure, together with the manufacturers' part numbers for these components, are as follows:

	C1	C2	C3	C4	L1
FED20-24xxxW	4.7μF/50V 1812 MLCC	N/A	1000pF/2KV MLCC	1000pF/2KV MLCC	450μH Common Choke PMT-048
FED20-48xxxW	2.2μF/100V 1812 MLCC	2.2μF/100V 1812 MLCC	1000pF/2KV MLCC	1000pF/2KV MLCC	325μH Common Choke PMT-050

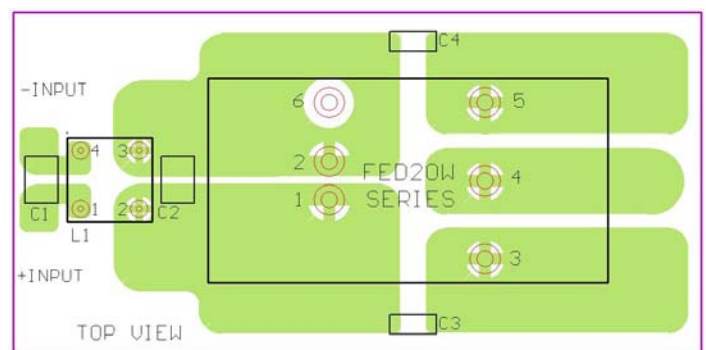

Recommended EN55022 Class B Filter Circuit Layout



О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.

Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (XC), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

Перечень производителей, продукцию которых мы поставляем на российский рынок





Trade Electronics.ru

гарантия бесперебойности производства и
качества выпускаемой продукции

С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

<http://www.tradeelectronics.ru/>