


Type CS (Capstick®) Metallized Polymer Network

Radial Multi-pin Metallized Polymer Network for DC to DC Converters

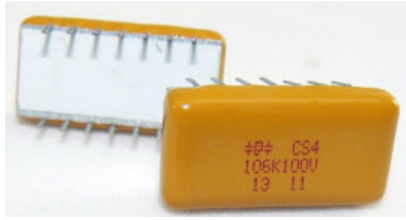

The Type CS multi-pin metallized polymer network is ideal for the low ESR/ESL requirements in DC to DC converters and switching power supply applications. This unique, robust, capacitor design offers high ripple current capability and high capacitance in a small package. It is available with straight pins on 0.10" centers for through-hole mounting or with gull wing leads for surface mount assembly. Type CS (Capstick®) is encapsulated in a rugged conformal coating and is packaged in anti-static tubes for easy handling.

Highlights

- ◆ Rugged conformal coated case meets UL94V-0
- ◆ Low ESR/ESL
- ◆ High ripple current
- ◆ High capacitance in a small package
- ◆ Non-inductive design
- ◆ Non-polar
- ◆ Surface mount or through hole assembly
- ◆ Multi-pin leads on 0.10" centers

Specifications

RoHS Compliant


| | |
|---|--|
| Capacitance Range: | 0.33 μF to 20.0 μF |
| Voltage Range: | 50 Vdc, 100 Vdc, 250 Vdc, 400 Vdc, 500 Vdc |
| Capacitance Tolerance: | \pm10% |
| Operating Temperature Range for 50, 100 and 250 Vdc: | -55 °C to +125 °C (with 50% Vdc derating >85 °C) |
| Operating Temperature Range for 400 and 500 Vdc: | -55 °C to +125 °C with no derating |
| Construction: | Multilayer metallized polymer dielectric |
| Temperature Coefficient: | +6% from -55 °C to +85 °C |
| Dielectric Withstand Voltage: | 1.3 x rated voltage: 50/100/250/500 Vdc 1.6 x rated voltage: 400 Vdc |
| Dissipation Factor (DF): | \leq1.0% @ 1 kHz |
| Total Self Inductance (L): | <6 nH typical (CS6) < 4 nH typical (CS4) |
| Lead Material: | Tinned copper alloy frame |
| Insulation Resistance: | \geq1000 MΩ \cdot μF - need not exceed 1000 MΩ |

Part Numbering System

| | | | | | | | |
|--------------------|---------------|---------------|-----------|--------------------|-----------------------|----------|------------------|
| 405 | K | 100 | CS | 4 | G | - | FA |
| Cap | | | | Pin | "Optional" | | |
| (μ F) | Tolerance | Voltage | Series | Spacing | (*) | | |
| 334 = 0.33 μ F | K = \pm 10% | 050 = 50 Vdc | CS | 4 = 0.4" (10.0 mm) | Blank = Straight Pins | | Blank = 5/6 RoHS |
| 405 = 4.0 μ F | | 100 = 100 Vdc | | 6 = 0.6" (15.0 mm) | G = Gull Wing | | FA = 6/6 RoHS |
| 206 = 20.0 μ F | | 400 = 400 Vdc | | | | | |

Type CS (Capstick®) Metallized Polymer Network

Capacitor Outline Drawing

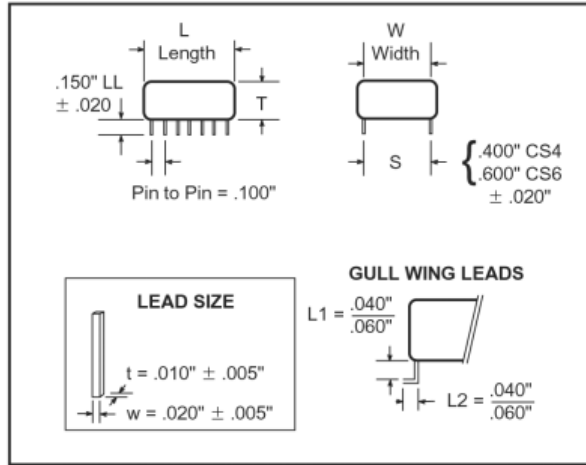

Test Method and Performance

| Accelerated Dry Life | |
|---------------------------------|---|
| Test Conditions | Temperature: $+85^\circ\text{C} \pm 5^\circ\text{C}$ Applied Voltage: 1.25 x rated voltage Test Duration: 1000 hours performance |
| Requirements | Capacitance: Change of $\leq 5.0\%$ Dissipation Factor: $\leq 1.0\%$ @ 1 kHz Insulation Resistance: $\geq 1\text{K M}\Omega \cdot \mu\text{F}$, need not exceed 1 K M Ω |
| Humidity | |
| Test Conditions | Temperature: $+85^\circ\text{C} \pm 2.0^\circ\text{C}$ Applied Voltage: Zero voltage Humidity: $85\% \pm 2\%$ RH Test Duration: 21 days |
| Performance Requirements | Capacitance Change of $\leq 7.0\%$ Dissipation Factor $\leq 1.0\%$ @ 1 kHz Insulation Resistance $\geq 30\%$ of limit value |
| Soldering | |
| Test Conditions | Thru Hole Soldering Temperature: 260°C , 5 sec. SMD Reflow Soldering Temperature: 220°C , 30 sec. |
| Performance Requirements | Capacitance: Change of $\leq 2\%$ |
| Capacitance Drift: | $\leq 2.0\%$ over 2 years between 0°C and 35°C and a RH of between 35% and 65% |
| Vibration | Conforms to MIL-STD-202 Method 204D |

Note: The 400 Vdc rating can handle a 450 Vdc surge and is built to a 640 Vdc high potential.

Ratings

RoHS Compliant

| Catalog Part Number | Cap (μF) | DC Voltage | ESR Ω @ 500 kHz | RMS Current @ 500 kHz | W Max. Inches (mm) | T Max. Inches (mm) | L Max. Inches (mm) | Nom. L.S. Inches (mm) | Leads Per Side | Tube Quantity |
|---------------------|----------|------------|-----------------|-----------------------|--------------------|--------------------|--------------------|-----------------------|----------------|---------------|
| 50 Vdc | | | | | | | | | | |
| 106K050CS4* | 10.00 | 50 | 0.0030 | 15.3 | 0.5 (12.7) | 0.32 (8.1) | 0.620 (15.7) | 0.4 (10) | 5 | 32 |
| 206K050CS4* | 20.00 | 50 | 0.0025 | 17.8 | 0.5 (12.7) | 0.32 (8.1) | 1.150 (29.2) | 0.4 (10) | 9 | 16 |
| 100 Vdc | | | | | | | | | | |
| 205K100CS4* | 2.00 | 100 | 0.009 | 8.3 | 0.5 (12.7) | 0.25 (6.4) | 0.450 (11.4) | 0.4 (10) | 3 | 44 |
| 405K100CS4* | 4.00 | 100 | 0.007 | 11.5 | 0.5 (12.7) | 0.25 (6.4) | 0.450 (11.4) | 0.4 (10) | 3 | 44 |
| 475K100CS4* | 4.70 | 100 | 0.006 | 12.2 | 0.5 (12.7) | 0.25 (6.4) | 0.525 (13.3) | 0.4 (10) | 3 | 38 |
| 685K100CS4* | 6.80 | 100 | 0.005 | 13.7 | 0.5 (12.7) | 0.25 (6.4) | 0.700 (17.8) | 0.4 (10) | 5 | 35 |
| 106K100CS4* | 10.00 | 100 | 0.003 | 15.3 | 0.5 (12.7) | 0.25 (6.4) | 0.995 (25.3) | 0.4 (10) | 7 | 20 |
| 250 Vdc | | | | | | | | | | |
| 105K250CS6* | 1.00 | 250 | 0.012 | 5.2 | 0.7 (17.8) | 0.30 (7.6) | 0.440 (11.2) | 0.6 (15) | 3 | 44 |
| 400 Vdc | | | | | | | | | | |
| 334K400CS6* | 0.33 | 400 | 0.012 | 6.0 | 0.7 (17.8) | 0.32 (8.1) | 0.435 (11.0) | 0.6 (15) | 3 | 44 |
| 474K400CS6* | 0.47 | 400 | 0.011 | 6.2 | 0.7 (17.8) | 0.32 (8.1) | 0.460 (11.7) | 0.6 (15) | 3 | 42 |
| 105K400CS6* | 1.00 | 400 | 0.008 | 9.5 | 0.7 (17.8) | 0.32 (8.1) | 0.880 (22.4) | 0.6 (15) | 7 | 22 |
| 500 Vdc | | | | | | | | | | |
| 474K500CS6* | 0.47 | 500 | 0.011 | 6.2 | 0.7 (17.8) | 0.32 (8.1) | 0.625 (15.9) | 0.6 (15) | 4 | 32 |
| 105K500CS6* | 1.00 | 500 | 0.008 | 9.5 | 0.7 (17.8) | 0.32 (8.1) | 1.135 (28.8) | 0.6 (15) | 8 | 16 |

О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.

Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (XC), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

Перечень производителей, продукцию которых мы поставляем на российский рынок



С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

<http://www.tradeelectronics.ru/>