MICRO COMBICON Headers for Through Hole Reflow Applications MC(V) 0,5/…G-2,5 THT 2.5 mm Pitch

The consistent use of Through Hole Reflow plug connectors has also made it necessary to extend the COMBICON THR range to include the miniature pitch of 2.5 mm. The new THR MICRO COMBICON headers are of high-temperature resistant plastic and are ideally suited for the SMT reflow processes commonly encountered in industrial environments.

The possibility of being able to process the THR header together with SMD components in just one step using the PIN IN PASTE process, extends the scope of performance of the compact and space-saving MICRO plug connector. The familiar standard component family is now available with 2-12 positions as both vertical and horizontal version, as THR component.

The MC(V) 0,5-THT pin strips are equipped with 3.5 mm standard solder pins, and versions with short solder pins are also available on request. In combination with the through contacted drilled holes, the THR pin strips achieve the same high degree of mechanical stability as the headers soldered using the wave soldering process. The articles are available in loosely packaged form, but can also be supplied on request in a 44 mm wide tape.

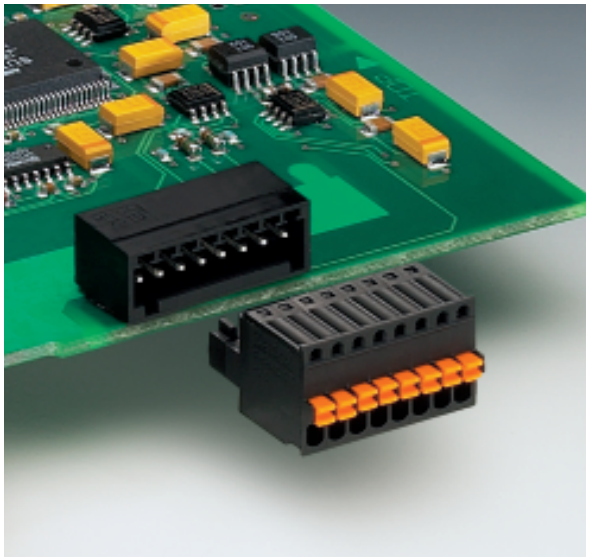

COMBICON Select

The COMBICON search engine with CAD downloading

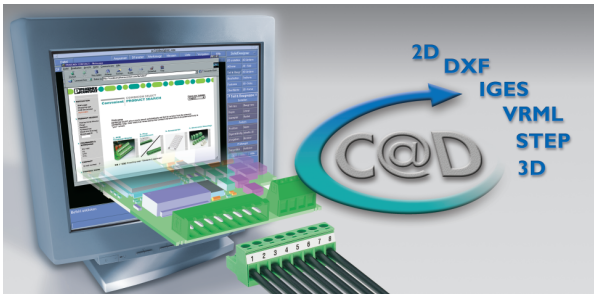

COMBICON Select – the printed circuit board connection software supports your workflow from the PCB and housing layout to the ordering process with:
–Systematic and fast selection of products
–Universal Internet aided engineering with extensive CAD downloading
–Easy-to-use e-shopping functions.

http://select.phoenixcontact.com

Phoenix Contact GmbH & Co. KG • 32823 Blomberg, Germany
Phone +49 52 35 3-00 • Fax +49 52 35 3-4 12 00 • www.phoenixcontact.com
Local Contatct: www.phoenixcontact.com/salesnetwork

MC 0,5/…-G-2,5 THT
2.5 mm Pitch

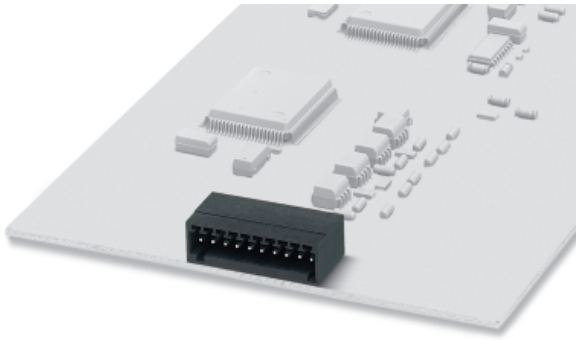

Note:
COMBICON plug connectors may only be actuated in the no-load condition. If smaller loads need to be switched for operational reasons, experimental values are available on request.

Description	No. of pos.	Dim. a [mm]	Type	Order No.	Pcs./Pkt.
Headers, plug-in direction parallel to the conductor axis, 2.5 mm pitch, color: black,	2	2.5	**MC 0,5/2-G-2,5 THT**	**19 63 42 1**	50
	3	5	**MC 0,5/3-G-2,5 THT**	**19 63 43 4**	
	4	7.5	**MC 0,5/4-G-2,5 THT**	**19 63 44 7**	
	5	10	**MC 0,5/5-G-2,5 THT**	**19 63 45 0**	
	6	12.5	**MC 0,5/6-G-2,5 THT**	**19 63 46 3**	
	7	15	**MC 0,5/7-G-2,5 THT**	**19 63 47 6**	
	8	17.5	**MC 0,5/8-G-2,5 THT**	**19 39 30 3**	
	9	20	**MC 0,5/9-G-2,5 THT**	**19 63 49 2**	
	10	22.5	**MC 0,5/10-G-2,5 THT**	**19 63 50 2**	
	11	25	**MC 0,5/11-G-2,5 THT**	**19 63 51 5**	
	12	27.5	**MC 0,5/12-G-2,5 THT**	**19 39 31 6**	
(1) **Coding profile,** is inserted into the groove on the header **after** reflow-soldering, made of red plastic			**CP-MC 0,5**	**18 81 43 5**	100

Technical data				
Dimensions		see description		
Pitch	[mm]	2.5		
Hole diameter	[mm]	*) ≤ 8-pos. = 1.2 / > 8-pos. = 1.3		
Pin dimensions	[mm]	0.8 x 0.8		
Technical data in accordance with IEC/ DIN VDE				
Insulating material group	–	IIIa		
Surge voltage category / contamination class	–/–	III / 3	III / 2	II / 2
Rated voltage	[V]	32	160	160
Rated surge voltage	[kV]	1.5	2.5	2.5
Nominal current / cross section	[A]/[mm²]	4 / –		
Maximum load current / cross section	[A]/[mm²]	4 / –		
Insulating material		PA		
Inflammability class in acc. with UL 94		V0		
Approval data (UL/CUL and CSA)				
Nominal voltage / current / conductor sizes	UL/CUL: [V]/[AI/AWG CSA: [V]/[AI/AWG	applied for –		





MCV 0,5/…-G-2,5 THT
2.5 mm Pitch

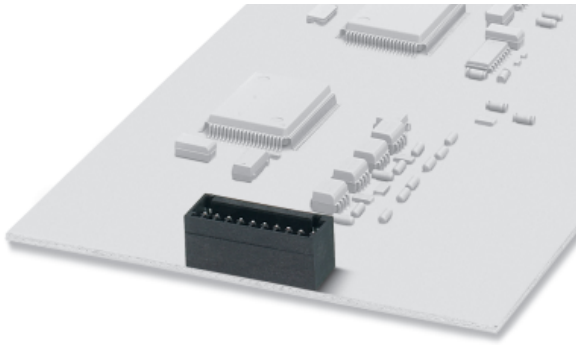

Note:
COMBICON plug connectors may only be actuated in the no-load condition. If smaller loads need to be switched for operational reasons, experimental values are available on request.

Description	No. of pos.	Dim. a [mm]	Type	Order No.	Pcs./Pkt.
Headers, plug-in direction vertical to the conductor axis, 2.5 mm pitch, color: black,	2	2.5	**MCV 0,5/2-G-2,5 THT**	**19 63 53 1**	50
	3	5	**MCV 0,5/3-G-2,5 THT**	**19 63 54 4**	
	4	7.5	**MCV 0,5/4-G-2,5 THT**	**19 63 55 7**	
	5	10	**MCV 0,5/5-G-2,5 THT**	**19 63 56 0**	
	6	12.5	**MCV 0,5/6-G-2,5 THT**	**19 63 57 3**	
	7	15	**MCV 0,5/7-G-2,5 THT**	**19 63 58 6**	
	8	17.5	**MCV 0,5/8-G-2,5 THT**	**19 63 59 9**	
	9	20	**MCV 0,5/9-G-2,5 THT**	**19 63 60 9**	
	10	22.5	**MCV 0,5/10-G-2,5 THT**	**19 63 61 2**	
	11	25	**MCV 0,5/11-G-2,5 THT**	**19 63 62 5**	
	12	27.5	**MCV 0,5/12-G-2,5 THT**	**19 63 63 8**	
(1) **Coding profile,** is inserted into the groove on the header **after** reflow-soldering, made of red plastic			**CP-MC 0,5**	**18 81 43 5**	100

Technical data				
Dimensions		see description		
Pitch	[mm]	2.5		
Hole diameter	[mm]	*) ≤ 8-pos. = 1.2 / > 8-pos. = 1.3		
Pin dimensions	[mm]	0.8 x 0.8		
Technical data in accordance with IEC/ DIN VDE				
Insulating material group	–	IIIa		
Surge voltage category / contamination class	–/–	III / 3	III / 2	II / 2
Rated voltage	[V]	32	160	160
Rated surge voltage	[kV]	1.5	2.5	2.5
Nominal current / cross section	[A]/[mm²]	4 / –		
Maximum load current / cross section	[A]/[mm²]	4 / –		
Insulating material		PA		
Inflammability class in acc. with UL 94		V0		
Approval data (UL/CUL and CSA)				
Nominal voltage / current / conductor sizes	UL/CUL: [V]/[AI/AWG CSA: [V]/[AI/AWG	applied for –		





MC 0,5/…-G-2,5 THT R44
2.5 mm Pitch

Note:
COMBICON plug connectors may only be actuated in the no-load condition. If smaller loads need to be switched for operational reasons, experimental values are available on request.

Description	No. of pos.	Dim. a [mm]	Type	Order No.	Pcs./Pkt.
Headers packed in tapes, plug-in direction horizontal to the conductor axis, 2.5 mm pitch, color: black,	2	2.5	**MC 0,5/2-G-2,5 THT R44**	**19 63 64 1**	330
	3	5	**MC 0,5/3-G-2,5 THT R44**	**19 63 65 4**	
	4	7.5	**MC 0,5/4-G-2,5 THT R44**	**19 63 66 7**	
	5	10	**MC 0,5/5-G-2,5 THT R44**	**19 63 67 0**	
	6	12.5	**MC 0,5/6-G-2,5 THT R44**	**19 63 68 3**	
	7	15	**MC 0,5/7-G-2,5 THT R44**	**19 63 69 6**	
	8	17.5	**MC 0,5/8-G-2,5 THT R44**	**19 63 70 6**	
	9	20	**MC 0,5/9-G-2,5 THT R44**	**19 63 71 9**	
	10	22.5	**MC 0,5/10-G-2,5 THT R44**	**19 63 72 2**	
	11	25	**MC 0,5/11-G-2,5 THT R44**	**19 63 73 5**	
	12	27.5	**MC 0,5/12-G-2,5 THT R44**	**19 63 74 8**	
(1) **Coding profile,** is inserted into the groove on the header **after** reflow-soldering, made of red plastic			**CP-MC 0,5**	**18 81 43 5**	100

Technical data				
Dimensions		see description		
Pitch	[mm]	2.5		
Hole diameter	[mm]	≤ 8-pos. = 1.2 / > 8-pos. = 1.3		
Pin dimensions	[mm]	0.8 x 0.8		
Technical data in accordance with IEC/ DIN VDE				
Insulating material group	–	IIIa		
Surge voltage category / contamination class	–/–	III / 3	III / 2	II / 2
Rated voltage	[V]	32	160	160
Rated surge voltage	[kV]	1.5	2.5	2.5
Nominal current / cross section	[A]/[mm²]		4 / –	
Maximum load current / cross section	[A]/[mm²]		4 / –	
Insulating material			PA	
Inflammability class in acc. with UL 94			V0	
Approval data (UL/CUL and CSA)				
Nominal voltage / current / conductor sizes	UL/CUL: [V]/[AI/AWG CSA: [V]/[AI/AWG		applied for –	

MC 0,5/…-G-2,5 THT R44,
Tape width 44 mm, even nos. of positions,
feeder direction

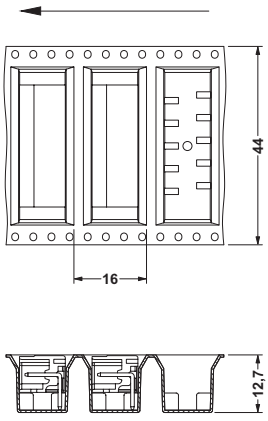

MC 0,5/…-G-2,5 THT R44,
Tape width 44 mm, odd nos. of positions,
feeder direction

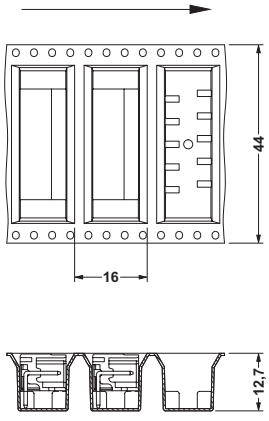

MCV 0,5/…-G-2,5 THT R44
2.5 mm Pitch

Note:
COMBICON plug connectors may only be actuated in the no-load condition. If smaller loads need to be switched for operational reasons, experimental values are available on request.

Description	No. of pos.	Dim. a [mm]	Type	Order No.	Pcs./Pkt.
Headers packed in tapes, plug-in direction vertical to the conductor axis, 2.5 mm pitch, color: black,	2	2.5	**MCV 0,5/2-G-2,5 THT R44**	**19 63 75 1**	330
	3	5	**MCV 0,5/3-G-2,5 THT R44**	**19 63 76 4**	
	4	7.5	**MCV 0,5/4-G-2,5 THT R44**	**19 63 77 7**	
	5	10	**MCV 0,5/5-G-2,5 THT R44**	**19 63 78 0**	
	6	12.5	**MCV 0,5/6-G-2,5 THT R44**	**19 63 79 3**	
	7	15	**MCV 0,5/7-G-2,5 THT R44**	**19 63 80 3**	
	8	17.5	**MCV 0,5/8-G-2,5 THT R44**	**19 63 81 6**	
	9	20	**MCV 0,5/9-G-2,5 THT R44**	**19 63 82 9**	
	10	22.5	**MCV 0,5/10-G-2,5 THT R44**	**19 63 84 5**	
	11	25	**MCV 0,5/11-G-2,5 THT R44**	**19 63 85 8**	
	12	27.5	**MCV 0,5/12-G-2,5 THT R44**	**19 63 86 1**	
(1) **Coding profile,** is inserted into the groove on the header **after** reflow-soldering, made of red plastic			**CP-MC 0,5**	**18 81 43 5**	100

Technical data				
Dimensions		see description		
Pitch	[mm]	2.5		
Hole diameter	[mm]	≤ 8-pos. = 1.2 / > 8-pos. = 1.3		
Pin dimensions	[mm]	0.8 x 0.8		
Technical data in accordance with IEC/ DIN VDE				
Insulating material group	–	IIIa		
Surge voltage category / contamination class	–/–	III / 3	III / 2	II / 2
Rated voltage	[V]	32	160	160
Rated surge voltage	[kV]	1.5	2.5	2.5
Nominal current / cross section	[A]/[mm²]		4 / –	
Maximum load current / cross section	[A]/[mm²]		4 / –	
Insulating material			PA	
Inflammability class in acc. with UL 94			V0	
Approval data (UL/CUL and CSA)				
Nominal voltage / current / conductor sizes	UL/CUL: [V]/[AI/AWG CSA: [V]/[AI/AWG		applied for –	

MCV 0,5/…-G-2,5 THT R44,
Tape width 44 mm, even and odd nos. of positions,
feeder direction

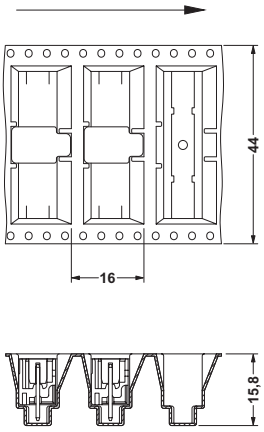

© Phoenix Contact 15.03.03 TNR:5127250-02 http://www.phoenixcontact.com

TradeElectronics.ru

гарантия бесперебойности производства и качества выпускаемой продукции

О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.

Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (XC), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

Trade Electronics.ru

гарантия бесперебойности производства и качества выпускаемой продукции

Перечень производителей, продукцию которых мы поставляем на российский рынок

Trade Electronics.ru

гарантия бесперебойности производства и качества выпускаемой продукции

С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

http://www.tradeelectronics.ru/