

SMT/QuickGrip Connectors


Product Facts

- Solderless Cable Termination
- 3.0 [.118] Mated Height
- Excellent Cable Retention
- Usable With Flexible and Semi-Rigid Micro-Coaxial Cables
- Tape and Reel Packaging

Tyco Electronics revolutionary SMT/QuickGrip product line is designed to meet the growing demand for a reliable, low cost system for direct termination of coax to a printed circuit board (PCB). SMT/QuickGrip technology eliminates the requirement to connectorize the coaxial cable, reducing assembly times and, therefore, cost. The SMT/QuickGrip surface mount device occupies less PCB area than conventional through hole coaxial connectors. An innovative microstrip mounting pattern and cable receptacle design ensures excellent grounding and PCB retention. The SMT/QuickGrip cable termination system stands a mere 3.0 [.118] off the board when mated, allowing for closer pitch/spacing when designing a

system. The SMT/QuickGrip design provides optimal cable retention for applications where shock, vibration, and/or cable flexure may be encountered. This unique RF design accepts both flexible and semi-rigid micro-coaxial cables while delivering exceptional RF performance up to 3GHz.



These features make this system extremely versatile for design engineers and offer a reliable, cost effective alternative to direct soldering of cable to the PCB. The cable is inserted into the device by means of a simple self-aligning hand tool, eliminating the requirement for skilled personnel. This system removes the possibility of damaged PCBs and cables which are common quality issues associated with direct solder, while providing superior RF performance. The SMT/QuickGrip accommodates multiple cable insertions allowing easy replacement of cables for repairs. This receptacle is designed for high volume assembly using surface mount technology and is available in tape and reel packaging for pick and place board assembly. Pre-stripped cables and inter-

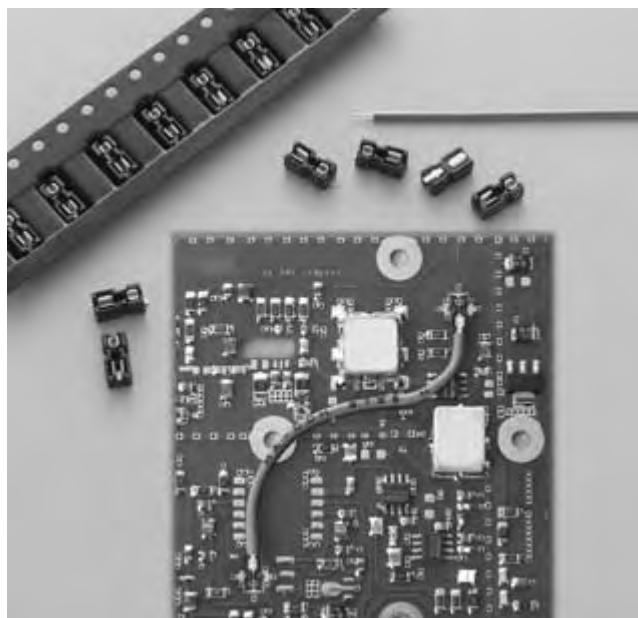

series cable pigtailed are available as turnkey solutions for your application needs (i.e.: for use in multi-board applications, for connecting antennas to the PCB, or point to point transmission on the same PCB).

The SMT/QuickGrip cable termination system is ideal for wireless surface mount applications in handsets, pagers and personal digital assistants (PDA). The SMT/QuickGrip

mechanical and electrical performance, coupled with its ease of use, ensure it to be a high quality, reliable solution for current and future interconnect needs. Tyco Electronics is an ISO9001 certified manufacturer and maintains an SPC controlled manufacturing environment. Please call your local Sales or Distribution office for additional information and qualification samples today.

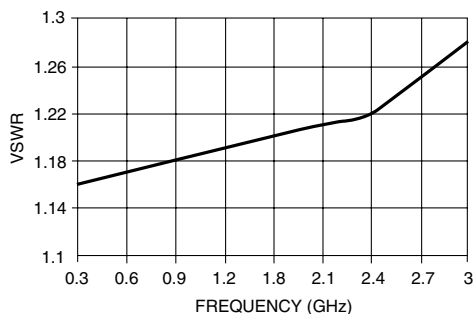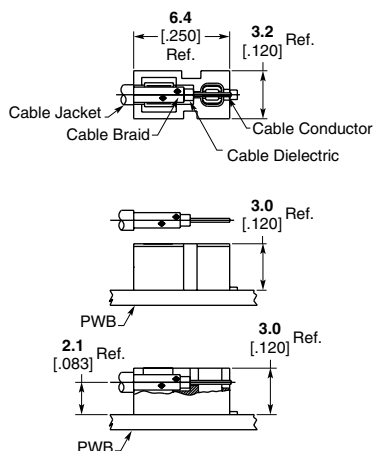

Typical VSWR using SMT/QuickGrip with Omni-Flex 200 Cable

Omni-Flex 200 cable is a Tyco Electronics specified cable.

SMT/QuickGrip Connectors (Continued)

Specifications

General

Materials

Housing:	Polyphenylene Sulfide (PPS)
Contacts:	Copper Alloy

Finishes

Contacts:	Gold Plate over Nickel
-----------	------------------------

Electrical

Frequency Range:	DC - 3GHz
Impedance:	Usable with 50 & 75 Ohm systems
Insertion Loss:	.08 $\sqrt{f}$ GHz
DWV:	750 VRMs
VSWR:	1.3:1 @ 3GHz (Omni-Flex 200 and .047 [.002] Semi-Rigid) 1.4:1 @ 3GHz (.034 [.001] Semi-Rigid)

Mechanical

Connector Durability:	5 mating cycles min. (receptacle only)
Tape and Reel Packaging:	16 [.629] per EIA-481
Force to Disengage by Cam-Out (grams):	Omni-Flex 200 Cable - 543 typical .034 [.001] Semi-Rigid - 852 typical .047 [.002] Semi-Rigid - 1066 typical

Environmental


Temperature Rating:	-40°C(-40°F) to 125°C(257°F) when mated with Omni-Flex 200 Cable
Resistance to Solder Heat:	Infrared, convection, and vapor phase solderable (receptacle only). Maximum reflow time/temperature not to exceed 260°C for 3 minutes.

Cable Information


	Omni-Flex 200 Cable
Materials:	FEP Flexible Cable (200°C)
Jacket:	Fluorinated Ethylene Propylene
Shield:	Silver plated copper wire, 44 AWG, 90% min. coverage
Dielectric:	PTFE (Polytetrafluoroethylene)
Center Conductor:	Silver Plated Copper Clad Steel, 30 AWG
Minimum Bend Radius:	6.35 [.250]
Insertion Loss (PVC and FEP cable only):	1.3dB/m, 0.4 dB/ft. @ 500 MHz 2.0dB/m, 0.5 dB/ft. @ 1 GHz 3.0dB/m, 0.9 dB/ft. @ 2 GHz
Center Conductor Resistance:	.26 Ohms per foot average

Strip Dimensions

Tyco Electronics Omni-Flex 200 Cable Part Number 1407578-1



Semi-Rigid Cable (.034 and .047)





Omni-Flex 200 cable is a
Tyco Electronics specified cable.

Note: Part Numbers are RoHS compliant except: ♦ Indicates non-RoHS compliant.

SMT/QuickGrip Connectors (Continued)

PC Board Mount Receptacle

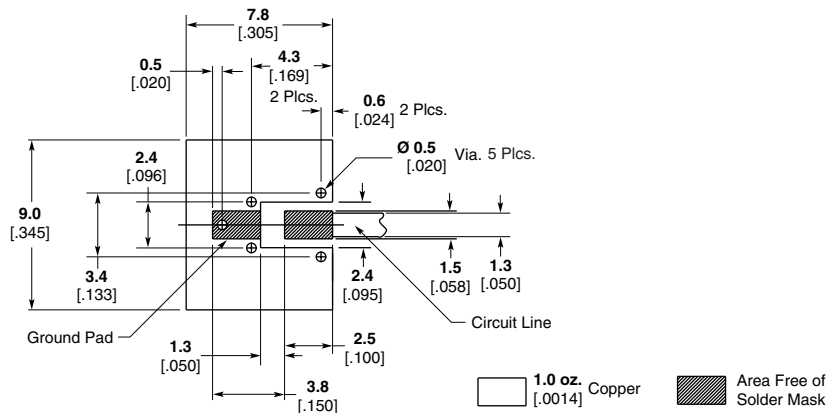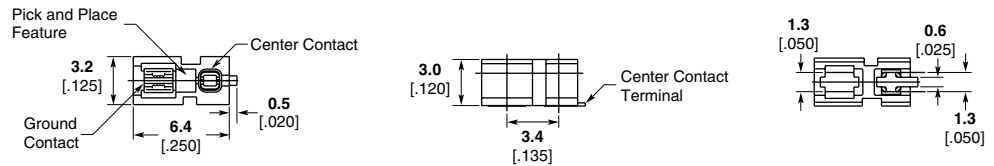

Recommended Mounting Pattern for Microstrip Line

Description	Part No.
Bulk Packaged 100/bag	1085456-1
700 Piece Reel	1086008-1
2000 Piece Reel	1086009-1

1. Printed wiring board material: glass epoxy FR-4 or similar, relative permittivity: 4.8, 1 oz. copper clad both sides.
2. These dimensions valid for 1.6 [.062] board thickness.

Cable Insertion Tool



Part No.
1088313-1


Note: Part Numbers are RoHS compliant except: ♦ Indicates non-RoHS compliant.

SMT/QuickGrip Connectors (Continued)

Inter-Series Cable Assemblies



SMA Straight Plug

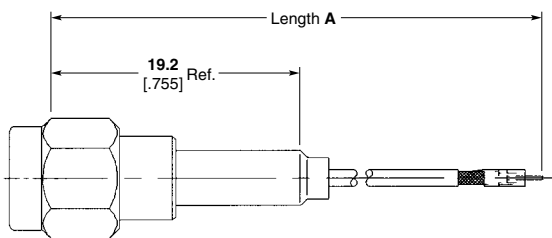


Cable	Assembly Length (A)	Part No.
Omni-Flex 200	100 [4]	1329174-1
	200 [8]	1329174-2
	305 [12]	1310432-1

Note:

1. Cable length tolerances: Length 'A' mm [In], Tolerance mm [In],
50 to 100 [3.94], ± 3 [$\pm .12$], 101 to 500 [3.98 to 19.69], ± 5 [$\pm .20$],
Over 500 [19.69], ± 10 [$\pm .39$]

SMA Bulkhead Jack

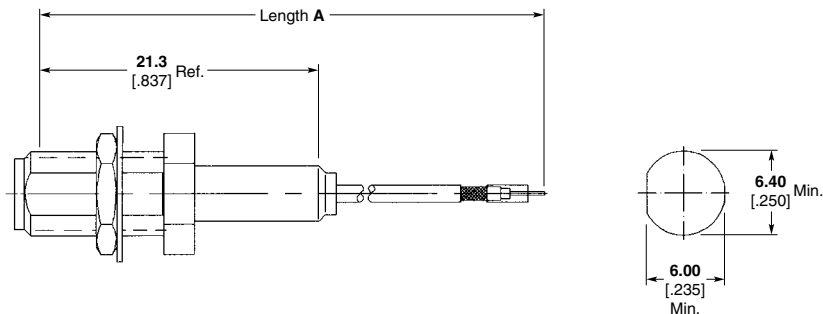

**Recommended
Mounting Hole**

Cable	Assembly Length (A)	Part No.
Omni-Flex 200	100 [4]	1329175-1
	200 [8]	1329175-2
	305 [12]	1329175-3

Note:

1. Cable length tolerances: Length 'A' mm [In], Tolerance mm [In],
50 to 100 [3.94], ± 3 [$\pm .12$], 101 to 500 [3.98 to 19.69], ± 5 [$\pm .20$],
Over 500 [19.69], ± 10 [$\pm .39$]


Omni-Flex 200 cable is a
Tyco Electronics specified cable.

Note: Part Numbers are RoHS compliant except: ♦ Indicates non-RoHS compliant.

SMT/QuickGrip Connectors (Continued)

Inter-Series Cable Assemblies (Continued)

SMB Bulkhead Jack

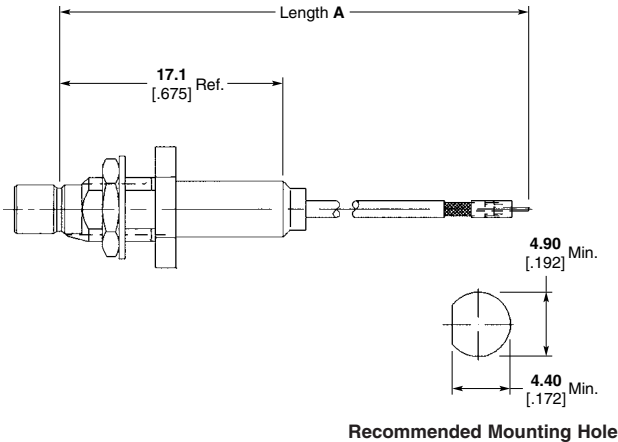


Cable	Assembly Length (A)	Part No.
Omni-Flex 200	100 [4]	1408050-4
	200 [8]	1408050-5
	305 [12]	1408050-6

Note:

- Cable length tolerances: Length 'A' mm [In], Tolerance mm [In], 50 to 100 [3.94], ± 3 [$\pm .12$], 101 to 500 [3.98 to 19.69], ± 5 [$\pm .20$], Over 500 [19.69], ± 10 [$\pm .39$]

SMB Right-Angle Plug

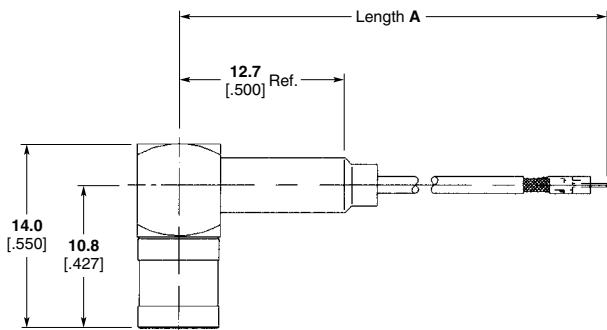


Cable	Assembly Length (A)	Part No.
Omni-Flex 200	100 [4]	1255378-4
	200 [8]	1255378-5
	305 [12]	1255378-6

Note:

- Cable length tolerances: Length 'A' mm [In], Tolerance mm [In], 50 to 100 [3.94], ± 3 [$\pm .12$], 101 to 500 [3.98 to 19.69], ± 5 [$\pm .20$], Over 500 [19.69], ± 10 [$\pm .39$]

MCX Bulkhead Jack

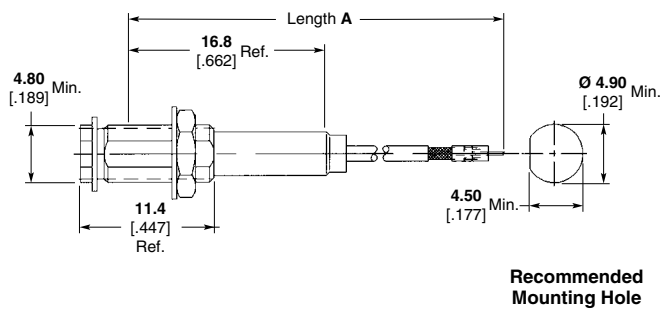


Cable	Assembly Length (A)	Part No.
Omni-Flex 200	100 [4]	1408051-4
	200 [8]	1408051-5
	305 [12]	1408051-6

Note:

- Cable length tolerances: Length 'A' mm [In], Tolerance mm [In], 50 to 100 [3.94], ± 3 [$\pm .12$], 101 to 500 [3.98 to 19.69], ± 5 [$\pm .20$], Over 500 [19.69], ± 10 [$\pm .39$]

MCX Right-Angle Plug

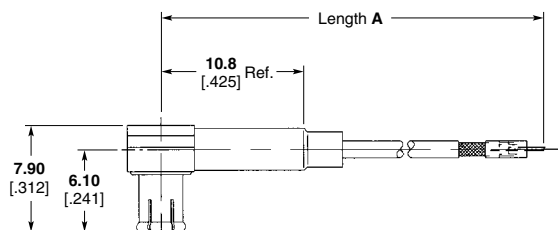

Cable	Assembly Length (A)	Part No.
Omni-Flex 200	100 [4]	1330401-4
	200 [8]	1330401-5
	305 [12]	1330401-6

Note:

- Cable length tolerances: Length 'A' mm [In], Tolerance mm [In], 50 to 100 [3.94], ± 3 [$\pm .12$], 101 to 500 [3.98 to 19.69], ± 5 [$\pm .20$], Over 500 [19.69], ± 10 [$\pm .39$]

Omni-Flex 200 cable is a Tyco Electronics specified cable.

Note: Part Numbers are RoHS compliant except: ♦ Indicates non-RoHS compliant.



О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.

Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (XC), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

Перечень производителей, продукцию которых мы поставляем на российский рынок





Trade Electronics.ru

гарантия бесперебойности производства и
качества выпускаемой продукции

С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

<http://www.tradeelectronics.ru/>