

# Fuse Clips for Printed Circuit Boards

## For ATC, 5mm, 1/4" & 13/32" Diameter Fuses


# 1AXXXX Series

### 1A4534 Series

#### For 1/4" Diameter Fuses

With End Stops & Angled Out Leads

#### Dimensional Data

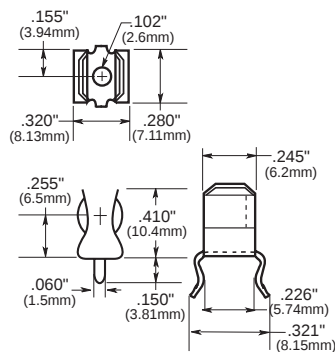


| Catalog Number | Clip Mat.*  | Finish     |
|----------------|-------------|------------|
| 1A4534-01      | BeCu**      | Bright Tin |
| 1A4534-06      | Cart. Brass | Bright Tin |

### 1A4533 Series

#### For 1/4" Diameter Fuses

Without End Stops & Angled Out Leads

#### Dimensional Data

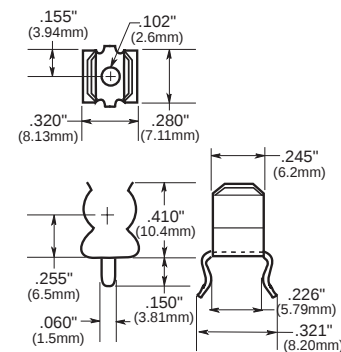


| Catalog Number | Clip Mat.*  | Finish     |
|----------------|-------------|------------|
| 1A4533-01      | BeCu**      | Bright Tin |
| 1A4533-06      | Cart. Brass | Bright Tin |

### 1A1907 Series

#### For 1/4" Diameter Fuses

With End Stops & Straight Leads

#### Dimensional Data




| Catalog Number | Clip Mat.*  | Finish             |
|----------------|-------------|--------------------|
| 1A1907-02      | Cart. Brass | None Bright Dipped |
| 1A1907-03      | BeCu**      | Bright Tin         |
| 1A1907-05      | BeCu**      | Silver             |
| 1A1907-06      | Cart. Brass | Bright Tin         |

### 1A3398 Series

#### For 1/4" Diameter Fuses

Without End Stops & Straight Leads

#### Dimensional Data



| Catalog Number | Clip Mat.*  | Finish     |
|----------------|-------------|------------|
| 1A3398-07      | Cart. Brass | Bright Tin |

\*Spg. Br. - Spring Bronze; BeCu - Beryllium Copper; Cart. Brass - Cartridge Brass

\*\*Beryllium copper recommended for currents higher than 15 amps (1/4" clips).


# Fuse Clips for Printed Circuit Boards

## For ATC, 5mm, 1/4" & 13/32" Diameter Fuses

# 1AXXXX Series

1A3399 and 1A5018 Series  
For 5mm Diameter Fuses  
With Straight Leads


### Dimensional Data




| Catalog Number | Clip Mat.* | Finish     |
|----------------|------------|------------|
| 1A3399-10      | Spg. Br.   | Bright Tin |
| 1A3399-01      | BeCu**     | Silver     |
| 1A3399-04      | BeCu**     | Bright Tin |

### High Profile

| Catalog Number | Clip Mat.* | Finish     |
|----------------|------------|------------|
| 1A5018-10      | Spg. Br.   | Bright Tin |
| 1A5018-7       | Spg. Br.   | Silver     |




1A1119 Series  
For 1/4" Diameter Fuses  
With End Stops and Angled In leads  
Dimensional Data



| Catalog Number | Clip Mat.*  | Finish     |
|----------------|-------------|------------|
| 1A1119-04      | BeCu**      | Bright Tin |
| 1A1119-05      | BeCu**      | Silver     |
| 1A1119-10      | Cart. Brass | Bright Tin |

1A5601 Series  
For 5mm Diameter Fuses (0 to 7 amps)


### Dimensional Data



| Catalog Number | Clip Mat.*  | Finish     |
|----------------|-------------|------------|
| 1A5601         | Cart. Brass | Bright Tin |


1A5602 Series  
For 5mm Diameter Fuses (0 to 7 Amps)

### Dimensional Data



| Catalog Number | Clip Mat.   | Finish     |
|----------------|-------------|------------|
| 1A5602         | Cart. Brass | Bright Tin |

1A1120 Series  
For 1/4" Diameter Fuses  
Without End Stops and Angled In Leads  
Dimensional Data



| Catalog Number | Clip Mat.*  | Finish     |
|----------------|-------------|------------|
| 1A1120-02      | Cart. Brass | Bright Dip |
| 1A1120-05      | BeCu**      | Silver     |
| 1A1120-06      | BeCu**      | Bright Tin |
| 1A1120-09      | Cart. Brass | Bright Tin |


\*Spg. Br. - Spring Bronze; BeCu - Beryllium Copper; Cart. Brass - Cartridge Brass  
\*\*Beryllium copper recommended for currents higher than 15 amps (1/4" clips).

# Fuse Clips for Printed Circuit Boards

## For ATC, 5mm, 1/4" & 13/32" Diameter Fuses


# 1AXXXX Series

### 1A5778 Series

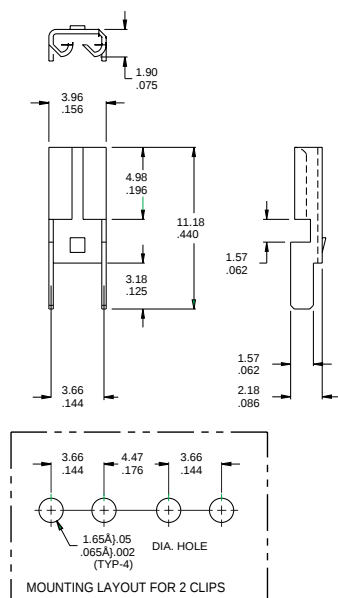

MATERIAL: BRASS, NICKEL PLATED .30 THICK  
.012


### 1A5779 Series

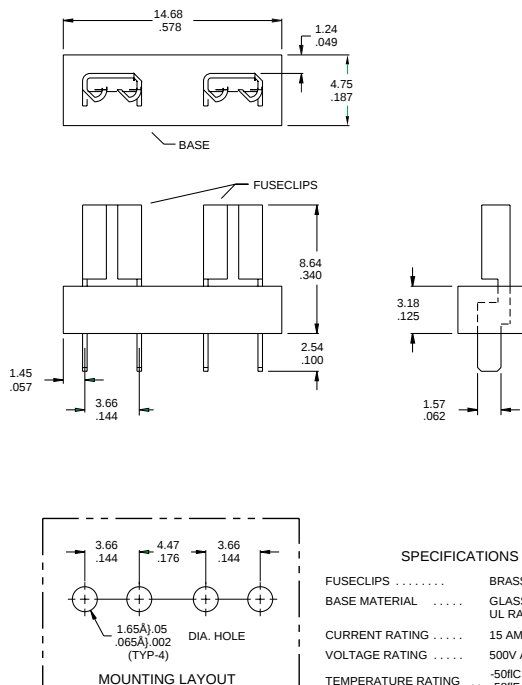

#### SPECIFICATIONS

|                    |                                    |
|--------------------|------------------------------------|
| FUSECLIPS          | BRASS, NICKEL PLATED               |
| BASE MATERIAL      | GLASS FILLED NYLON, UL RATED 94V-0 |
| CURRENT RATING     | 15 AMPS                            |
| VOLTAGE RATING     | 500V AC                            |
| TEMPERATURE RATING | -50°C TO 145°C<br>-58°F TO 292°F   |

### 1A5780 Series

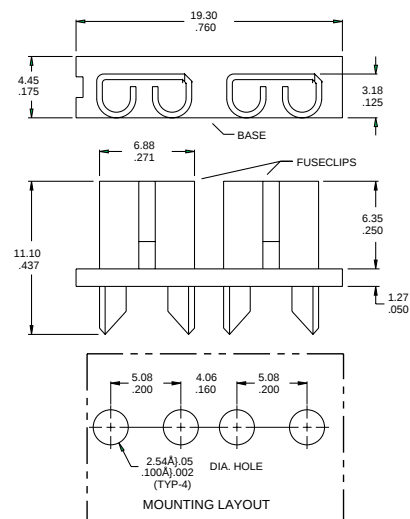

#### SPECIFICATIONS


|                    |                                    |
|--------------------|------------------------------------|
| FUSECLIPS          | BRASS, NICKEL PLATED               |
| BASE MATERIAL      | GLASS FILLED NYLON, UL RATED 94V-0 |
| CURRENT RATING     | 15 AMPS                            |
| VOLTAGE RATING     | 500V AC                            |
| TEMPERATURE RATING | -50°C TO 145°C<br>-58°F TO 292°F   |

### 1A3400 Series

#### For 13/32" Diameter Fuses (20 Amps Maximum)

With End Stops & Straight Leads

#### Dimensional Data




| Catalog Number | Clip Mat.* | Finish     |
|----------------|------------|------------|
| 1A3400-09      | Spg. Br.   | Bright Tin |

### 1A5600 Series

#### For ATC® Fuses (0 to 20 Amps)

#### Dimensional Data

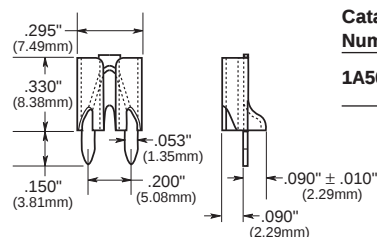

| Catalog Number | Clip Mat.*  | Finish           |
|----------------|-------------|------------------|
| 1A5600         | Cart. Brass | Satin Finish Tin |

\*Spg. Br. - Spring Bronze; BeCu - Beryllium Copper; Cart. Brass - Cartridge Brass

\*\*Beryllium copper recommended for currents higher than 15 amps (1/4" clips).

# Fuse Clips for Printed Circuit Boards


## For ATC, 5mm, 1/4" & 13/32" Diameter Fuses

# 1AXXXX Series

### Fuse Clip Catalog Numbers

### Footprint

### Dimensional Data



| Catalog Number | Dimensions    |                |                 |               |                |                             | ATC          | ATM          | B Tabs                      | C (4 holes)                 | Board Thickness               |
|----------------|---------------|----------------|-----------------|---------------|----------------|-----------------------------|--------------|--------------|-----------------------------|-----------------------------|-------------------------------|
|                | 7/8"          | 1"             | 1 1/4"          | 1 3/8"        | 1 1/2"         | 20mm                        |              |              |                             |                             |                               |
|                | (22.2mm)      | (25.4mm)       | (31.8mm)        | (34.93mm)     | (38.10mm)      |                             |              |              |                             |                             |                               |
| 1A5778-        | —             | —              | —               | —             | —              | —                           | —            | 464" (11.79) | .144" (3.66)                | .065" ± .002" (1.65 ± .05)  | .062" (1.57)                  |
| 1A5779-        | —             | —              | —               | —             | —              | —                           | —            | 464" (11.79) | .144" (3.66)                | .065" ± .002" (1.65 ± .05)  | .062" (1.57)                  |
| 1A5780-        | —             | —              | —               | —             | —              | —                           | .560 (14.22) | —            | .200" (5.08)                | .100" ± .002" (2.54 ± .05)  | .062" (1.57)                  |
| 1A3398-        | 1.00" (25.40) | 1.125" (28.58) | 1.375" (34.920) | —             | —              | —                           | —            | —            | .295" - .305" (7.49 - 7.75) | .067" - .070" (1.70 - 1.78) | .093" (2.36)                  |
| 1A1907-        | 1.00" (25.40) | 1.125" (28.58) | 1.375" (34.920) | —             | —              | —                           | —            | —            | .295" - .305" (7.49 - 7.75) | .093" ± .002" (2.36 ± .05)  | .062" to .125" (1.57 to 3.18) |
| 1A1119-        | 1.00" (25.40) | 1.125" (28.58) | 1.375" (34.920) | —             | —              | —                           | —            | —            | .295" - .305" (7.49 - 7.75) | .093" ± .002" (2.36 ± .05)  | .062" to .125" (1.57 to 3.18) |
| 1A1120-        | 1.00" (25.40) | 1.125" (28.58) | 1.375" (34.920) | —             | —              | —                           | —            | —            | .295" - .305" (7.49 - 7.75) | .093" ± .002" (2.36 ± .05)  | .062" to .125" (1.57 to 3.18) |
| 1A3399-        | —             | —              | —               | —             | —              | .875" (22.23)               | —            | —            | .200" (5.08)                | .067" - .070" (1.70 - 1.78) | .093" (2.36)                  |
| 1A3400-        | —             | —              | —               | 1.50" (38.10) | 1.625" (41.28) | —                           | —            | —            | .405" (10.29)               | .091" - .095" (2.31 - 2.41) | .125" (3.18)                  |
| 1A4533-        | 1.00" (25.40) | 1.125" (28.58) | 1.375" (34.920) | —             | —              | —                           | —            | —            | .300" (7.62)                | .067" - .070" (1.70 - 1.78) | .062" (1.57)                  |
| 1A4534-        | 1.00" (25.40) | 1.125" (28.58) | 1.375" (34.920) | —             | —              | —                           | —            | —            | .300" (7.62)                | .067" - .070" (1.70 - 1.78) | .062" (1.57)                  |
| 1A5018-        | —             | —              | —               | —             | —              | .820" ± .015" (20.80 ± .38) | —            | —            | .180" (4.6)                 | .053" - .002" (1.35 - 0.05) | .093" (2.36)                  |
| 1A5600-        | —             | —              | —               | —             | —              | —                           | —            | —            | .200" (5.08)                | .052" ± .003" (1.32 ± .077) | .125" max. (3.18)             |
| 1A5601-        | —             | —              | —               | —             | —              | .820" ± .015" (20.80 ± .38) | —            | —            | .266" (6.76)                | .067" ± .003" (1.70 ± .074) | .062" (1.57)                  |
| 1A5602-        | —             | —              | —               | —             | —              | —                           | —            | —            | .220" (5.588)               | —                           | .125" max. (3.175)            |

\*Spg. Br. - Spring Bronze; BeCu - Beryllium Copper; Cart. Brass - Cartridge Brass

\*\*Beryllium copper recommended for currents higher than 15 amps (1/4" clips).

The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.



## О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

**Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.**

### Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (XC), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

## Перечень производителей, продукцию которых мы поставляем на российский рынок





Trade Electronics.ru

гарантия бесперебойности производства и  
качества выпускаемой продукции

С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

<http://www.tradeelectronics.ru/>