


## Low Phase Noise VCXO (20MHz to 52MHz)

### FEATURES

- Integrated voltage-controlled crystal oscillator circuitry (VCXO) (pull range 380ppm minimum).
- VCXO tuning range: 0V -  $V_{DD}$ .
- Uses inexpensive fundamental-mode parallel resonant crystals (from 20 to 52MHz).
- 2.5V or 3.3V supply voltage.
- Selectable High Drive (30mA) or Standard Drive (10mA) CMOS output.
- Available in 8-Pin SOIC or TSSOP.

### PIN CONFIGURATION

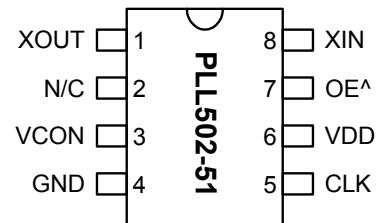

Note: ^ denotes internal pull up


### DESCRIPTION

The PLL502-51 is a monolithic low jitter, high performance CMOS VCXO IC. It allows control of the output frequency with an input voltage (VCON), using a low cost crystal. This makes the PLL502-51 ideal for a wide range of applications from 20MHz to 52MHz (including 27MHz, 35.328MHz, etc.).

### OUTPUT RANGE

| MULTIPLIER | FREQUENCY RANGE | OUTPUT BUFFER |
|------------|-----------------|---------------|
| No PLL     | 20 - 52MHz      | CMOS          |

### BLOCK DIAGRAM

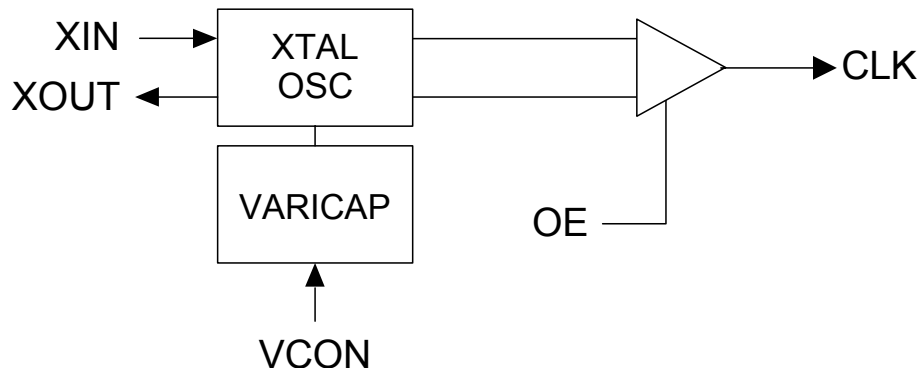

## Low Phase Noise VCXO (20MHz to 52MHz)

### PIN DESCRIPTIONS

| Name | Number | Type | Description                                                                                                                           |
|------|--------|------|---------------------------------------------------------------------------------------------------------------------------------------|
| XOUT | 1      | I    | Crystal output. See Crystal Specification on page 4.                                                                                  |
| N/C  | 2      | -    | Not connected.                                                                                                                        |
| VCON | 3      | I    | Voltage Control input.                                                                                                                |
| GND  | 4      | P    | Ground.                                                                                                                               |
| CLK  | 5      | O    | Output clock.                                                                                                                         |
| VDD  | 6      | P    | Power supply.                                                                                                                         |
| OE   | 7      | I    | Output enable input. Disables (tri-state) output when low. Internal pull-up enables output by default if pin is not connected to low. |
| XIN  | 8      | I    | Crystal input. See Crystal Specification on page 4.                                                                                   |

### ELECTRICAL SPECIFICATIONS

#### 1. Absolute Maximum Ratings

| PARAMETERS                        | SYMBOL   | MIN. | MAX.         | UNITS |
|-----------------------------------|----------|------|--------------|-------|
| Supply Voltage                    | $V_{DD}$ |      | 4.6          | V     |
| Input Voltage, dc                 | $V_I$    | -0.5 | $V_{DD}+0.5$ | V     |
| Output Voltage, dc                | $V_O$    | -0.5 | $V_{DD}+0.5$ | V     |
| Storage Temperature               | $T_S$    | -65  | 150          | °C    |
| Ambient Operating Temperature*    | $T_A$    | -40  | 85           | °C    |
| Junction Temperature              | $T_J$    |      | 125          | °C    |
| Lead Temperature (soldering, 10s) |          |      | 260          | °C    |
| ESD Protection, Human Body Model  |          |      | 2            | kV    |

Exposure of the device under conditions beyond the limits specified by Maximum Ratings for extended periods may cause permanent damage to the device and affect product reliability. These conditions represent a stress rating only, and functional operations of the device at these or any other conditions above the operational limits noted in this specification is not implied.

\* **Note:** Operating Temperature is guaranteed by design for all parts (COMMERCIAL and INDUSTRIAL), but tested for COMMERCIAL grade only.

#### 2. DC Electrical Specifications

| PARAMETERS                                   | SYMBOL   | CONDITIONS                                           | MIN. | TYP. | MAX.     | UNITS |
|----------------------------------------------|----------|------------------------------------------------------|------|------|----------|-------|
| Supply Current, Dynamic, with Loaded Outputs | $I_{DD}$ | $F_{XIN} = 20 - 52\text{MHz}$<br>Output load of 10pF |      | 10   |          | mA    |
| Operating Voltage                            | $V_{DD}$ |                                                      | 2.25 |      | 3.63     | V     |
| Output drive current (High Drive)            | $I_{OH}$ | $V_{OH} = V_{DD}-0.4V, V_{DD}=3.3V$                  | 30   |      |          | mA    |
|                                              | $I_{OL}$ | $V_{OL} = 0.4V, V_{DD} = 3.3V$                       | 30   |      |          | mA    |
| Output drive current (Standard Drive)        | $I_{OH}$ | $V_{OH} = V_{DD}-0.4V, V_{DD}=3.3V$                  | 10   |      |          | mA    |
|                                              | $I_{OL}$ | $V_{OL} = 0.4V, V_{DD} = 3.3V$                       | 10   |      |          | mA    |
| Short Circuit Current                        |          |                                                      |      | ±50  |          | mA    |
| VCXO Control Voltage                         | VCON     |                                                      | 0    |      | $V_{DD}$ | V     |

## Low Phase Noise VCXO (20MHz to 52MHz)

### 3. AC Electrical Specifications

| PARAMETERS                                   | SYMBOL | CONDITIONS                     | MIN. | TYP. | MAX. | UNITS |
|----------------------------------------------|--------|--------------------------------|------|------|------|-------|
| Input Crystal Frequency                      |        |                                | 20   |      | 52   | MHz   |
| Output Clock Rise/Fall Time (Standard Drive) |        | 0.3V ~ 3.0V with 15 pF load    |      | 2.4  |      | ns    |
| Output Clock Rise/Fall Time (High Drive)     |        | 0.3V ~ 3.0V with 15 pF load    |      | 1.2  |      |       |
| Output Clock Duty Cycle                      |        | Measured @ 50% V <sub>DD</sub> | 45   | 50   | 55   | %     |

### 4. Voltage Control Crystal Oscillator (3.3V)

| PARAMETERS                 | SYMBOL               | CONDITIONS                                                                                      | MIN. | TYP. | MAX. | UNITS |
|----------------------------|----------------------|-------------------------------------------------------------------------------------------------|------|------|------|-------|
| VCXO Stabilization Time *  | T <sub>VCXOSTB</sub> | From power valid                                                                                |      |      | 10   | ms    |
| VCXO Tuning Range          |                      | F <sub>XIN</sub> = 20 - 52MHz;<br>XTAL C <sub>0</sub> /C <sub>1</sub> < 250<br>0V ≤ VCON ≤ 3.3V |      | 500  |      | ppm   |
| CLK output pullability     |                      | VCON=1.65V ±1.65V                                                                               | ±200 |      |      | ppm   |
| VCXO Tuning Characteristic |                      |                                                                                                 |      | 150  |      | ppm/V |
| Pull range linearity       |                      |                                                                                                 |      |      | 10   | %     |
| VCON input impedance       |                      |                                                                                                 |      | 80   |      | kΩ    |
| VCON modulation BW         |                      | 0V ≤ VCON ≤ 3.3V, -3dB                                                                          | 25   |      |      | kHz   |

**Note:** Parameters denoted with an asterisk (\*) represent nominal characterization data and are not production tested to any specific limits.

### 5. Jitter Specifications

| PARAMETERS                 | CONDITIONS                               | MIN. | TYP. | MAX. | UNITS |
|----------------------------|------------------------------------------|------|------|------|-------|
| Period jitter RMS          | 35.328 MHz                               |      | 2.3  |      | ps    |
| Period jitter peak-to-peak | 35.328MHz                                |      | 18   |      | ps    |
| Integrated jitter RMS      | Integrated 12 kHz to 20 MHz at 35.328MHz |      | 1    |      | ps    |

### 6. Phase Noise Specifications

| PARAMETERS                      | FREQUENCY | @10Hz | @100Hz | @1kHz | @10kHz | @100kHz | UNITS  |
|---------------------------------|-----------|-------|--------|-------|--------|---------|--------|
| Phase Noise relative to carrier | 51.85MHz  | -65   | -90    | -120  | -140   | -147    | dBc/Hz |

Note: Phase Noise at VCON = 0V

## Low Phase Noise VCXO (20MHz to 52MHz)

### 7. Crystal Specifications


| PARAMETERS                  | SYMBOL           | CONDITIONS                | MIN. | TYP. | MAX. | UNITS    |
|-----------------------------|------------------|---------------------------|------|------|------|----------|
| Crystal Resonator Frequency | $F_{XIN}$        | Parallel Fundamental Mode | 20   |      | 52   | MHz      |
| Crystal Loading Rating      | $C_L$ (xtal)     | At $V_{con} = 1.65V$      |      | 9.5  |      | pF       |
| Crystal Pullability         | $C_0/C_1$ (xtal) | AT cut                    |      |      | 250  | -        |
| Recommended ESR             | $R_E$            | AT cut                    |      |      | 30   | $\Omega$ |

**Note:** Crystal Loading rating: 9.5pF is the loading the crystal sees from the VCXO chip at  $V_{CON} = 1.65V$ . It is assumed that the crystal will be at nominal frequency at this load. If the crystal requires more load to be at nominal frequency, the additional load must be added externally. This however may reduce the pull range

### PACKAGE INFORMATION

8 PIN ( dimensions in mm )

|        | Narrow SOIC |      | TSSOP    |      |
|--------|-------------|------|----------|------|
| Symbol | Min.        | Max. | Min.     | Max. |
| A      | 1.47        | 1.73 | -        | 1.20 |
| A1     | 0.10        | 0.25 | 0.05     | 0.15 |
| B      | 0.33        | 0.51 | 0.19     | 0.30 |
| C      | 0.19        | 0.25 | 0.09     | 0.20 |
| D      | 4.80        | 4.95 | 2.90     | 3.10 |
| E      | 3.80        | 4.00 | 4.30     | 4.50 |
| H      | 5.80        | 6.20 | 6.20     | 6.60 |
| L      | 0.38        | 1.27 | 0.45     | 0.75 |
| e      | 1.27 BSC    |      | 0.65 BSC |      |

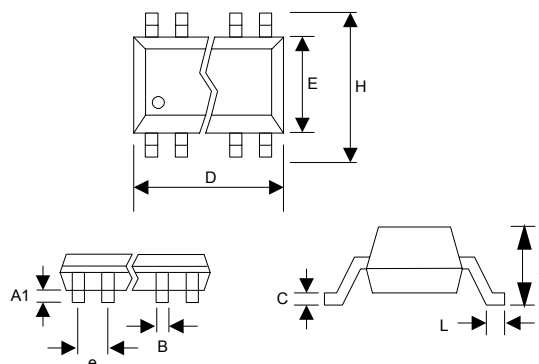

**Low Phase Noise VCXO (20MHz to 52MHz)**

**ORDERING INFORMATION**


**For part ordering, please contact our Sales Department:**

47745 Fremont Blvd., Fremont, CA 94538, USA

Tel: (510) 492-0990 Fax: (510) 492-0991

**PART NUMBER**

The order number for this device is a combination of the following:  
Device number, Package type and Operating temperature range

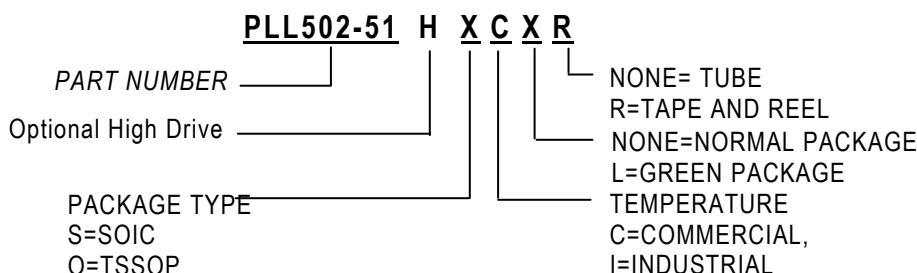

| Order Number    | Marking     | Package Option               |
|-----------------|-------------|------------------------------|
| PLL502-51OC     | P502-51OC   | TSSOP – Tube                 |
| PLL502-51OC-R   | P502-51OC   | TSSOP - Tape and Reel        |
| PLL502-51OCL    | P502-51OCL  | TSSOP – Tube, GREEN          |
| PLL502-51OCL-R  | P502-51OCL  | TSSOP - Tape and Reel, GREEN |
| PLL502-51HOC    | P502-51HOC  | TSSOP – Tube                 |
| PLL502-51HOC-R  | P502-51HOC  | TSSOP - Tape and Reel        |
| PLL502-51HOCL   | P502-51HOCL | TSSOP – Tube, GREEN          |
| PLL502-51HOCL-R | P502-51HOCL | TSSOP - Tape and Reel, GREEN |
| PLL502-51SC     | P502-51SC   | SOIC - Tube                  |
| PLL502-51SC-R   | P502-51SC   | SOIC - Tape and Reel         |
| PLL502-51SCL    | P502-51SCL  | SOIC – Tube, GREEN           |
| PLL502-51SCL-R  | P502-51SCL  | SOIC - Tape and Reel, GREEN  |
| PLL502-51HSC    | P502-51HSC  | SOIC - Tube                  |
| PLL502-51HSC-R  | P502-51HSC  | SOIC - Tape and Reel         |
| PLL502-51HSCL   | P502-51HSCL | SOIC – Tube, GREEN           |
| PLL502-51HSCL-R | P502-51HSCL | SOIC - Tape and Reel, GREEN  |

PhaseLink Corporation, reserves the right to make changes in its products or specifications, or both at any time without notice. The information furnished by Phaselink is believed to be accurate and reliable. However, PhaseLink makes no guarantee or warranty concerning the accuracy of said information and shall not be responsible for any loss or damage of whatever nature resulting from the use of, or reliance upon this product.

**LIFE SUPPORT POLICY:** PhaseLink's products are not authorized for use as critical components in life support devices or systems without the express written approval of the President of PhaseLink Corporation.



## О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

**Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.**


### **Наша компания это:**

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (XC), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

## Перечень производителей, продукцию которых мы поставляем на российский рынок





Trade Electronics.ru

гарантия бесперебойности производства и  
качества выпускаемой продукции

С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

<http://www.tradeelectronics.ru/>