


Glass Passivated Power Voltage-Regulating Diodes



DO-204AL (DO-41)

FEATURES

- Plastic MELF package
- Ideal for automated placement
- Glass passivated chip junction
- Low Zener impedance
- Low regulation factor
- Solder dip 260 °C, 40 s
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC



RoHS
COMPLIANT

TYPICAL APPLICATIONS

For general purpose regulation and protection applications.

MECHANICAL DATA

Case: DO-204AL (DO-41)

Molding compound meets UL 94 V-0 flammability rating

Base P/N-E3 - RoHS compliant, commercial grade

Base P/NHE3 - RoHS compliant, high reliability/automotive grade (AEC Q101 qualified)

Terminals: Matte tin plated leads, solderable per J-STD-002 and JESD22-B102

E3 suffix meets JESD 201 class 1A whisker test, HE3 suffix meets JESD 201 class 2 whisker test

Polarity: Color band denotes cathode end

PRIMARY CHARACTERISTICS

V_Z	100 V to 200 V
P_D	1.5 W
I_R	0.5 μ A
T_J max.	150 °C

MAXIMUM RATINGS ($T_A = 25$ °C unless otherwise noted)

PARAMETER	SYMBOL	VALUE	UNIT
Operating junction and storage temperature range	T_J, T_{STG}	- 55 to + 150	°C

ELECTRICAL CHARACTERISTICS ($T_A = 25$ °C unless otherwise noted)

TYPE	ZENER VOLTAGE AT 5.0 mA		MAXIMUM ZENER DYNAMIC IMPEDANCE				MAXIMUM DC REVERSE LEAKAGE CURRENT AT V_R			MAXIMUM INSTANTANEOUS FORWARD VOLTAGE AT 0.50 A	MAXIMUM CONTINUOUS REGULATOR CURRENT (2)
	V_Z (V)		I_{ZT}	Z_{ZT}	I_{ZK}	Z_{ZK}	V_R	I_R AT 25 °C	I_R AT 100 °C	V_{FM}	I_{ZM}
	MIN.	MAX.	(mA)	(Ω)	(mA)	(Ω)	(V)	(μ A)	(μ A)	(V)	(mA)
Z4KE100	90	110	5.0	500	0.25	5000	72.0	0.5	100	1.0	15.0
Z4KE100A	95	105	5.0	500	0.25	5000	76.0	0.5	100	1.0	15.0
Z4KE110	99	121	5.0	600	0.25	5000	79.2	0.5	100	1.0	13.0
Z4KE110A	104	116	5.0	600	0.25	5000	83.2	0.5	100	1.0	13.0
Z4KE120	108	132	5.0	700	0.25	5000	86.4	0.5	100	1.0	12.0
Z4KE120A	114	126	5.0	700	0.25	5000	91.2	0.5	100	1.0	12.0
Z4KE130	117	143	5.0	800	0.25	5000	93.6	0.5	100	1.0	11.0
Z4KE130A	124	137	5.0	800	0.25	5000	99.2	0.5	100	1.0	11.0

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

TYPE	ZENER VOLTAGE AT 5.0 mA		MAXIMUM ZENER DYNAMIC IMPEDANCE				MAXIMUM DC REVERSE LEAKAGE CURRENT AT V_R			MAXIMUM INSTANTANEOUS FORWARD VOLTAGE AT 0.50 A	MAXIMUM CONTINUOUS REGULATOR CURRENT ⁽²⁾
	V_Z (V)		I_{ZT}	Z_{ZT}	I_{ZK}	Z_{ZK}	V_R	I_R AT 25°C	I_R AT 100°C	V_{FM}	I_{ZM}
	MIN.	MAX.	(mA)	(Ω)	(mA)	(Ω)	(V)	(μA)	(μA)	(V)	(mA)
Z4KE140	126	154	5.0	900	0.25	5000	100	0.5	100	1.0	10.7
Z4KE140A	133	147	5.0	900	0.25	5500	106.4	0.5	100	1.0	10.7
Z4KE150	135	165	5.0	1000	0.25	6000	108.0	0.5	100	1.0	10.0
Z4KE150A	142	158	5.0	1000	0.25	6000	113.6	0.5	100	1.0	10.0
Z4KE160	144	176	5.0	1100	0.25	6500	115.2	0.5	100	1.0	9.0
Z4KE160A	152	168	5.0	1100	0.25	6500	121.6	0.5	100	1.0	9.0
Z4KE170	153	187	5.0	1200	0.25	7000	122.4	0.5	100	1.0	8.8
Z4KE170A	162	179	5.0	1200	0.25	7000	129.6	0.5	100	1.0	8.0
Z4KE180	162	198	5.0	1300	0.25	7000	129.6	0.5	100	1.0	8.0
Z4KE180A	171	189	5.0	1300	0.25	7000	136.8	0.5	100	1.0	8.0
Z4KE190	171	209	5.0	1400	0.25	7500	136.8	0.5	100	1.0	7.9
Z4KE190A	180	200	5.0	1400	0.25	7500	144.0	0.5	100	1.0	7.9
Z4KE200	180	220	5.0	1500	0.25	8000	144.0	0.5	100	1.0	7.0
Z4KE200A	190	210	5.0	1500	0.25	8000	152.0	0.5	100	1.0	7.0

Notes:

- (1) Standard voltage tolerance is $\pm 10\%$, suffix "A" is $\pm 5\%$
 (2) Maximum power dissipation is 1.5 W at $T_L = 75^\circ\text{C}$ with lead length 0.375" (9.5 mm)

ORDERING INFORMATION (Example)

PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
Z4KE100-E3/54	0.350	54	5500	13" diameter paper tape and reel
Z4KE100HE3/54 ⁽¹⁾	0.350	54	5500	13" diameter paper tape and reel

Note:

- (1) Automotive grade AEC Q101 qualified

RATINGS AND CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

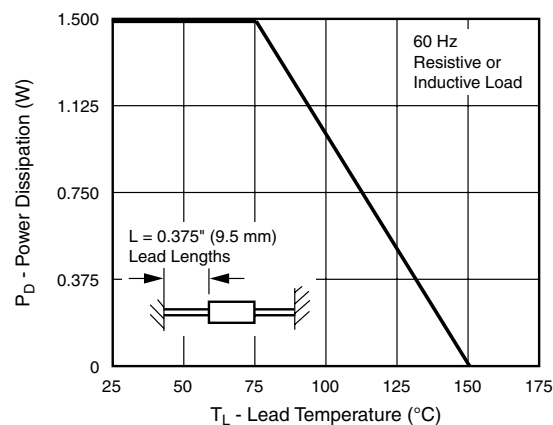


Figure 1. Power Derating Curve

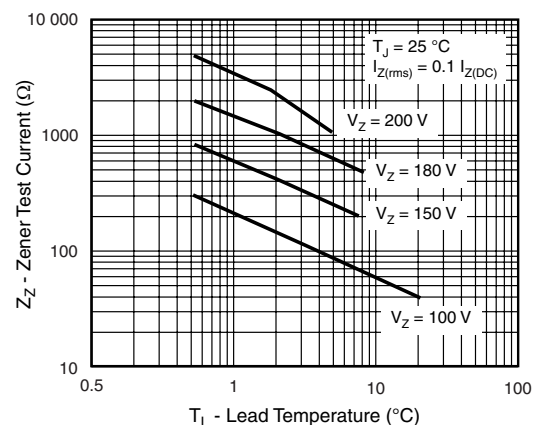


Figure 2. Typical Zener Impedance

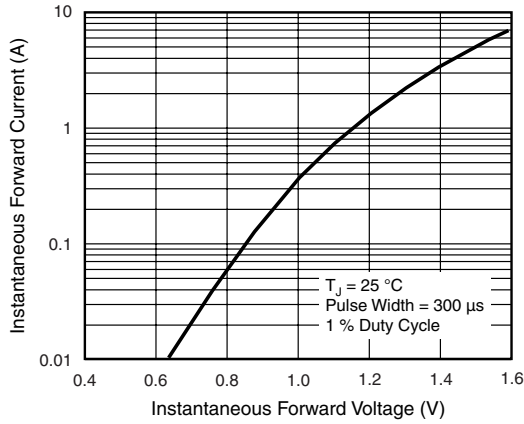


Figure 3. Typical Instantaneous Forward Characteristics

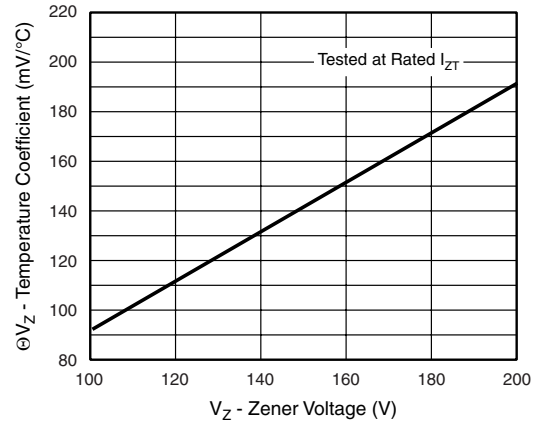


Figure 5. Typical Temperature Coefficients

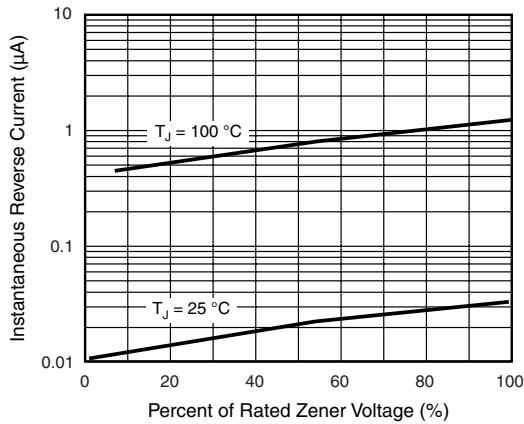


Figure 4. Typical Reverse Characteristics


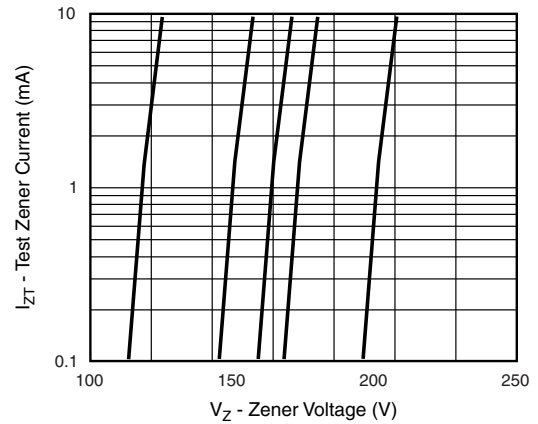


Figure 6. Typical Zener Voltage

PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

DO-204AL (DO-41)



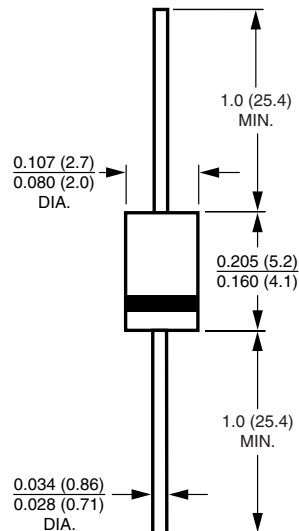

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.



О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.


Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (XC), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

Перечень производителей, продукцию которых мы поставляем на российский рынок





Trade Electronics.ru

гарантия бесперебойности производства и
качества выпускаемой продукции

С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

<http://www.tradeelectronics.ru/>