

# FQA36P15 / FQA36P15\_F109 150V P-Channel MOSFET

## Features



- -36A, -150V,  $R_{DS(on)} = 0.09\Omega$  @  $V_{GS} = -10V$
- Low gate charge ( typical 81 nC)
- Low  $C_{rss}$  ( typical 110pF)
- Fast switching
- 100% avalanche tested
- Improved dv/dt capability
- 175°C maximum junction temperature rating



## Description

These P-Channel enhancement mode power field effect transistors are produced using Fairchild's proprietary, planar stripe, DMOS technology.

This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode. These devices are well suited for high efficient switched mode power supplies, active power factor correction, electronic lamp ballast based on half bridge topology.



## Absolute Maximum Ratings

| Symbol         | Parameter                                                                     | FQA36P15    | Units               |
|----------------|-------------------------------------------------------------------------------|-------------|---------------------|
| $V_{DSS}$      | Drain-Source Voltage                                                          | -150        | V                   |
| $I_D$          | Drain Current - Continuous ( $T_C = 25^\circ\text{C}$ )                       | -36         | A                   |
|                | - Continuous ( $T_C = 100^\circ\text{C}$ )                                    | -25.5       | A                   |
| $I_{DM}$       | Drain Current - Pulsed (Note 1)                                               | -144        | A                   |
| $V_{GSS}$      | Gate-Source Voltage                                                           | $\pm 30$    | V                   |
| $E_{AS}$       | Single Pulsed Avalanche Energy (Note 2)                                       | 1400        | mJ                  |
| $I_{AR}$       | Avalanche Current (Note 1)                                                    | -36         | A                   |
| $E_{AR}$       | Repetitive Avalanche Energy (Note 1)                                          | 29.4        | mJ                  |
| dv/dt          | Peak Diode Recovery dv/dt (Note 3)                                            | -5.0        | V/ns                |
| $P_D$          | Power Dissipation ( $T_C = 25^\circ\text{C}$ )                                | 294         | W                   |
|                | - Derate above $25^\circ\text{C}$                                             | 1.96        | W/ $^\circ\text{C}$ |
| $T_J, T_{STG}$ | Operating and Storage Temperature Range                                       | -55 to +175 | $^\circ\text{C}$    |
| $T_L$          | Maximum lead temperature for soldering purposes, 1/8" from case for 5 seconds | 300         | $^\circ\text{C}$    |

## Thermal Characteristics

| Symbol          | Parameter                               | Typ  | Max  | Units              |
|-----------------|-----------------------------------------|------|------|--------------------|
| $R_{\theta JC}$ | Thermal Resistance, Junction-to-Case    | --   | 0.51 | $^\circ\text{C/W}$ |
| $R_{\theta CS}$ | Thermal Resistance, Case-to-Sink        | 0.24 | --   | $^\circ\text{C/W}$ |
| $R_{\theta JA}$ | Thermal Resistance, Junction-to-Ambient | --   | 40   | $^\circ\text{C/W}$ |

## Package Marking and Ordering Information

| Device Marking | Device        | Package | Reel Size | Tape Width | Quantity |
|----------------|---------------|---------|-----------|------------|----------|
| FQA36P15       | FQA36P15      | TO-3P   | --        | --         | 30       |
| FQA36P15       | FQA36P15_F109 | TO-3PN  | --        | --         | 30       |

## Electrical Characteristics T<sub>C</sub> = 25°C unless otherwise noted

| Symbol                                                 | Parameter                                             | Test Conditions                                                                                | Min  | Typ   | Max  | Units |
|--------------------------------------------------------|-------------------------------------------------------|------------------------------------------------------------------------------------------------|------|-------|------|-------|
| Off Characteristics                                    |                                                       |                                                                                                |      |       |      |       |
| BV <sub>DSS</sub>                                      | Drain-Source Breakdown Voltage                        | V <sub>GS</sub> = 0 V, I <sub>D</sub> = -250 μA                                                | -150 | --    | --   | V     |
| ΔBV <sub>DSS</sub> /<br>ΔT <sub>J</sub>                | Breakdown Voltage Temperature Coefficient             | I <sub>D</sub> = -250 μA, Referenced to 25°C                                                   | --   | -0.13 | --   | V/°C  |
| I <sub>DSS</sub>                                       | Zero Gate Voltage Drain Current                       | V <sub>DS</sub> = -150 V, V <sub>GS</sub> = 0 V                                                | --   | --    | -10  | μA    |
|                                                        |                                                       | V <sub>DS</sub> = -120 V, T <sub>C</sub> = 150°C                                               | --   | --    | -100 | μA    |
| I <sub>GSSF</sub>                                      | Gate-Body Leakage Current, Forward                    | V <sub>GS</sub> = -25 V, V <sub>DS</sub> = 0 V                                                 | --   | --    | -100 | nA    |
| I <sub>GSSR</sub>                                      | Gate-Body Leakage Current, Reverse                    | V <sub>GS</sub> = 25 V, V <sub>DS</sub> = 0 V                                                  | --   | --    | 100  | nA    |
| On Characteristics                                     |                                                       |                                                                                                |      |       |      |       |
| V <sub>GS(th)</sub>                                    | Gate Threshold Voltage                                | V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> = -250 μA                                   | -2.0 | --    | -4.0 | V     |
| R <sub>DS(on)</sub>                                    | Static Drain-Source On-Resistance                     | V <sub>GS</sub> = -10 V, I <sub>D</sub> = -18A                                                 | --   | 0.076 | 0.09 | Ω     |
| g <sub>FS</sub>                                        | Forward Transconductance                              | V <sub>DS</sub> = -40 V, I <sub>D</sub> = -18A (Note 4)                                        | --   | 19.5  | --   | S     |
| Dynamic Characteristics                                |                                                       |                                                                                                |      |       |      |       |
| C <sub>iss</sub>                                       | Input Capacitance                                     | V <sub>DS</sub> = -25 V, V <sub>GS</sub> = 0 V,<br>f = 1.0 MHz                                 | --   | 2550  | 3320 | pF    |
| C <sub>oss</sub>                                       | Output Capacitance                                    |                                                                                                | --   | 710   | 920  | pF    |
| C <sub>rss</sub>                                       | Reverse Transfer Capacitance                          |                                                                                                | --   | 110   | 140  | pF    |
| Switching Characteristics                              |                                                       |                                                                                                |      |       |      |       |
| t <sub>d(on)</sub>                                     | Turn-On Delay Time                                    | V <sub>DD</sub> = -75 V, I <sub>D</sub> = -36A,<br>R <sub>G</sub> = 25 Ω<br><br>(Note 4, 5)    | --   | 50    | 110  | ns    |
| t <sub>r</sub>                                         | Turn-On Rise Time                                     |                                                                                                | --   | 350   | 710  | ns    |
| t <sub>d(off)</sub>                                    | Turn-Off Delay Time                                   |                                                                                                | --   | 155   | 320  | ns    |
| t <sub>f</sub>                                         | Turn-Off Fall Time                                    |                                                                                                | --   | 150   | 310  | ns    |
| Q <sub>g</sub>                                         | Total Gate Charge                                     | V <sub>DS</sub> = -120 V, I <sub>D</sub> = -36A,<br>V <sub>GS</sub> = -10 V<br><br>(Note 4, 5) | --   | 81    | 105  | nC    |
| Q <sub>gs</sub>                                        | Gate-Source Charge                                    |                                                                                                | --   | 19    | --   | nC    |
| Q <sub>gd</sub>                                        | Gate-Drain Charge                                     |                                                                                                | --   | 42    | --   | nC    |
| Drain-Source Diode Characteristics and Maximum Ratings |                                                       |                                                                                                |      |       |      |       |
| I <sub>S</sub>                                         | Maximum Continuous Drain-Source Diode Forward Current |                                                                                                | --   | --    | -36  | A     |
| I <sub>SM</sub>                                        | Maximum Pulsed Drain-Source Diode Forward Current     |                                                                                                | --   | --    | -144 | A     |
| V <sub>SD</sub>                                        | Drain-Source Diode Forward Voltage                    | V <sub>GS</sub> = 0 V, I <sub>S</sub> = -36A                                                   | --   | --    | -4.0 | V     |
| t <sub>rr</sub>                                        | Reverse Recovery Time                                 | V <sub>GS</sub> = 0 V, I <sub>S</sub> = -36 A,<br>dI <sub>F</sub> / dt = 100 A/μs (Note 4)     | --   | 198   | --   | ns    |
| Q <sub>rr</sub>                                        | Reverse Recovery Charge                               |                                                                                                | --   | 1.45  | --   | μC    |

### NOTES:

1. Repetitive Rating : Pulse width limited by maximum junction temperature
2. L = 1.45mH, I<sub>AS</sub> = -36A, V<sub>DD</sub> = -50V, R<sub>G</sub> = 25 Ω, Starting T<sub>J</sub> = 25°C
3. I<sub>SD</sub> ≤ -36A, di/dt ≤ 300A/μs, V<sub>DD</sub> ≤ BV<sub>DSS</sub>, Starting T<sub>J</sub> = 25°C
4. Pulse Test : Pulse width ≤ 300μs, Duty cycle ≤ 2%
5. Essentially independent of operating temperature

## Typical Performance Characteristics

Figure 1. On-Region Characteristics

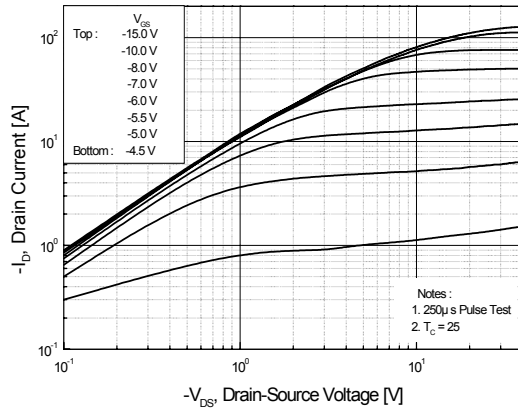


Figure 2. Transfer Characteristics

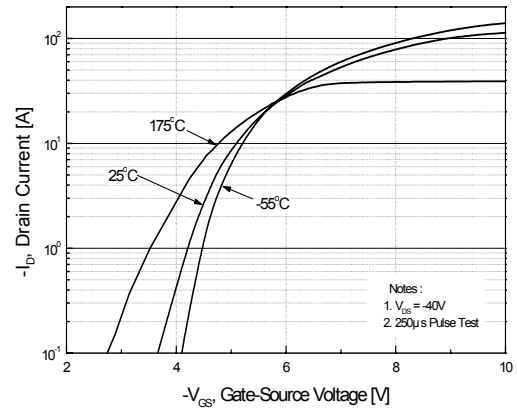


Figure 3. On-Resistance Variation vs. Drain Current and Gate Voltage

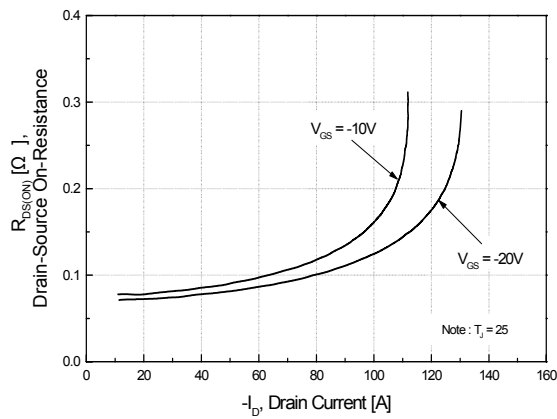


Figure 4. Body Diode Forward Voltage Variation vs. Source Current and Temperature

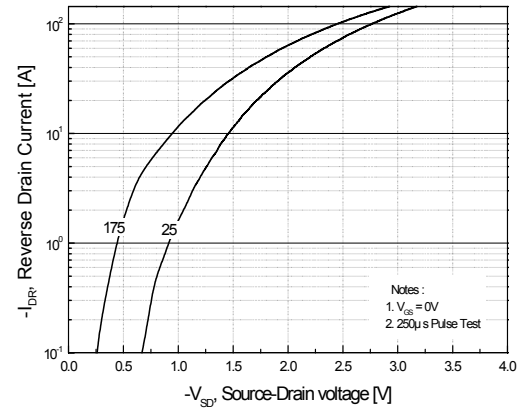


Figure 5. Capacitance Characteristics



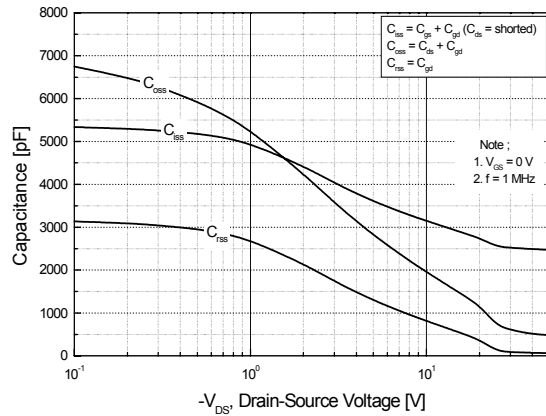


Figure 6. Gate Charge Characteristics

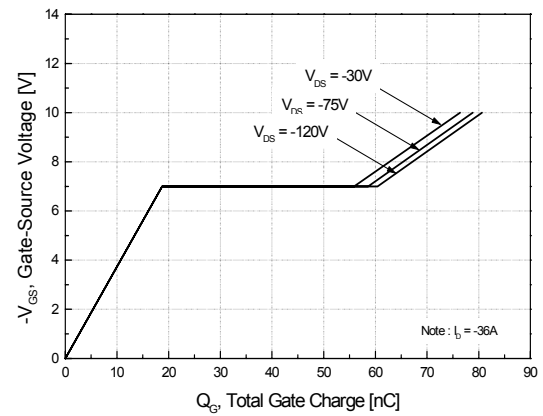


## Typical Performance Characteristics (Continued)


**Figure 7. Breakdown Voltage Variation vs. Temperature**

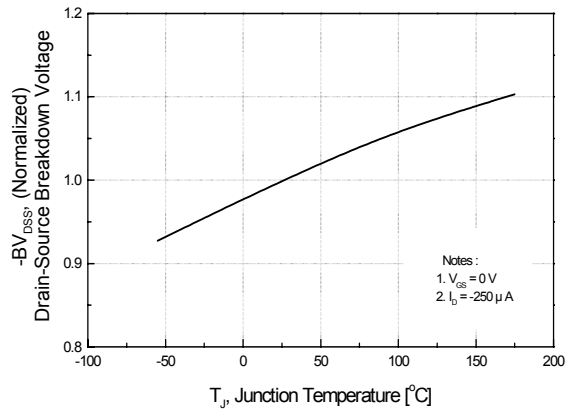


**Figure 8. On-Resistance Variation vs. Temperature**

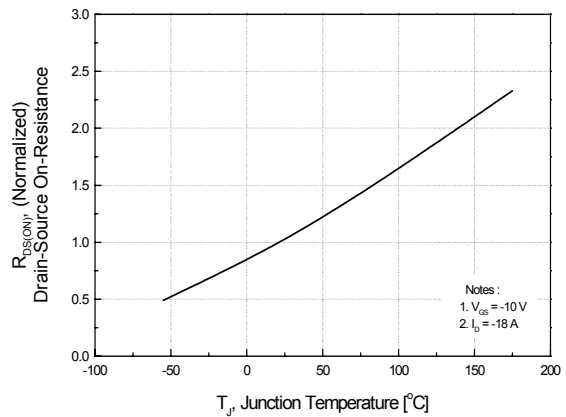


**Figure 9. Maximum Safe Operating Area**

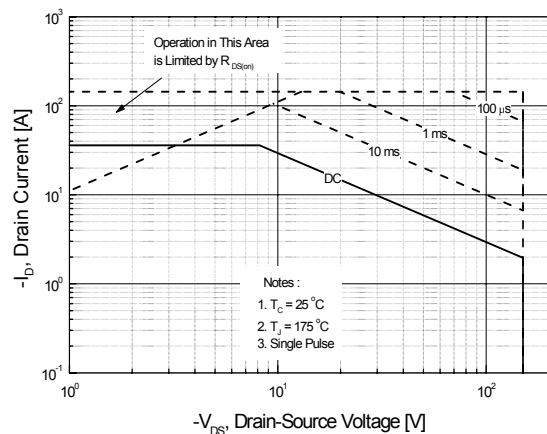


**Figure 10. Maximum Drain Current vs. Case Temperature**

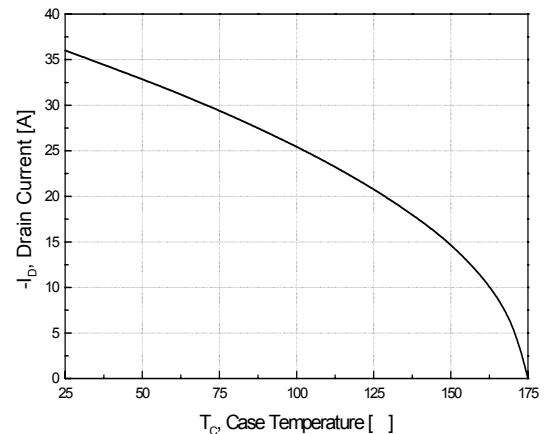


**Figure 11. Transient Thermal Response Curve**

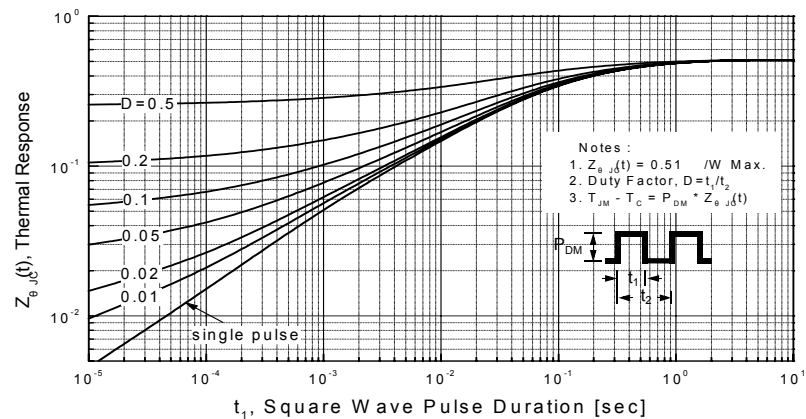


**Gate Charge Test Circuit & Waveform**

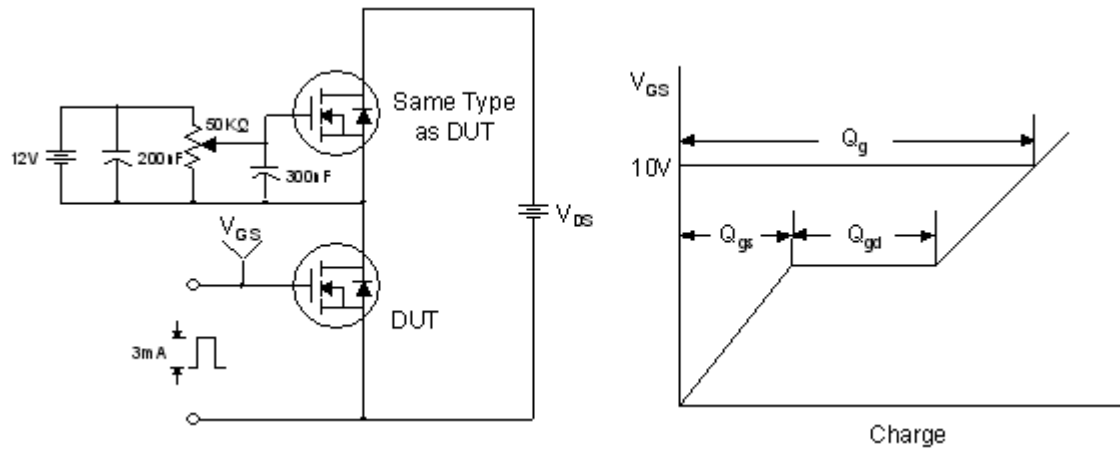

**Resistive Switching Test Circuit & Waveforms**

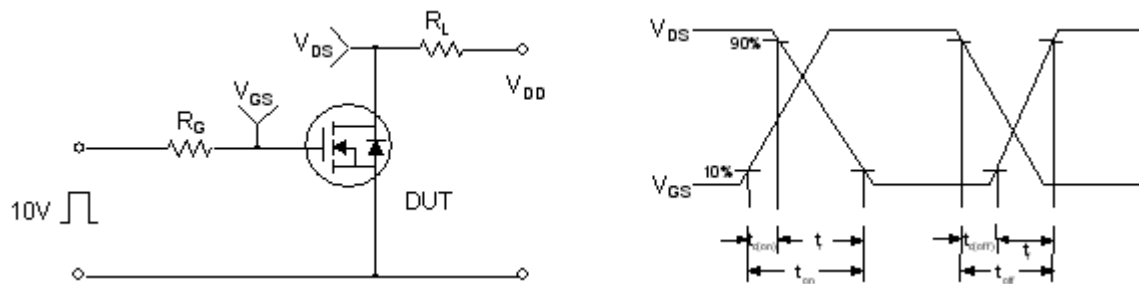

**Unclamped Inductive Switching Test Circuit & Waveforms**

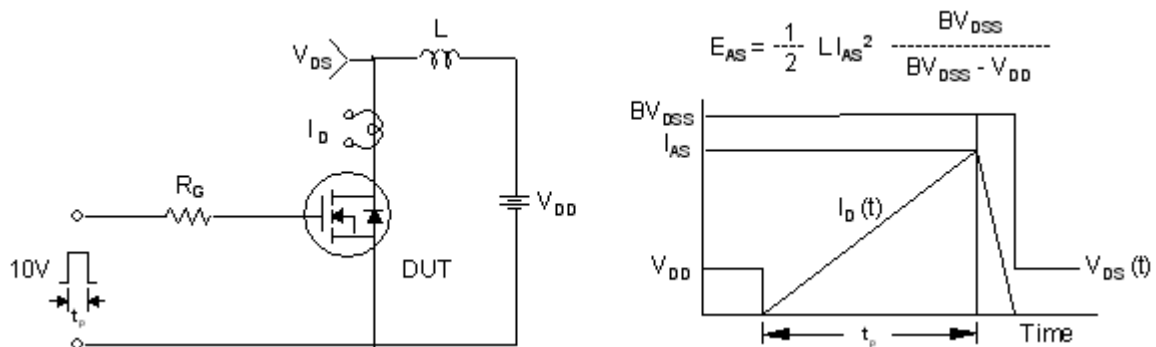


### Peak Diode Recovery dv/dt Test Circuit & Waveforms



## Mechanical Dimensions

## TO-3P

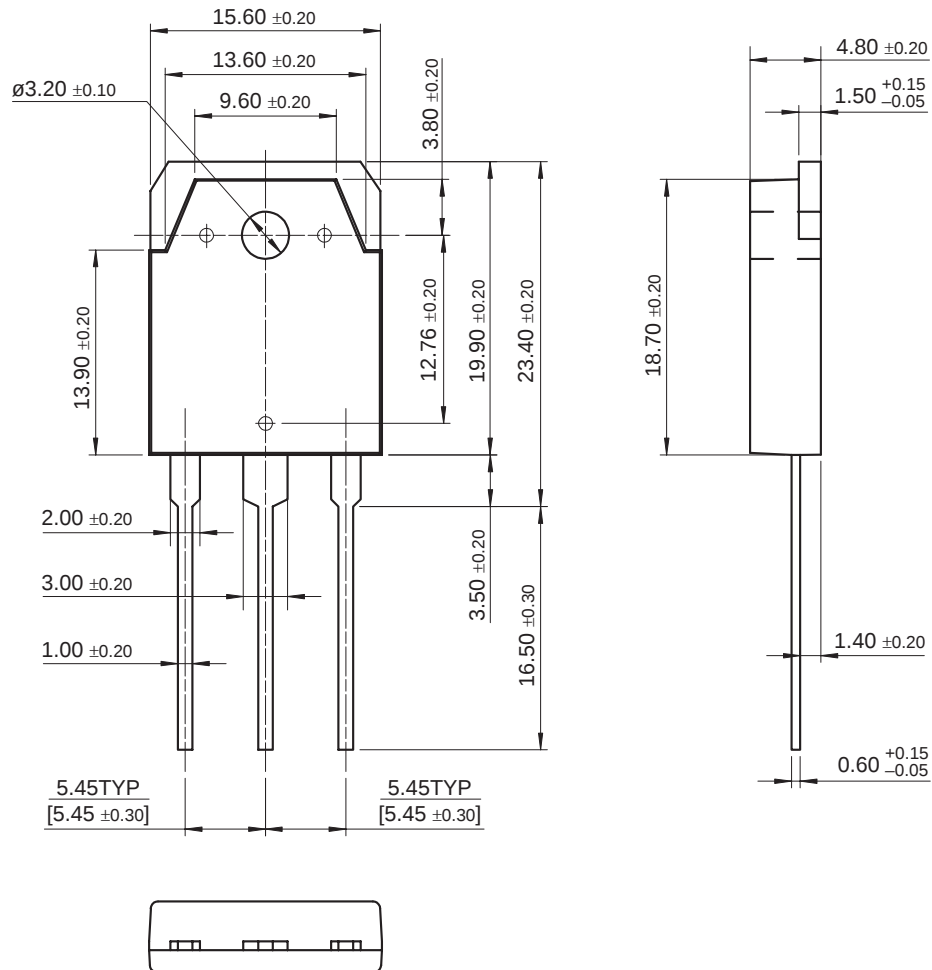

Dimensions in Millimeters





## TRADEMARKS

The following are registered and unregistered trademarks and service marks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

|                                      |                                              |                                        |                                  |
|--------------------------------------|----------------------------------------------|----------------------------------------|----------------------------------|
| ACE <sup>®</sup>                     | Green FPS <sup>™</sup>                       | Power247 <sup>®</sup>                  | SuperSOT <sup>™</sup> -8         |
| Build it Now <sup>™</sup>            | Green FPS <sup>™</sup> e-Series <sup>™</sup> | POWEREDGE <sup>®</sup>                 | SyncFET <sup>™</sup>             |
| CorePLUS <sup>™</sup>                | GTO <sup>™</sup>                             | Power-SPM <sup>™</sup>                 | The Power Franchise <sup>®</sup> |
| CROSSVOLT <sup>™</sup>               | i-Lo <sup>™</sup>                            | PowerTrench <sup>®</sup>               | the power franchise              |
| CTL <sup>™</sup>                     | IntelliMAX <sup>™</sup>                      | Programmable Active Droop <sup>™</sup> | TinyBoost <sup>™</sup>           |
| Current Transfer Logic <sup>™</sup>  | ISOPANAR <sup>™</sup>                        | QFET <sup>®</sup>                      | TinyBuck <sup>™</sup>            |
| EcoSPARK <sup>®</sup>                | MegaBuck <sup>™</sup>                        | QS <sup>™</sup>                        | TinyLogic <sup>®</sup>           |
| F <sup>®</sup>                       | MICROCOUPLER <sup>™</sup>                    | QT Optoelectronics <sup>™</sup>        | TINYOPTO <sup>™</sup>            |
| Fairchild <sup>®</sup>               | MicroFET <sup>™</sup>                        | Quiet Series <sup>™</sup>              | TinyPower <sup>™</sup>           |
| Fairchild Semiconductor <sup>®</sup> | MicroPak <sup>™</sup>                        | RapidConfigure <sup>™</sup>            | TinyPWM <sup>™</sup>             |
| FACT Quiet Series <sup>™</sup>       | Motion-SPM <sup>™</sup>                      | SMART START <sup>™</sup>               | TinyWire <sup>™</sup>            |
| FACT <sup>®</sup>                    | OPTOLOGIC <sup>®</sup>                       | SPM <sup>®</sup>                       | μSerDes <sup>™</sup>             |
| FAST <sup>®</sup>                    | OPTOPLANAR <sup>®</sup>                      | STEALTH <sup>™</sup>                   | UHC <sup>®</sup>                 |
| FastvCore <sup>™</sup>               | ®                                            | SuperFET <sup>™</sup>                  | UniFET <sup>™</sup>              |
| FPS <sup>™</sup>                     | PDP-SPM <sup>™</sup>                         | SuperSOT <sup>™</sup> -3               | VCX <sup>™</sup>                 |
| FRFET <sup>®</sup>                   | Power220 <sup>®</sup>                        | SuperSOT <sup>™</sup> -6               |                                  |
| Global Power Resource <sup>SM</sup>  |                                              |                                        |                                  |

## DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
- A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## PRODUCT STATUS DEFINITIONS

### Definition of Terms

| Datasheet Identification | Product Status         | Definition                                                                                                                                                                                               |
|--------------------------|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Advance Information      | Formative or In Design | This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.                                                                       |
| Preliminary              | First Production       | This datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design. |
| No Identification Needed | Full Production        | This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.                                                   |
| Obsolete                 | Not In Production      | This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.                                      |

Rev. I30



## О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

**Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.**

### Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (XC), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

## Перечень производителей, продукцию которых мы поставляем на российский рынок





# Trade Electronics.ru

гарантия бесперебойности производства и  
качества выпускаемой продукции

С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

<http://www.tradeelectronics.ru/>