

# CS8363

## 3.3 V Dual Micropower Regulator with ENABLE and RESET

The CS8363 is a precision Micropower dual voltage regulator with ENABLE and RESET.

The 3.3 V standby output is accurate within  $-2\%$ ,  $+2.4\%$  while supplying loads of 100 mA. Quiescent current is low, typically 140  $\mu\text{A}$  with a 300  $\mu\text{A}$  load. The active RESET output monitors the 3.3 V standby output and is low during power-up and regulator dropout conditions. The RESET circuit includes hysteresis and is guaranteed to operate correctly with 1.0 V on the standby output.

The second output tracks the 3.3 V standby output through an external adjust lead, and can supply loads of 250 mA. The logic level lead ENABLE is used to control this tracking regulator output.

Both outputs are protected against overvoltage, short circuit, reverse battery and overtemperature conditions. The robustness and low quiescent current of the CS8363 makes it not only well suited for automotive microprocessor applications, but for any battery powered microprocessor applications.


### Features

- 2 Regulated Outputs
  - Standby Output 3.3 V  $-2\%$ ,  $+2.4\%$ ; 100 mA
  - Adjustable Tracking Output; 250 mA
- Operation down to  $V_{\text{IN}} = 4.5\text{ V}$
- RESET for  $V_{\text{STBY}}$
- ENABLE for  $V_{\text{TRK}}$
- Low Quiescent Current
- Protection Features
  - Independent Thermal Shutdown
  - Short Circuit
  - 60 V Load Dump
  - Reverse Battery



ON Semiconductor®


<http://onsemi.com>



D<sup>2</sup>PAK-7  
DPS SUFFIX  
CASE 936AB

Pin 1.  $V_{\text{STBY}}$   
2.  $V_{\text{IN}}$   
3.  $V_{\text{TRK}}$   
4. GND  
5. Adj  
6. ENABLE  
7. RESET

### MARKING DIAGRAM



A = Assembly Location  
WL = Wafer Lot  
Y = Year  
WW = Work Week

### ORDERING INFORMATION\*

| Device       | Package              | Shipping <sup>†</sup> |
|--------------|----------------------|-----------------------|
| CS8363YDPS7  | D <sup>2</sup> PAK-7 | 50 Units/Rail         |
| CS8363YDPSR7 | D <sup>2</sup> PAK-7 | 750 Tape & Reel       |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

# CS8363

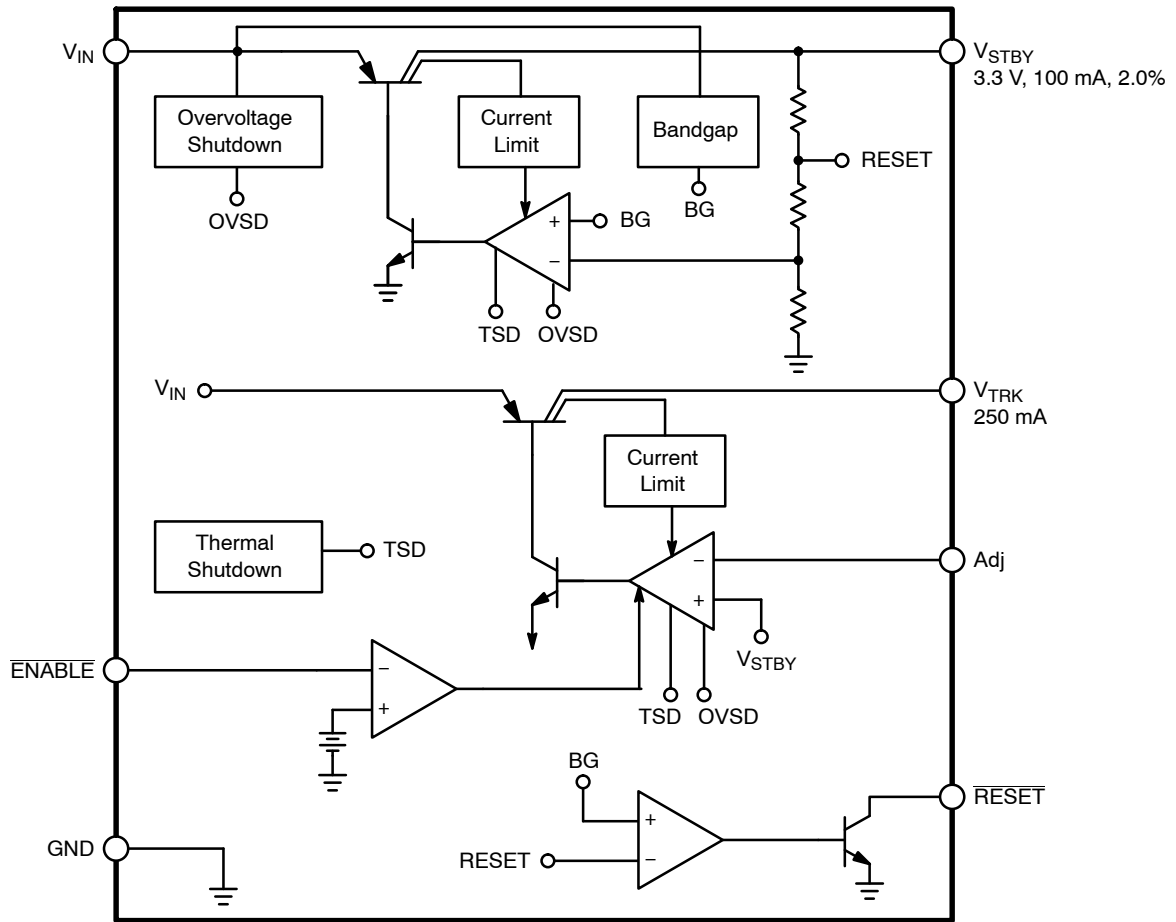


Figure 1. Block Diagram. Consult Your Local Sales Representative for Positive ENABLE Option

## ABSOLUTE MAXIMUM RATINGS\*

| Rating                                                           | Value                                                                            | Unit                             |
|------------------------------------------------------------------|----------------------------------------------------------------------------------|----------------------------------|
| Supply Voltage, $V_{IN}$                                         | -16 to 26                                                                        | V                                |
| Positive Transient Input Voltage, $t_r > 1.0$ ms                 | 60                                                                               | V                                |
| Negative Transient Input Voltage, $T < 100$ ms, 1.0 % Duty Cycle | -50                                                                              | V                                |
| Input Voltage Range (ENABLE, RESET)                              | -0.3 to 10                                                                       | V                                |
| Junction Temperature                                             | -40 to +150                                                                      | °C                               |
| Storage Temperature Range                                        | -55 to +150                                                                      | °C                               |
| ESD Susceptibility (Human Body Model)                            | 2.0                                                                              | kV                               |
| Lead Temperature Soldering                                       | Wave Solder (through hole styles only) Note 1<br>Reflow (SMD styles only) Note 2 | 260 peak<br>230 peak<br>°C<br>°C |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. 10 seconds max.

2. 60 seconds max above 183°C

\*The maximum package power dissipation must be observed.

**ELECTRICAL CHARACTERISTICS** ( $6.0\text{ V} \leq V_{IN} \leq 26\text{ V}$ ,  $I_{OUT1} = I_{OUT2} = 100\text{ }\mu\text{A}$ ,  $-40^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$ ; unless otherwise stated.)

| Characteristic                                    | Test Conditions                                                                                                    | Min | Typ | Max  | Unit          |
|---------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|-----|-----|------|---------------|
| <b>Tracking Output (<math>V_{TRK}</math>)</b>     |                                                                                                                    |     |     |      |               |
| $V_{TRK}$ Tracking Error ( $V_{STBY} - V_{TRK}$ ) | $6.0\text{ V} \leq V_{IN} \leq 26\text{ V}$ , $100\text{ }\mu\text{A} \leq I_{TRK} \leq 250\text{ mA}$ .<br>Note 3 | -25 | -   | +25  | mV            |
| Adjust Pin Current, $I_{Adj}$                     | Loop in Regulation                                                                                                 | -   | 1.5 | 5.0  | $\mu\text{A}$ |
| Line Regulation                                   | $6.0\text{ V} \leq V_{IN} \leq 26\text{ V}$ . Note 3                                                               | -   | 5.0 | 50   | mV            |
| Load Regulation                                   | $100\text{ }\mu\text{A} \leq I_{TRK} \leq 250\text{ mA}$ . Note 3                                                  | -   | 5.0 | 50   | mV            |
| Dropout Voltage ( $V_{IN} - V_{TRK}$ )            | $I_{TRK} = 100\text{ }\mu\text{A}$ .<br>$I_{TRK} = 250\text{ mA}$                                                  | -   | -   | 1.05 | mV            |
|                                                   |                                                                                                                    | -   | -   | 1.05 | mV            |
| Current Limit                                     | $V_{IN} = 12\text{ V}$ , $V_{TRK} = 3.0\text{ V}$                                                                  | 275 | 500 | -    | mA            |
| Quiescent Current                                 | $V_{IN} = 12\text{ V}$ , $I_{TRK} = 250\text{ mA}$ , No Load on $V_{STBY}$                                         | -   | 25  | 50   | mA            |
|                                                   | $V_{IN} = 12\text{ V}$ , $I_{TRK} = 500\text{ }\mu\text{A}$ , $I_{STBY} = 100\text{ }\mu\text{A}$                  | -   | 145 | 220  | $\mu\text{A}$ |
| Reverse Current                                   | $V_{TRK} = 3.3\text{ V}$ , $V_{IN} = 0\text{ V}$                                                                   | -   | 200 | 1500 | $\mu\text{A}$ |
| Ripple Rejection                                  | $f = 120\text{ Hz}$ , $I_{TRK} = 250\text{ mA}$ , $7.0\text{ V} \leq V_{IN} \leq 17\text{ V}$                      | 60  | 70  | -    | dB            |

**Standby Output ( $V_{STBY}$ )**

|                                         |                                                                                                                                                                         |       |     |       |               |
|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-----|-------|---------------|
| Output Voltage, $V_{STBY}$              | $4.5\text{ V} \leq V_{IN} \leq 26\text{ V}$ , $100\text{ }\mu\text{A} \leq I_{STBY} \leq 100\text{ mA}$ .                                                               | 3.234 | 3.3 | 3.380 | V             |
| Line Regulation                         | $6.0\text{ V} \leq V_{IN} \leq 26\text{ V}$ .                                                                                                                           | -     | 5.0 | 50    | mV            |
| Load Regulation                         | $100\text{ }\mu\text{A} \leq I_{STBY} \leq 100\text{ mA}$ .                                                                                                             | -     | 5.0 | 50    | mV            |
| Dropout Voltage ( $V_{IN} - V_{STBY}$ ) | $I_{STBY} = 100\text{ }\mu\text{A}$ , $V_{IN} = 4.2\text{ V}$<br>$I_{STBY} = 100\text{ mA}$ , $V_{IN} = 4.2\text{ V}$                                                   | -     | -   | 1.05  | V             |
|                                         |                                                                                                                                                                         | -     | -   | 1.05  | V             |
| Current Limit                           | $V_{IN} = 12\text{ V}$ , $V_{STBY} = 3.0\text{ V}$                                                                                                                      | 125   | 200 | -     | mA            |
| Short Circuit Current                   | $V_{IN} = 12\text{ V}$ , $V_{STBY} = 0\text{ V}$                                                                                                                        | 10    | 100 | -     | mA            |
| Quiescent Current                       | $V_{IN} = 12\text{ V}$ , $I_{STBY} = 100\text{ mA}$ , $I_{TRK} = 0\text{ mA}$<br>$V_{IN} = 12\text{ V}$ , $I_{STBY} = 300\text{ }\mu\text{A}$ , $I_{TRK} = 0\text{ mA}$ | -     | 10  | 20    | mA            |
|                                         |                                                                                                                                                                         | -     | 140 | 200   | $\mu\text{A}$ |
| Reverse Current                         | $V_{STBY} = 3.3\text{ V}$ , $V_{IN} = 0\text{ V}$                                                                                                                       | -     | 100 | 200   | $\mu\text{A}$ |
| Ripple Rejection                        | $f = 120\text{ Hz}$ , $I_{STBY} = 100\text{ mA}$ , $7.0\text{ V} \leq V_{IN} \leq 17\text{ V}$                                                                          | 60    | 70  | -     | dB            |

**RESET ENABLE Functions**

|                                     |                                                                          |      |     |      |               |
|-------------------------------------|--------------------------------------------------------------------------|------|-----|------|---------------|
| ENABLE Input Threshold              | -                                                                        | 0.8  | 1.2 | 2.0  | V             |
| ENABLE Input Bias Current           | $V_{ENABLE} = 0\text{ V to }10\text{ V}$                                 | -10  | 0   | 10   | $\mu\text{A}$ |
| RESET Hysteresis                    | -                                                                        | 10   | 50  | 150  | mV            |
| RESET Threshold Low ( $V_{RL}$ )    | $V_{STBY}$ Decreasing, $V_{IN} > 4.5\text{ V}$                           | 92.5 | 95  | 97.5 | % $V_{STBY}$  |
| RESET Leakage                       | -                                                                        | -    | -   | 25   | $\mu\text{A}$ |
| Output Voltage, Low ( $V_{RLO}$ )   | $1.0\text{ V} \leq V_{STBY} \leq V_{RL}$ , $R_{RST} = 10\text{ k}\Omega$ | -    | 0.1 | 0.4  | V             |
| Output Voltage, Low ( $V_{RPEAK}$ ) | $V_{STBY}$ , Power Up, Power Down                                        | -    | 0.6 | 1.0  | V             |
| $V_{IN}$ ( $V_{RST}$ Low)           | $V_{STBY} = 3.3\text{ V}$                                                | -    | 4.0 | 4.5  | V             |

**Protection Circuitry (Both Outputs)**

|                              |            |     |     |    |                    |
|------------------------------|------------|-----|-----|----|--------------------|
| Independent Thermal Shutdown | $V_{STBY}$ | 150 | 180 | -  | $^{\circ}\text{C}$ |
|                              | $V_{TRK}$  | 150 | 165 | -  | $^{\circ}\text{C}$ |
| Overvoltage Shutdown         | -          | 30  | 34  | 38 | V                  |

3.  $V_{TRK}$  connected to Adj lead.  $V_{TRK}$  can be set to higher values by using an external resistor divider.

## PACKAGE PIN DESCRIPTION

| PACKAGE PIN #        |                   |                                                                                                                                                                            |
|----------------------|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| D <sup>2</sup> PAK-7 | PIN SYMBOL        | FUNCTION                                                                                                                                                                   |
| 1                    | V <sub>STBY</sub> | Standby output voltage delivering 100 mA.                                                                                                                                  |
| 2                    | V <sub>IN</sub>   | Input voltage.                                                                                                                                                             |
| 3                    | V <sub>TRK</sub>  | Tracking output voltage controlled by ENABLE delivering 250 mA.                                                                                                            |
| 4                    | GND               | Reference ground connection.                                                                                                                                               |
| 5                    | Adj               | Resistor divider from V <sub>TRK</sub> to Adj. Sets the output voltage on V <sub>TRK</sub> . If tied to V <sub>TRK</sub> , V <sub>TRK</sub> will track V <sub>STBY</sub> . |
| 6                    | ENABLE            | Provides on/off control of the tracking output, active LOW.                                                                                                                |
| 7                    | RESET             | CMOS compatible output lead that goes low whenever V <sub>STBY</sub> falls out of regulation.                                                                              |

## CIRCUIT DESCRIPTION

**ENABLE Function**

The **ENABLE** function switches the output transistor for V<sub>TRK</sub> on and off. When the **ENABLE** lead voltage exceeds 1.4 V (Typ), V<sub>TRK</sub> turns off. This input has several hundred millivolts of hysteresis to prevent spurious output activity during power-up or power-down.

**RESET Function**


The **RESET** is an open collector NPN transistor, controlled by a low voltage detection circuit sensing the V<sub>STBY</sub> (3.3 V) output voltage. This circuit guarantees the **RESET** output stays below 1.0 V (0.1 V Typ) when V<sub>STBY</sub> is as low as 1.0 V to ensure reliable operation of microprocessor-based systems.

**V<sub>TRK</sub> Output Voltage**

This output uses the same type of output device as V<sub>STBY</sub>, but is rated for 250 mA. The output is configured as a tracking regulator of the standby output. By using the standby output as a voltage reference, giving the user an external programming lead (Adj lead), output voltages from 3.3 V to 20 V are easily realized. The programming is done with a simple resistor divider, and following the formula:

$$V_{TRK} = V_{STBY} \times (1 + R1/R2) + I_{Adj} \times R1$$

If another 3.3 V output is needed, simply connect the Adj lead to the V<sub>TRK</sub> output lead.

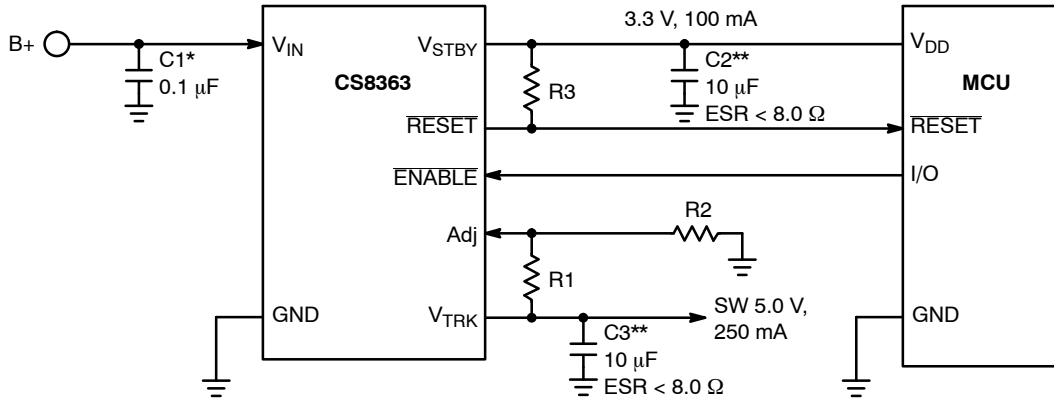

$$V_{TRK} \sim V_{STBY}(1 + R1/R2)$$


For V<sub>TRK</sub> ~ 5.0 V, R1/R2 ~ 0.5

\*C1 is required if regulator is located far from power supply filter.

\*\*C2 and C3 are required for stability.

**Figure 2. Test and Application Circuit, 3.3 V, 5.0 V Regulator**

## CS8363

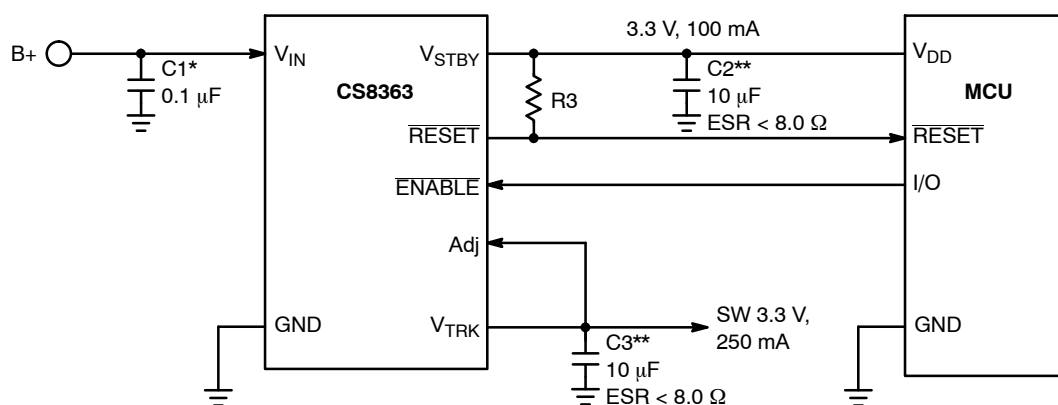

\*C1 is required if regulator is located far from power supply filter.

\*\*C2 and C3 are required for stability.

**Figure 3. Test and Application Circuit, Dual 3.3 V Regulator**

## APPLICATION NOTES

### External Capacitors

Output capacitors for the CS8363 are required for stability. Without them, the regulator outputs will oscillate. Actual size and type may vary depending upon the application load and temperature range. Capacitor effective series resistance (ESR) is also a factor in the IC stability. Worst-case is determined at the minimum ambient temperature and maximum load expected.

Output capacitors can be increased in size to any desired value above the minimum. One possible purpose of this would be to maintain the output voltages during brief conditions of negative input transients that might be characteristic of a particular system.

Capacitors must also be rated at all ambient temperatures expected in the system. To maintain regulator stability down to  $-40^{\circ}\text{C}$ , capacitors rated at that temperature must be used.

More information on capacitor selection for SMART REGULATOR®s is available in the SMART REGULATOR application note, "Compensation for Linear Regulators," document number SR003AN/D, available through the Literature Distribution Center or via our website at <http://www.onsemi.com>.

### Calculating Power Dissipation in a Dual Output Linear Regulator

The maximum power dissipation for a dual output regulator (Figure 4) is

$$PD(\text{max}) = [V_{IN(\text{max})} - V_{OUT1(\text{min})}]I_{OUT1(\text{max})} + [V_{IN(\text{max})} - V_{OUT2(\text{min})}]I_{OUT2(\text{max})} + V_{IN(\text{max})}I_Q \quad (1)$$

where:

$V_{IN(\text{max})}$  is the maximum input voltage,

$V_{OUT1(\text{min})}$  is the minimum output voltage from  $V_{OUT1}$ ,

$V_{OUT2(\text{min})}$  is the minimum output voltage from  $V_{OUT2}$ ,

$I_{OUT1(\text{max})}$  is the maximum output current, for the application,

$I_{OUT2(\text{max})}$  is the maximum output current, for the application, and


$I_Q$  is the quiescent current the regulator consumes at both  $I_{OUT1(\text{max})}$  and  $I_{OUT2(\text{max})}$ .

Once the value of  $P_{D(\text{max})}$  is known, the maximum permissible value of  $R_{\theta JA}$  can be calculated:

$$R_{\theta JA} = \frac{150^{\circ}\text{C} - T_A}{P_D} \quad (2)$$

The value of  $R_{\theta JA}$  can be compared with those in the package section of the data sheet. Those packages with  $R_{\theta JA}$ 's less than the calculated value in equation 2 will keep the die temperature below  $150^{\circ}\text{C}$ .

In some cases, none of the packages will be sufficient to dissipate the heat generated by the IC, and an external heatsink will be required.

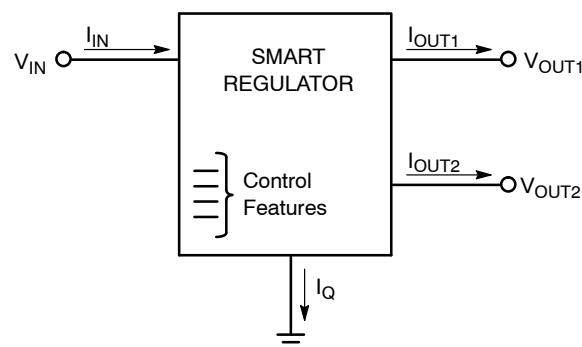

**Figure 4. Dual Output Regulator With Key Performance Parameters Labeled.**

**Heat Sinks**

A heat sink effectively increases the surface area of the package to improve the flow of heat away from the IC and into the surrounding air.

Each material in the heat flow path between the IC and the outside environment will have a thermal resistance. Like series electrical resistances, these resistances are summed to determine the value of  $R_{\theta JA}$ :

$$R_{\theta JA} = R_{\theta JC} + R_{\theta CS} + R_{\theta SA} \quad (3)$$

where:

$R_{\theta JC}$  = the junction-to-case thermal resistance,


$R_{\theta CS}$  = the case-to-heatsink thermal resistance, and

$R_{\theta SA}$  = the heatsink-to-ambient thermal resistance.

$R_{\theta JC}$  appears in the package section of the data sheet. Like  $R_{\theta JA}$ , it too is a function of package type.  $R_{\theta CS}$  and  $R_{\theta SA}$  are functions of the package type, heatsink and the interface between them. These values appear in heat sink data sheets of heat sink manufacturers.

## PACKAGE DIMENSIONS

**D<sup>2</sup>PAK-7 (SHORT LEAD)**  
**DPS SUFFIX**  
CASE 936AB-01  
ISSUE B

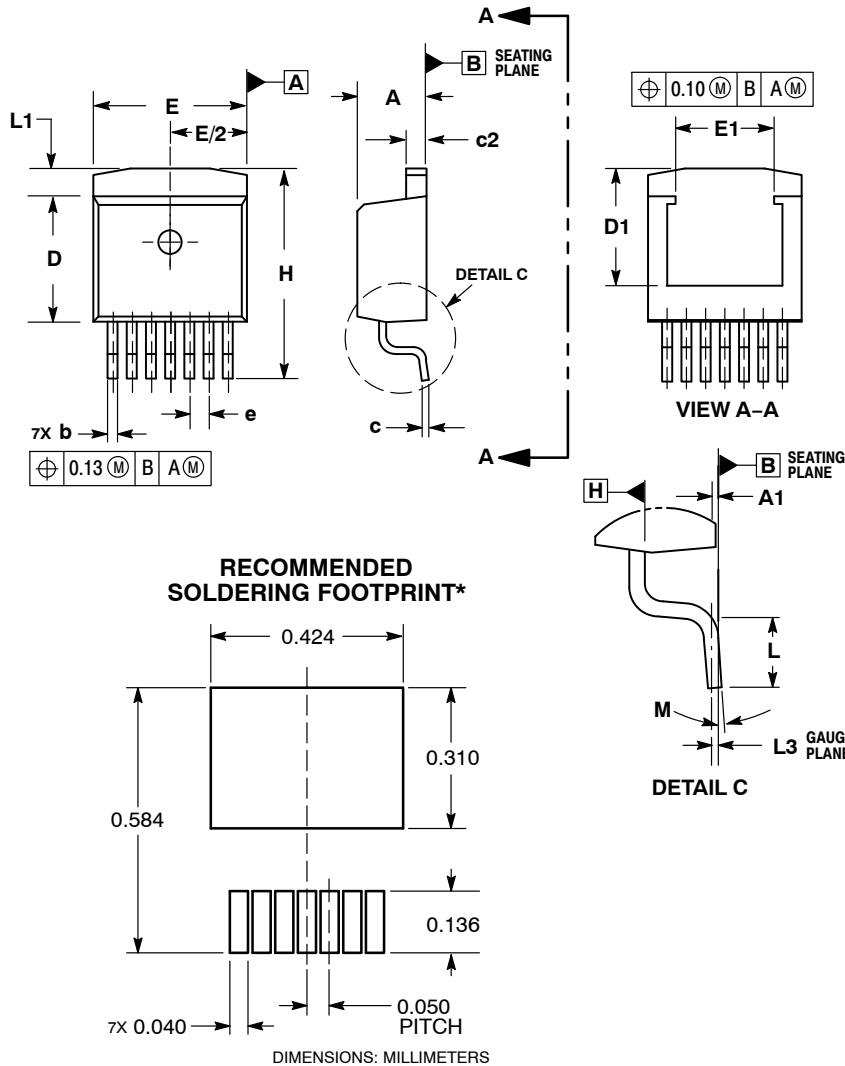

## NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: INCHES.
3. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH AND GATE PROTRUSIONS. MOLD FLASH AND GATE PROTRUSIONS NOT TO EXCEED 0.005 MAXIMUM PER SIDE. THESE DIMENSIONS TO BE MEASURED AT DATUM H.
4. THERMAL PAD CONTOUR OPTIONAL WITHIN DIMENSIONS E, L1, D1, AND E1. DIMENSIONS D1 AND E1 ESTABLISH A MINIMUM MOUNTING SURFACE FOR THE THERMAL PAD.

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 0.170     | 0.180 | 4.32        | 4.57  |
| A1  | 0.000     | 0.010 | 0.00        | 0.25  |
| b   | 0.026     | 0.036 | 0.66        | 0.91  |
| c   | 0.017     | 0.026 | 0.43        | 0.66  |
| c2  | 0.045     | 0.055 | 1.14        | 1.40  |
| D   | 0.325     | 0.368 | 8.25        | 9.53  |
| D1  | 0.270     | ---   | 6.86        | ---   |
| E   | 0.380     | 0.420 | 9.65        | 10.67 |
| E1  | 0.245     | ---   | 6.22        | ---   |
| e   | 0.050 BSC |       | 1.27 BSC    |       |
| H   | 0.539     | 0.579 | 13.69       | 14.71 |
| L   | 0.058     | 0.078 | 1.47        | 1.98  |
| L1  | ---       | 0.066 | ---         | 1.68  |
| L3  | 0.010 BSC |       | 0.25 BSC    |       |
| M   | 0 °       | 8 °   | 0 °         | 8 °   |

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

## PACKAGE THERMAL DATA

| Parameter        |         | D <sup>2</sup> PAK-7 | Unit |
|------------------|---------|----------------------|------|
| R <sub>θJC</sub> | Typical | 3.5                  | °C/W |
| R <sub>θJA</sub> | Typical | 10-50*               | °C/W |

\*Depending on thermal properties of substrate.  $R_{\theta JA} = R_{\theta JC} + R_{\theta CA}$ .

SMART REGULATOR is a registered trademark of Semiconductor Components Industries, LLC (SCILLC).

**ON Semiconductor** and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada

**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910

**Japan Customer Focus Center**  
Phone: 81-3-5773-3850

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)

**Order Literature:** <http://www.onsemi.com/orderlit>

For additional information, please contact your local  
Sales Representative



## О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

**Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.**


### **Наша компания это:**

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (XC), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

## Перечень производителей, продукцию которых мы поставляем на российский рынок





Trade Electronics.ru

гарантия бесперебойности производства и  
качества выпускаемой продукции

С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

<http://www.tradeelectronics.ru/>