

## Sensor/Actuator cable - SAC-3P-10,0-PUR/M12FR-2L B - 1681059

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Sensor/Actuator cable, 3-position, PUR halogen-free, Black-gray RAL 7021, Free cable end, on Socket angled M12, A-coded, with 2 LEDs, PIN 2+4 bridged, Cable length: 10 m

### Product Features

- ✓ Easy and safe: 100% electrically tested plug-in components
- ✓ Our standard: robust halogen-free PUR cable
- ✓ Convenient: increased machine availability thanks to quick and easy diagnostics



### Key commercial data

|                                      |           |
|--------------------------------------|-----------|
| Packing unit                         | 1 PCE     |
| Weight per Piece (excluding packing) | 267.7 GRM |
| Custom tariff number                 | 85444290  |
| Country of origin                    | Poland    |

### Technical data

#### Dimensions

|                                            |       |
|--------------------------------------------|-------|
| Length of cable                            | 10 m  |
| Stripping length of the free conductor end | 50 mm |

#### Ambient conditions

|                                 |                                  |
|---------------------------------|----------------------------------|
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket) |
| Degree of protection            | IP65                             |
|                                 | IP67                             |
|                                 | IP68                             |

#### General

|                       |      |
|-----------------------|------|
| Rated current at 40°C | 4 A  |
| Rated voltage         | 24 V |
| Number of positions   | 3    |

# Sensor/Actuator cable - SAC-3P-10,0-PUR/M12FR-2L B - 1681059

## Technical data

### General

|                              |                               |
|------------------------------|-------------------------------|
| Contact resistance           | $\leq 5 \text{ m}\Omega$      |
| Insulation resistance        | $\geq 100 \text{ M}\Omega$    |
| Coding                       | A - standard                  |
| Standards/regulations        | M12 connector IEC 61076-2-101 |
| Status display               | 2 LEDs                        |
| Protective circuit/component | Unwired                       |
| Surge voltage category       | II                            |
| Pollution degree             | 3                             |
| Insertion/withdrawal cycles  | $\geq 100$                    |
| Torque                       | 0.4 Nm (M12 connector)        |

### Material

|                                         |                                             |
|-----------------------------------------|---------------------------------------------|
| Inflammability class according to UL 94 | HB                                          |
| Contact material                        | CuSn                                        |
| Contact surface material                | Ni/Au                                       |
| Contact carrier material                | TPU GF                                      |
| Material of grip body                   | TPU, hardly inflammable, self-extinguishing |
| Material, knurls                        | Zinc die-cast, nickel-plated                |
| Sealing material                        | NBR                                         |

### Cable

|                                               |                                          |
|-----------------------------------------------|------------------------------------------|
| Cable type                                    | PUR halogen-free black                   |
| Cable type (abbreviation)                     | PUR                                      |
| Cable abbreviation                            | Li9Y11Y                                  |
| UL AWM style                                  | 20549                                    |
| Conductor cross section                       | 3x 0.34 mm <sup>2</sup> (signal line)    |
| AWG signal line                               | 22                                       |
| Conductor structure signal line               | 42x 0.10 mm                              |
| Core diameter including insulation            | 1.27 mm $\pm$ 0.02 mm (signal line)      |
| Thickness, insulation                         | $\geq 0.21 \text{ mm}$ (Core insulation) |
|                                               | approx. 0.8 mm (Outer cable sheath)      |
| Wire colors                                   | brown, blue, black                       |
| Overall twist                                 | 3 wires, twisted                         |
| External sheath, color                        | Black-gray RAL 7021                      |
| External cable diameter D                     | 4.4 mm $\pm$ 0.15 mm                     |
| Smallest bending radius, fixed installation   | 22 mm                                    |
| Smallest bending radius, movable installation | 44 mm                                    |
| Number of bending cycles                      | 4000000                                  |

## Sensor/Actuator cable - SAC-3P-10,0-PUR/M12FR-2L B - 1681059

### Technical data

#### Cable

|                                 |                                                                     |
|---------------------------------|---------------------------------------------------------------------|
| Bending radius                  | 44 mm                                                               |
| Traversing path                 | 10 m                                                                |
| Traversing rate                 | 3 m/s                                                               |
| Acceleration                    | 10 m/s <sup>2</sup>                                                 |
| Cable weight                    | 26 kg/km                                                            |
| Outer sheath, material          | PUR                                                                 |
| Material conductor insulation   | PP                                                                  |
| Conductor material              | Bare Cu litz wires                                                  |
| Insulation resistance           | ≥ 100 GΩ*km (at 20 °C)                                              |
| Conductor resistance            | max. 58 Ω/km (at 20 °C)                                             |
| Nominal voltage, cable          | ≤ 300 V                                                             |
| Test voltage, cable             | ≥ 3000 V                                                            |
| Special properties              | Flexible cable conduit capable                                      |
|                                 | Silicone-free                                                       |
|                                 | Free of substances which would hinder coating with paint or varnish |
| Flame resistance                | in accordance with DIN UL-Style 20549                               |
| Halogen-free                    | in accordance with DIN VDE 0472 part 815                            |
| Resistance to oil               | in accordance with DIN EN 60811-2-1                                 |
| Other resistance                | Highly resistant to acids, alkaline solutions and solvents          |
|                                 | hydrolysis and microbe resistant                                    |
|                                 | partly UV-resistant in accordance with DIN EN ISO 4892-2-A          |
| Ambient temperature (operation) | -40 °C ... 80 °C (cable, fixed installation)                        |
|                                 | -25 °C ... 80 °C (cable, flexible installation)                     |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27060306 |
| eCl@ss 4.1 | 27060306 |
| eCl@ss 5.0 | 27061801 |
| eCl@ss 5.1 | 27061801 |
| eCl@ss 6.0 | 27061801 |
| eCl@ss 7.0 | 27061801 |
| eCl@ss 8.0 | 27061801 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 2.0 | EC000830 |
|----------|----------|

## Sensor/Actuator cable - SAC-3P-10,0-PUR/M12FR-2L B - 1681059

### Classifications

#### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001855 |
| ETIM 4.0 | EC001855 |
| ETIM 5.0 | EC001855 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 31251501 |
| UNSPSC 7.0901 | 31251501 |
| UNSPSC 11     | 31251501 |
| UNSPSC 12.01  | 31251501 |
| UNSPSC 13.2   | 31251501 |

### Approvals

#### Approvals

#### Approvals

UL Listed / cUL Listed / GOST / cULus Listed

#### Ex Approvals

#### Approvals submitted

#### Approval details

|                                                                                               |      |
|-----------------------------------------------------------------------------------------------|------|
| UL Listed  |      |
| Nominal current I <sub>N</sub>                                                                | 4 A  |
| Nominal voltage U <sub>N</sub>                                                                | 24 V |

|                                                                                                |     |
|------------------------------------------------------------------------------------------------|-----|
| cUL Listed  |     |
| Nominal current I <sub>N</sub>                                                                 | 4 A |

## Sensor/Actuator cable - SAC-3P-10,0-PUR/M12FR-2L B - 1681059

### Approvals

|                    |      |
|--------------------|------|
| Nominal voltage UN | 24 V |
|--------------------|------|

GOST 

cULus Listed 

### Accessories

#### Accessories

#### Conductor marking

Insert label - PABA WH/15 - 1013151



Insert label, Strip, white, Unlabeled, Can be labeled with: Plotter, Mounting type: Thread on, Cable diameter: 0.6-50 mm, Lettering field: 15 x 4 mm

Insert label - PABA YE/15 - 1013698



Insert label, Strip, yellow, Unlabeled, Can be labeled with: Plotter, Mounting type: Thread on, Cable diameter: 0.6-50 mm, Lettering field: 15 x 4 mm

Insert label - PABA RD/15 - 1013944



Insert label, Strip, red, Unlabeled, Can be labeled with: Plotter, Mounting type: Thread on, Cable diameter: 0.6-50 mm, Lettering field: 15 x 4 mm

### Cutting tools

## Sensor/Actuator cable - SAC-3P-10,0-PUR/M12FR-2L B - 1681059

### Accessories

Cable-cutting tool - CUTFOX-S VDE - 1212207



Diagonal cutter for copper and aluminum conductors, VDE-tested

---

### Marker carrier cable

Conductor marker carrier - PATG 2/15 - 1013038



Conductor marker carrier, transparent, Unlabeled, Mounting type: Slide on, Cable diameter: 2-4 mm, Lettering field: 4 x 15 mm

---

Conductor marker carrier - PATG 3/15 - 1013041



Conductor marker carrier, transparent, Unlabeled, Mounting type: Slide on, Cable diameter: 4-7 mm, Lettering field: 4 x 15 mm

---

Conductor marker carrier - PATG 4/15 - 1013054



Conductor marker carrier, transparent, Unlabeled, Mounting type: Slide on, Cable diameter: 6-10 mm, Lettering field: 4 x 15 mm

---

### Marker pen

Marker pen - B-STIFT - 1051993



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

## Sensor/Actuator cable - SAC-3P-10,0-PUR/M12FR-2L B - 1681059

### Accessories

---

#### Protective cap

Screw plug - PROT-M12 MS-PA-CHAIN - 1430899

M12 sealing cap with fixing band, for sensor cables, for free M12 sockets



#### Safety locking

Fuse clip - SAC-M12-EXCLIP-F - 1558991



Fuse clip for the socket side of various M12 sensor/actuator connectors prevents plug-in connections being interrupted without using a tool

#### Screwdriver tools

Adapter insert - TSD-M SAC-BIT ADAPTER - 1212600



Adapter bit for TSD-M...torque tools, E6.3-1/4" drive with 4 mm hexagon to accommodate SAC bits

Tool - SAC BIT M12-D15 - 1208432



Nut for assembling sensor/actuator cables with M12 connector and for M12 connectors with QUICKON fast connection technology, for 4 mm hexagonal drive

#### Stripping tool

## Sensor/Actuator cable - SAC-3P-10,0-PUR/M12FR-2L B - 1681059

### Accessories

Stripping tool - WIREFOX SAC - 1212623



Stripping pliers, for halogen-free sensor/actuator cables (SAC cables), with PUR and PVC insulation, from Ø of 4.4 to 7 mm, any stripping length

---

Stripping tool - WIREFOX 10 - 1212150



Stripping tool, for cables and conductors from 0.02 - 10 mm<sup>2</sup>, self-adjusting, stripping length of up to 18 mm, cutting capacity of up to 10 mm<sup>2</sup> stranded/1.5 mm<sup>2</sup> solid, replaceable stripping blade

---

### Torque tool

Torque screwdriver - TSD 04 SAC - 1208429



Torque screwdriver, with preset torque of 0.4 Nm and 4 mm hexagonal drive for M12 connectors

---

Torque screwdriver - TSD-M 1,2NM - 1212224




Torque screw driver, accuracy as per EN ISO 6789 standard, adjustable from 0.3 - 1.2 Nm

---

### Drawings


## Sensor/Actuator cable - SAC-3P-10,0-PUR/M12FR-2L B - 1681059

Schematic diagram




Pin assignment M12 socket, 3-pos., PIN  
2+4 bridged, A-coded, view female side

Cable cross section




PUR halogen-free black [PUR]

Dimensioned drawing



Socket M12 x 1, angled, with LED

Circuit diagram

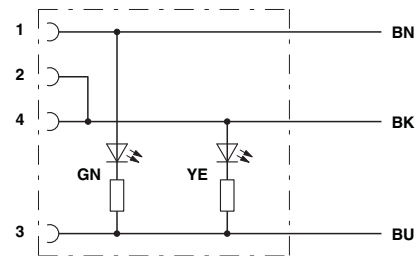

Contact assignment of M12 sockets with 2 LEDs, bridged



## О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

**Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.**

### Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (XC), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

## Перечень производителей, продукцию которых мы поставляем на российский рынок





Trade Electronics.ru

гарантия бесперебойности производства и  
качества выпускаемой продукции

С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

<http://www.tradeelectronics.ru/>