
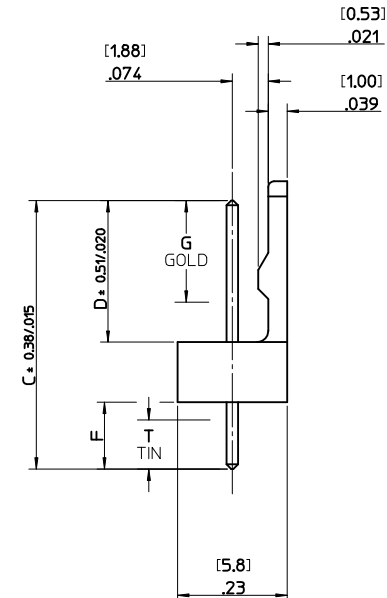
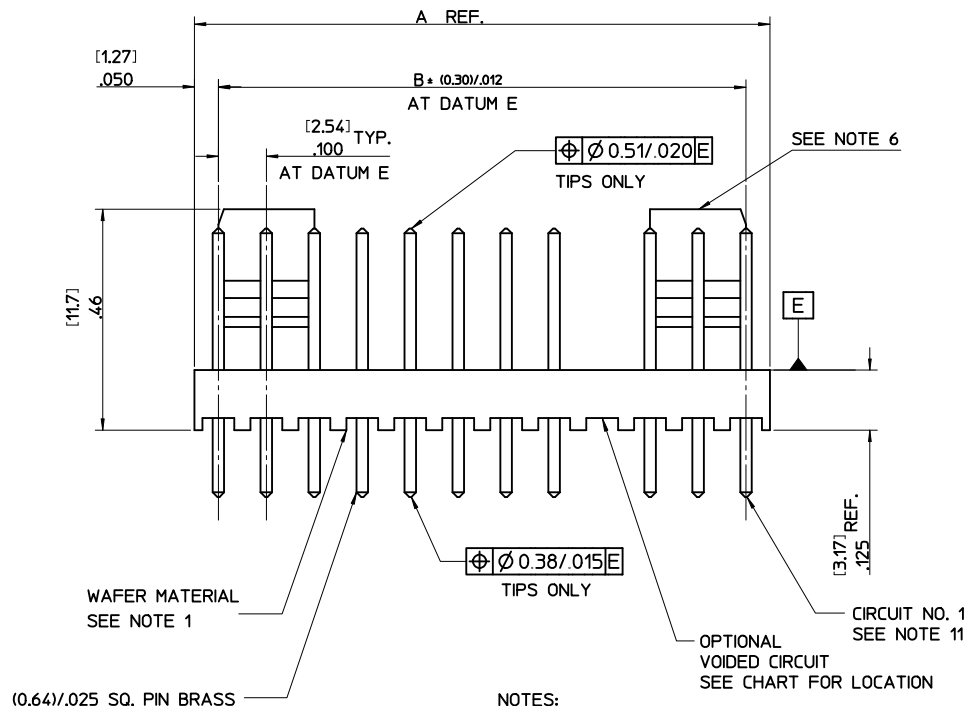


NO. OF CCTS	DIMN. "A"	DIMN. "B"
2	(5.08) .200	(2.54) .100
3	(7.62) .300	(5.08) .200
4	(10.16) .400	(7.62) .300
5	(12.70) .500	(10.16) .400
6	(15.24) .600	(12.70) .500
7	(17.78) .700	(15.24) .600
8	(20.32) .800	(17.78) .700
9	(22.86) .900	(20.32) .800
10	(25.40) 1.000	(22.86) .900
11	(27.94) 1.100	(25.40) 1.000
12	(30.48) 1.200	(27.94) 1.100
13	(33.02) 1.300	(30.48) 1.200
14	(35.56) 1.400	(33.02) 1.300
15	(38.10) 1.500	(35.56) 1.400
16	(40.64) 1.600	(38.10) 1.500



AE-6410- N * (*) - *


NO. OF CCTS

WAFER ASSY.
OPTION

VOIDED CIRCUIT CODE
NO. CORRESPONDS TO
CIRCUIT NO. VOIDED.
MULTIPLE VOIDS START
WITH 51
BLANK = NONE


PLATING TYPE

[2.54 ± 0.05]
.100 ± .002
NON-ACCUM.



RECOMMENDED P.C.B. HOLE DIMENSIONS
(STANDARD SERIES)

SEE NOTE 6




NOTES:

1. WAFER MATERIAL: NYLON, UL94V-0, PIN MATERIAL: BRASS
2. FINISH:
154 = OVERALL TIN: 0.00254/.00100 MIN. OVER 0.00127/.000050 MIN. NICKEL
197 = OVERALL REFLOWED MATTE TIN: 0.00152/.00060 MIN. OVER 0.00127/.000050 MIN. NICKEL
222 = OVERALL MATTE TIN: 0.00254/.00100 MIN. OVER 0.00127/.000050 MIN. NICKEL
228 = SELECT GOLD 0.00076/.000030 MIN., SELECT MATTE TIN: 0.00254/.00100
OVER 0.00127/.000050 MIN. NICKEL
231 = SELECT GOLD 0.00127/.000050 MIN., SELECT MATTE TIN: 0.00254/.00100
OVER 0.00076/.000030 MIN. NICKEL
241 = SELECT GOLD 0.00051/.000020 MIN., SELECT MATTE TIN: 0.00254/.00100
OVER 0.00076/.000030 MIN. NICKEL
3. THIS PART CONFORMS TO MOLEX PROD. SPEC. PS-99020-0088.
4. PACKAGING: PER PK-6410-002
5. PIN SOLDERABILITY PER MOLEX SPEC. SMES-152.
6. SINGLE RAMP ON 2-6 CCTS TWO RAMP ON 7-16 CCTS, AS SHOWN.
7. PIN PUSH OUT FORCE: (0.907 Kg)/2lbs MIN.
8. PCB THICKNESS 1.6MM
9. WAFERS STACKABLE END TO END WITH (2.54)/.100
BETWEEN END PINS
10. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC
SPECIFICATION PS-45499-002.
11. CIRCUIT 1 DESIGNATION IS USED TO DEFINE VOID LOCATION. CIRCUIT 1
MAY OR MAY NOT LINE UP WITH CIRCUIT 1 ON THE MATING HOUSING.

CHANGE PLATING EC NO: UCP2012-1821 DRWN:WSTROH CHKD:MKIPPER APPR:FSMITH	REV	DESCRIPTION 2011/12/22 2012/01/03 2012/02/02	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 5:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
					mm	INCH	DRAWN BY T. MAHON	DATE 28/01/03	TITLE WAFER, FRICTION LOCK KK (2.54)/.100 FOR (0.64)/.025 SQ. PINS		
				4 PLACES	± ---	± ---	CHECKED BY BMAGUIRE	DATE 28/01/03	MOLEX MOLEX INCORPORATED		
				3 PLACES	± ---	± .010	APPROVED BY JDENNEHY	DATE 2005/03/11			
				2 PLACES	± 0.25	± .014	MATERIAL NO.		DOCUMENT NO.	SHEET NO.	
				1 PLACE	± 0.35	± ---	SEE CHART		SDAE-6410-N	1 OF 4	
BC				ANGULAR ± .5 °							
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

ENG. NO.		AE-6410-NA (222)		AE-6410-NC (197)		AE-6410-NH (197)		AE-6410-NJ (197)		AE-6410-NL (154)		AE-6410-NM (154)	
DIMN. "D"		(7.50) .295		(7.14) .281		(7.49) .295		(18.80) .740		(8.58) .338		(7.62) .300	
DIMN. "C"		(14.22) / .560		(20.32) / .800		(14.98) / .590		(25.40) / 1.000		(23.88) / .940		(20.32) / .800	
DIMN. "F"		(3.56) / .140 REF		(10.00) / .394 REF		(4.32) / .170 REF		(3.43) / .135 REF		(12.13) / .477 REF		(9.53) / .375 REF	
DIMN. "G"		N/A		N/A		N/A		N/A		N/A		N/A	
DIMN. "T"		OVERALL		OVERALL		OVERALL		OVERALL		OVERALL		OVERALL	
PLATING		222		197		197		197		154		154	
NO. OF CIRCUITS	2	AE-6410-2A(222)	22-27-2021	AE-6410-2C(197)	38-00-6292	AE-6410-2H(197)	38-00-6754	AE-6410-2J(197)	NOT TOOLED	AE-6410-2L(154)	NOT TOOLED	AE-6410-2M(154)	NOT TOOLED
	3	3 A(222)	▲ 2031	3 C(197)	▲ 6293	3 H(197)	NOT TOOLED	3 J(102)	NOT TOOLED	3 L(154)	26-01-3195	3 M(154)	26-01-3179
	4	4 A(222)	2041	4 C(197)	6294	4 H(197)	22-27-2046	4 J(102)	NOT TOOLED	4 L(154)	NOT TOOLED	4 M(154)	NOT TOOLED
	5	5 A(222)	2051	5 C(197)	6295	5 H(197)	NOT TOOLED	5 J(102)	22-27-2057	5 L(154)	▲	5 M(154)	▲
	6	6 A(222)	2061	6 C(197)	6296	6 H(197)	▲	6 J(102)	NOT TOOLED	6 L(154)		6 M(154)	▲
	7	7 A(222)	2071	7 C(197)	6297	7 H(197)	▲	7 J(102)	NOT TOOLED	7 L(154)		7 M(154)	
	8	8 A(222)	2081	8 C(197)	6298	8 H(197)		8 J(102)	22-27-2087	8 L(154)		8 M(154)	
	9	9 A(222)	2091	9 C(197)	6299	9 H(197)		9 J(102)	NOT TOOLED	9 L(154)		9 M(154)	
	10	10 A(222)	2101	10 C(197)	6300	10 H(197)	▼	10 J(102)	▲	10 L(154)		10 M(154)	
	11	11 A(222)	2111	11 C(197)	6301	11 H(197)	NOT TOOLED	11 J(102)		11 L(154)		11 M(154)	
	12	12 A(222)	2121	12 C(197)	6302	12 H(197)	22-27-2126	12 J(102)		12 L(154)		12 M(154)	
	13	13 A(222)	2131	13 C(197)	6303	13 H(197)	NOT TOOLED	13 J(102)		13 L(154)	▼	13 M(154)	
	14	14 A(222)	2141	14 C(197)	6304	14 H(197)	▲	14 J(102)		14 L(154)		14 M(154)	
	15	15 A(222)	▼ 2151	15 C(197)	▼ 6305	15 H(197)	▲	15 J(102)	▼	15 L(154)	38-00-1736	15 M(154)	▼
	16	AE-6410-16A(222)	22-27-2161	AE-6410-16C(197)	38-00-6306	AE-6410-16H(197)	NOT TOOLED	AE-6410-16J(197)	NOT TOOLED	AE-6410-16L(154)	NOT TOOLED	AE-6410-16M(154)	NOT TOOLED

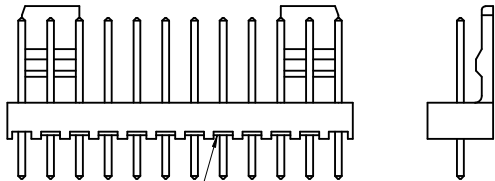

RIBS ADDED
(4-16 CCTS. ONLY)

ALTERNATIVE WAFER CONFIGURATION

SEE SHEET 1 EC NO: UCP2012-1821 DRWN:MMSTROH 2011/12/22 CHKD:MKIPPER 2012/01/03 APPR:FSMITH 2012/02/02	REV	BC	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
				▽=0	mm INCH	MM/IN	4:1	METRIC	
				▽=0	4 PLACES ± --- ± ---	DRAWN BY DATE	T. MAHON 28/01/03	WAIVER, FRICTION LOCK	
				▽=0	3 PLACES ± --- ± .010	CHECKED BY DATE	BMAGUIRE 28/01/03	KK (2.54)/.100 FOR	
					2 PLACES ± 0.25 ± .014	APPROVED BY DATE	JDENNEHY 2005/03/11	(0.64)/.025 SQ. PINS	
					1 PLACE ± 0.35 ± ---			MOLEX MOLEX INCORPORATED	
					ANGULAR ± .5 °			SDAE-6410-N	
					DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE CHART	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
							SHEET NO. 2 OF 4		

J

I

H

G

F

E

D

C

B

A

ENG. NO.		AE-6410-NA (241)		AE-6410-NC (241)		AE-6410-NA (231)		AE-6410-NS (241)		AE-6410-NA (228)	
DIMN. "D"		(7.50) .295		(7.14) .281		(7.50) .295		(7.50) .295		(7.50) .295	
DIMN. "C"		(14.22) / .560		(20.32) / .800		(14.22) / .560		(16.51) / .650		(14.22) / .560	
DIMN. "F"		(3.56) / .140 REF		(10.00) / .394 REF		(3.56) / .140 REF		(5.84) / .230 REF		(3.56) / .140 REF	
DIMN. "G"		(3.56) / .140		(5.08) / .200		(3.56) / .140		(5.08) / .200		(3.56) / .140	
DIMN. "T"		(3.43) / .135		(5.08) / .200		(3.43) / .135		(5.08) / .200		(3.43) / .135	
PLATING		241		241		231		241		228	
NO. OF CIRCUITS	2	AE-6410-2A(241)	22-29-2021	AE-6410-2C(241)	NOT TOOLED	AE-6410-2A(231)	38-00-7250		NOT TOOLED	AE-6410-2A(228)	38-00-7062
	3	3 A(241)	↑ 2031	3 C(241)	38-00-5909	3 A(231)	NOT TOOLED		NOT TOOLED	3 A(228)	↑ 7063
	4	4 A(241)	2041	4 C(241)	NOT TOOLED	4 A(231)	38-00-7251	AE-6410-4S(241)	38-00-7666	4 A	↑ 7064
	5	5 A(241)	2051	5 C(241)	↑	5 A(231)	NOT TOOLED		NOT TOOLED	5 A	↑ 7065
	6	6 A(241)	2061	6 C(241)		6 A(231)	↑	6 S(241)	38-00-7667	6 A	↑ 7066
	7	7 A(241)	2071	7 C(241)		7 A(231)			NOT TOOLED	7 A	↓ 7067
	8	8 A(241)	2081	8 C(241)		8 A(231)			↑	8 A	38-00-7068
	9	9 A(241)	2091	9 C(241)		9 A(231)				9 A	NOT TOOLED
	10	10 A(241)	2101	10 C(241)		10 A(231)				10 A	NOT TOOLED
	11	11 A(241)	2111	11 C(241)		11 A(231)				11 A	NOT TOOLED
	12	12 A(241)	2121	12 C(241)		12 A(231)				12 A	38-00-7072
	13	13 A(241)	2131	13 C(241)		13 A(231)				13 A	NOT TOOLED
	14	14 A(241)	2141	14 C(241)		14 A(231)				14 A	38-00-7074
	15	15 A(241)	2151	15 C(241)		15 A(231)			↓	15 A	NOT TOOLED
	16	AE-6410-16A(241)	22-29-2161	AE-6410-16C(241)	NOT TOOLED	AE-6410-16A(231)	NOT TOOLED		NOT TOOLED	AE-6410-16A(228)	NOT TOOLED

SEE SHEET 1

EC NO: UCP2012-1821

DRWN:MMSTROH 2011/12/22

CHKD:MKLIPPER 2012/01/03

APPR:FSMITH 2012/02/02

REV

BC

QUALITY SYMBOLS

▽=0

▽=0

▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .010
2 PLACES	± 0.25	± .014
1 PLACE	± 0.35	± ---

ANGULAR ± .5 °

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE

MM/IN

DRAWN BY	DATE
T. MAHON	28/01/03
CHECKED BY	DATE
BMAGUIRE	28/01/03
APPROVED BY	DATE
JDENNEHY	2005/03/11

MATERIAL NO.

SEE CHART

SIZE

C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

SCALE

4:1

DESIGN UNITS

METRIC

 THIRD ANGLE PROJECTION

TITLE

WAFER, FRICTION LOCK
KK (2.54) / .100 FOR
(0.64) / .025 SQ. PINS

 MOLEX INCORPORATED

DOCUMENT NO.

SDAE-6410-N

SHEET NO.

3 OF 4

VOIDED CIRCUIT OPTION

ENG. NO.	AE-6410-NA(197)-*		
DIM. D	7.50/.295		
DIM. C	14.22 /.560		
DIM. F (REF)	3.56 /.140		
DIM. G	N/A		
DIM. T	OVERALL		
PLATING	197		
PART No.	ENG No.	CKT SIZE	VOID LOCATION
38-00-7222	AE-6410-3A(197)-2	3	2
↑ 4749	↑ -4A(197)-3	4	3
0611	-5A(197)-3	5	3
0089	-6A(197)-3	6	3
0090	-6A(197)-51	6	3,4,5
5370	-15A(197)-02	15	2
↓ 7688	↓ -12A(197)-09	12	9

SEE SHEET 1 EC NO: UCP2012-1821 DRAWN:MMSTROH 2011/12/22 CHKD:MKIPPER 2012/01/03 APPR:FSMITH 2012/02/02	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
			mm	INCH	DRAWN BY T. MAHON	DATE 28/01/03	TITLE WAFER, FRICTION LOCK KK (2.54)/.100 FOR (0.64)/.025 SQ. PINS			
		4 PLACES ± --- ± ---	3 PLACES ± --- ± .010	CHECKED BY BMAGUIRE	DATE 28/01/03					
		2 PLACES ± 0.25 ± .014	1 PLACE ± 0.35 ± ---	APPROVED BY JDENNEHY	DATE 2005/03/11	MOLEX INCORPORATED				
ANGULAR ± .5 °		MATERIAL NO.		DOCUMENT NO.						SHEET NO.
BC	REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SDAE-6410-N		4 OF 4		
		SIZE B		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						



О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.



Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (XC), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

Перечень производителей, продукцию которых мы поставляем на российский рынок





Trade Electronics.ru

гарантия бесперебойности производства и
качества выпускаемой продукции

С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

<http://www.tradeelectronics.ru/>