

FAN4040

Precision Micropower Shunt Voltage Reference

Features

- Fixed 2.500V, 3.300V and 5.00V
- Tolerances to $\pm 0.1\%$ (25°C)
- Low output noise
- Low temperature coefficient to 100ppm/°C
- Small package
- Extended operating current range
- Extended temperature range

Applications


- Portable equipment
- Disk drives
- Instrumentation
- Audio equipment
- Data acquisition systems

Description

The FAN4040 series of precision shunt references are ideal for space- and cost-sensitive applications. They are available in three output voltages (2.500V, 3.300V and 5.00V) and with four output voltage tolerances (0.1%, 0.2%, 0.5% and 1%). They also have excellent temperature coefficients, to 100ppm/°C for the tighter tolerance grades. The FAN4040 series has an extended operating current range, sinking as much as 25mA.

The FAN4040 series is available in SOT-23 package.

Connection Diagrams

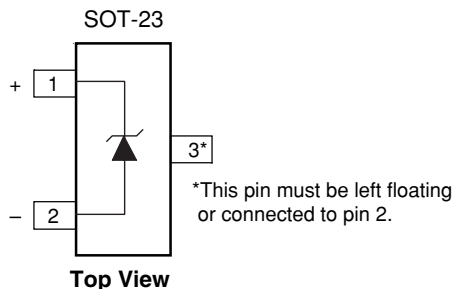

Absolute Maximum Ratings¹

Ratings are over full operating free-air temperature range unless otherwise noted.

Parameter	Min.	Max.	Unit
Continuous cathode current, I _K	-30	30	mA
Power dissipation	See Dissipation Rating Table		
Storage Temperature Range	-65	150	°C
Lead Temperature (Soldering, 10 sec.)		300	°C

Notes:

- 1. Functional operation under these conditions is not implied. Permanent damage may occur if the device is subjected to conditions outside these ratings.

Recommended Operating Conditions

Parameter		Min.	Max.	Unit
Continuous cathode current, I _K		0.025	25	mA
Operating temperature range in free air, T _A	I Grade	-40	85	°C
	E Grade	-40	125	°C


Dissipation Rating Table

Package	Power Rating T _A ≤ 25°C	Derating Factor T _A ≥ 25°C	Power Rating T _A = 70°C
SOT23 ¹	306mW	3.0mW/°C	168mW

Note:

- 1. It is recommended to connect pin 3 to pin 2 to ensure optimal thermal performance.

Equivalent Schematic

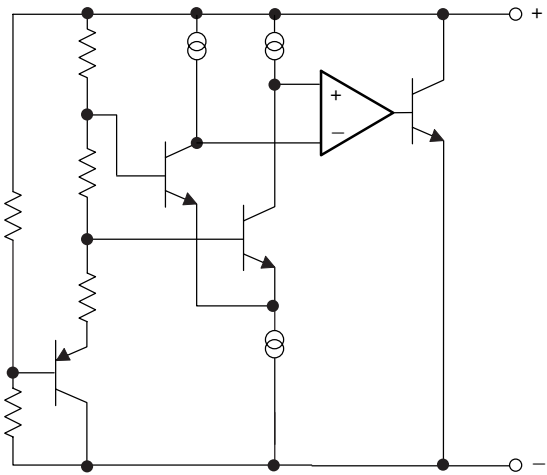

Guaranteed Electrical Characteristics, FAN4040-2.5, Industrial Temperature Range

($T_A = 25^\circ\text{C}$ unless otherwise specified, in free air)

The • denotes specifications which apply over the full operating temperature range.

Symbol	Parameter	Conditions	Limits				Units
			A	B	C	D	
V_R	Reverse Breakdown Voltage	$I_K = 100\mu\text{A}$	2.500	2.500	2.500	2.500	V*
TCV_R	Reverse Breakdown Voltage Tolerance	$I_K = 100\mu\text{A}$	± 2.5 • ± 19	± 5.0 • ± 21	± 12 • ± 29	± 25 • ± 49	mV mV
I_{RMIN}	Minimum Operating Current		• 65	• 65	• 65	• 70	μA
$\Delta V_R / \Delta T$	Reverse Breakdown Voltage Temperature Coefficient	$I_K = 1\text{mA}$	• ± 100	• ± 100	• ± 100	• ± 150	ppm/ $^\circ\text{C}$
$\Delta V_R (\Delta I_K)$	Reverse Breakdown Voltage Change with Operating Current	$I_{RMIN} \leq I_K \leq 1\text{mA}$ $1\text{mA} \leq I_K \leq 15\text{mA}$ $1\text{mA} \leq I_K \leq 25\text{mA}$	• 1.2 • 8.0 10	1.2 8.0 10	1.2 8.0 10	1.5 10.0 12	mV mV mV*
Z_{KA}	Reverse Dynamic Impedance	$I_K = 1\text{mA}$, $f = 120\text{Hz}$, $I_{AC} = 0.1I_K$	1.0	1.0	1.0	1.3	Ω^*
e_N	Wideband Noise	$I_K = 100\mu\text{A}$, $10\text{Hz} \leq f \leq 10\text{kHz}$	35	35	35	35	μV_{RMS}^*
ΔV_R	Reverse Breakdown Voltage Long-term Stability	$t = 1000\text{hrs}$, $T = 25^\circ\text{C}$, $I_K = 100\mu\text{A}$	120	120	120	120	ppm*

*Typical.

Guaranteed Electrical Characteristics, FAN4040-3.3, Industrial Temperature Range

($T_A = 25^\circ\text{C}$ unless otherwise specified, in free air)

The • denotes specifications which apply over the full operating temperature range.

Symbol	Parameter	Conditions	Limits				Units
			A	B	C	D	
V_R	Reverse Breakdown Voltage	$I_K = 100\mu\text{A}$	3.300	3.300	3.300	3.300	V*
TCV_R	Reverse Breakdown Voltage Tolerance	$I_K = 100\mu\text{A}$	± 3.3 • ± 25	± 6.6 • ± 28	± 17 • ± 38	± 33 • ± 65	mV mV
I_{RMIN}	Minimum Operating Current		• 70	• 70	• 70	• 75	μA
$\Delta V_R / \Delta T$	Reverse Breakdown Voltage Temperature Coefficient	$I_K = 1\text{mA}$	• ± 100	• ± 100	• ± 100	• ± 150	ppm/ $^\circ\text{C}$
$\Delta V_R (\Delta I_K)$	Reverse Breakdown Voltage Change with Operating Current	$I_{RMIN} \leq I_K \leq 1\text{mA}$ $1\text{mA} \leq I_K \leq 15\text{mA}$ $1\text{mA} \leq I_K \leq 25\text{mA}$	• 1.2 • 10 12	1.2 10 12	1.2 10 12	1.5 13 15	mV mV mV*
Z_{KA}	Reverse Dynamic Impedance	$I_K = 1\text{mA}$, $f = 120\text{Hz}$, $I_{AC} = 0.1I_K$	1.0	1.0	1.0	1.3	Ω^*
e_N	Wideband Noise	$I_K = 100\mu\text{A}$, $10\text{Hz} \leq f \leq 10\text{kHz}$	70	70	70	70	μV_{RMS}^*
ΔV_R	Reverse Breakdown Voltage Long-term Stability	$t = 1000\text{hrs}$, $T = 25^\circ\text{C}$, $I_K = 100\mu\text{A}$	120	120	120	120	ppm*

*Typical.

Guaranteed Electrical Characteristics, FAN4040-5.0, Industrial Temperature Range

($T_A = 25^\circ\text{C}$ unless otherwise specified, in free air)

The • denotes specifications which apply over the full operating temperature range.

Symbol	Parameter	Conditions	Limits				Units
			A	B	C	D	
V_R	Reverse Breakdown Voltage	$I_K = 100\mu\text{A}$	5.00	5.00	5.00	5.00	V*
TCV_R	Reverse Breakdown Voltage Tolerance	$I_K = 100\mu\text{A}$	± 5 • ± 40	± 10 • ± 45	± 24 • ± 60	± 50 • ± 100	mV mV
I_{RMIN}	Minimum Operating Current		• 65	• 65	• 65	• 70	μA
$\Delta V_R / \Delta T$	Reverse Breakdown Voltage Temperature Coefficient	$I_K = 1\text{mA}$	• ± 100	• ± 100	• ± 100	• ± 150	ppm/ $^\circ\text{C}$
$\Delta V_R (\Delta I_K)$	Reverse Breakdown Voltage Change with Operating Current	$I_{RMIN} \leq I_K \leq 1\text{mA}$ $1\text{mA} \leq I_K \leq 15\text{mA}$ $1\text{mA} \leq I_K \leq 25\text{mA}$	• 1.2 • 8.0 10	1.2 8.0 10	1.2 8.0 10	1.5 10.0 12	mV mV mV*
Z_{KA}	Reverse Dynamic Impedance	$I_K = 1\text{mA}$, $f = 120\text{Hz}$, $I_{AC} = 0.1I_K$	1.0	1.0	1.0	1.3	Ω^*
e_N	Wideband Noise	$I_K = 100\mu\text{A}$, $10\text{Hz} \leq f \leq 10\text{kHz}$	70	70	70	70	μV_{RMS}^*
ΔV_R	Reverse Breakdown Voltage Long-term Stability	$t = 1000\text{hrs}$, $T = 25^\circ\text{C}$, $I_K = 100\mu\text{A}$	120	120	120	120	ppm*

*Typical.

Guaranteed Electrical Characteristics, FAN4040-2.5, Extended Temperature Range

($T_A = 25^\circ\text{C}$ unless otherwise specified, in free air)

The • denotes specifications which apply over the full operating temperature range.

Symbol	Parameter	Conditions	Limits				Units
			A	B	C	D	
V_R	Reverse Breakdown Voltage	$I_K = 100\mu\text{A}$	2.500	2.500	2.500	2.500	V*
TCV_R	Reverse Breakdown Voltage Tolerance	$I_K = 100\mu\text{A}$	± 2.5 • ± 25	± 5.0 • ± 30	± 12 • ± 35	± 25 • ± 49	mV mV
I_{RMIN}	Minimum Operating Current		• 65	• 65	• 65	• 70	μA
$\Delta V_R / \Delta T$	Reverse Breakdown Voltage Temperature Coefficient	$I_K = 1\text{mA}$	• ± 100	• ± 100	• ± 100	• ± 150	ppm/ $^\circ\text{C}$
$\Delta V_R (\Delta I_K)$	Reverse Breakdown Voltage Change with Operating Current	$I_{RMIN} \leq I_K \leq 1\text{mA}$ $1\text{mA} \leq I_K \leq 15\text{mA}$ $1\text{mA} \leq I_K \leq 25\text{mA}$	• 1.5 • 10.0 10	1.5 10.0 10	1.5 10.0 10	1.5 10.0 12	mV mV mV*
Z_{KA}	Reverse Dynamic Impedance	$I_K = 1\text{mA}$, $f = 120\text{Hz}$, $I_{AC} = 0.1I_K$	1.0	1.0	1.0	1.3	Ω^*
e_N	Wideband Noise	$I_K = 100\mu\text{A}$, $10\text{Hz} \leq f \leq 10\text{kHz}$	70	70	70	70	μV_{RMS}^*
ΔV_R	Reverse Breakdown Voltage Long-term Stability	$t = 1000\text{hrs}$, $T = 25^\circ\text{C}$, $I_K = 100\mu\text{A}$	120	120	120	120	ppm*

*Typical.

Guaranteed Electrical Characteristics, FAN4040-3.3, Extended Temperature Range

(T_A = 25°C unless otherwise specified, in free air)

The • denotes specifications which apply over the full operating temperature range.

Symbol	Parameter	Conditions	Limits				Units
			A	B	C	D	
V _R	Reverse Breakdown Voltage	I _K = 100μA	3.300	3.300	3.300	3.300	V*
TCV _R	Reverse Breakdown Voltage Tolerance	I _K = 100μA	±3.3 • ±30	±6.6 ±35	±17 ±42	±33 ±65	mV mV
I _{RMIN}	Minimum Operating Current		• 70	70	70	75	μA
ΔV _R /ΔT	Reverse Breakdown Voltage Temperature Coefficient	I _K = 1mA	• ±100	±100	±100	±150	ppm/°C
ΔV _R (ΔI _K)	Reverse Breakdown Voltage Change with Operating Current	I _{RMIN} ≤ I _K ≤ 1mA 1mA ≤ I _K ≤ 15mA 1mA ≤ I _K ≤ 25mA	• 1.5 • 10 12	1.5 10 12	1.5 10 12	1.5 13 15	mV mV mV*
Z _{KA}	Reverse Dynamic Impedance	I _K =1mA, f=120Hz, I _{AC} =0.1I _K	1.0	1.0	1.0	1.3	Ω*
e _N	Wideband Noise	I _K =100μA, 10Hz ≤ f ≤ 10kHz	70	70	70	70	μV _{RMS} *
ΔV _R	Reverse Breakdown Voltage Long-term Stability	t=1000hrs, T=25°C, I _K =100μA	120	120	120	120	ppm*

*Typical.

Guaranteed Electrical Characteristics, FAN4040-5.0, Extended Temperature Range

(T_A = 25°C unless otherwise specified, in free air)

The • denotes specifications which apply over the full operating temperature range.

Symbol	Parameter	Conditions	Limits				Units
			A	B	C	D	
V _R	Reverse Breakdown Voltage	I _K = 100μA	5.00	5.00	5.00	5.00	V*
TCV _R	Reverse Breakdown Voltage Tolerance	I _K = 100μA	±5 • ±50	±10 ±60	±24 ±70	±50 ±100	mV mV
I _{RMIN}	Minimum Operating Current		• 100	100	100	100	μA
ΔV _R /ΔT	Reverse Breakdown Voltage Temperature Coefficient	I _K = 1mA	• ±100	±100	±100	±150	ppm/°C
ΔV _R (ΔI _K)	Reverse Breakdown Voltage Change with Operating Current	I _{RMIN} ≤ I _K ≤ 1mA 1mA ≤ I _K ≤ 15mA 1mA ≤ I _K ≤ 25mA	• 1.5 • 10 10	1.5 10 10	1.5 10 10	1.5 15 12	mV mV mV*
Z _{KA}	Reverse Dynamic Impedance	I _K =1mA, f=120Hz, I _{AC} =0.1I _K	1.0	1.0	1.0	1.3	Ω*
e _N	Wideband Noise	I _K =100μA, 10Hz ≤ f ≤ 10kHz	70	70	70	70	μV _{RMS} *
ΔV _R	Reverse Breakdown Voltage Long-term Stability	t=1000hrs, T=25°C, I _K =100μA	120	120	120	120	ppm*

*Typical.


Mechanical Dimensions

SOT-23 Package

Symbol	Inches		Millimeters		Notes
	Min.	Max.	Min.	Max.	
A	.035	.044	.89	1.12	
A1	.0004	.004	.01	.10	
B	.012	.020	.30	.50	
c	.003	.008	.08	.20	
D	.110	.120	2.80	3.04	
E	.047	.055	1.20	1.40	
e	.037 BSC		.95 BSC		
e1	.075 BSC		1.90 BSC		
H	.083	.104	2.10	2.64	
L	.021 REF		.54 REF		
S	.016 Nom		.395 Nom		

Notes:

1. Dimensions are inclusive of plating.
2. Dimensions are exclusive of mold flash & metal burr.
3. Comply to JEDEC TO-236.
4. This drawing is for matrix leadframe only.

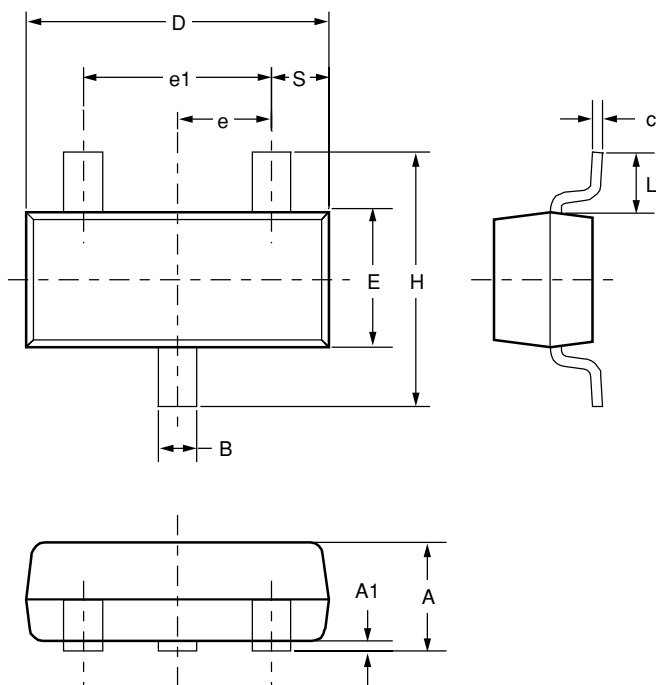

Ordering Information

Example: FAN4040DIS325X ('X' denotes Tape and Reel)

<u>FAN4040</u>	<u>D</u>	<u>I</u>	<u>S3</u>	<u>25</u>
	Grade	Temperature	Package	Voltage
	0.1% = A*	-40°C to 85°C – I	SOT23 = S3	2.5V = 25
	0.2% = B	-40°C to 125°C – E		3.3V = 33
	0.5% = C			5.0V = 5
	1.0% = D			

* 'A' grade is a special order. Please contact factory for availability.

SOT-23 Package Marking Information

Only 3 fields of marking are possible on an SOT-23. This table gives the meaning of these fields.

Example: F2A

<u>F</u>	<u>2</u>	<u>A</u>
	Voltage	Grade
	2.5V = 2	0.1% = A
	3.3V = 3	0.2% = B
	5.0V = 5	0.5% = C
		1.0% = D

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.

Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (XC), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

Перечень производителей, продукцию которых мы поставляем на российский рынок





Trade Electronics.ru

гарантия бесперебойности производства и
качества выпускаемой продукции

С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

<http://www.tradeelectronics.ru/>