

ATP Industrial Grade Endura Specification

Revision 1.4



Disclaimer:

ATP Electronics Inc. shall not be liable for any errors or omissions that may appear in this document, and disclaims responsibility for any consequences resulting from the use of the information set forth herein.

The information in this manual is subject to change without notice.

ATP general policy does not recommend the use of its products in life support applications where in a failure or malfunction of the product may directly threaten life or injury.

All parts of the ATP documentation are protected by copyright law and all rights are reserved. This documentation may not, in whole or in part, be copied, photocopied, reproduced, translated, or reduced to any electronic medium or machine-readable form without prior consent, in writing, from ATP Corporation.

The information set forth in this document is considered to be “Proprietary” and “Confidential” property owned by ATP.

Revision History

Date	Version	Changes compared to previous issue
Dec. 16 th , 2011	1.0	- 1 st version
Feb. 8 th , 2012	1.1	- Revised dimensions
May. 22 nd , 2012	1.2	- Add 8GB product
Aug. 3 rd , 2012	1.3	- Revised 2GB P/N and Performance
Aug. 20 th , 2012	1.4	- Revised 512MB P/N and Performance

Images



**Laser engraving logo and letters.*

Capacities

ATP UFD P/N	CAPACITY	COLOR
AF512UFEDBK(I)-AABXX	512MB	Black
AF1GUFEDBK(I)-8AAXX	1GB	Black
AF2GUFEDBK(I)- JABXX	2GB	Black
AF4GUFEDBK(I)-JABXX	4GB	Black
AF8GUFEDBK(I)-9AAXX	8GB	Black

Features

USB Interface	UFD Feature
- High Speed USB 2.0 (480Mbps) compliant and backward compatible with USB1.1 (12Mbps) - True “Plug and play” connection support hot swap.	- SIP technology with SLC NAND Flash - Color - Black

System Support
- No driver needed for Windows 7 / Vista / 2000 / ME / XP, Mac. OS 9.x or above. Linux Kernel 2.4.0 or above - Device driver is needed for Windows 98SE

Your Ultimate Memory Solution!



Electrical Specifications

Symbol	Parameter	Min.	Typ.	Max.	Unit
Vcc	Recommend Supply Voltage	4.5	5.0	5.5	V
Vpeak	Peak Voltage on any pin	-0.3		5.5	V
Icc	Operating Current (read & write)		100		mA
Isb	Standby Current		50		mA

Environment Specifications:

Parameter		Value
Temperature	Operating	-40°C to 85°C
	Non-Operating	-40°C to 85°C
Humidity	Operating	25 °C, 95% RH
	Non-Operating	40 °C, 93% RH
ESD (IEC61000-4-2)	Non contact pads	+/- 15KV (Air discharge)
	Contact pads	+/- 8KV (Coupling plane discharge)
	Contact pads	+/- 4KV
Salt Water Spray	Non-Operating	3%NaCl/35, Over 85%RH, 24hours
Drop Test	Non-Operating	150cm/free fall, total 6 drops
Random Vibration	Non-Operating	10~2000Hz, 6 Grms, 30 mins per axis
UV Light Exposure Test	Non-Operating	254nm, 15Ws/cm2

Reliability:

MTBF@25°C: >5,000,000 hours (Telcordia/Bellcore SR-332)

Dynamic and Static wear leveling algorithm to improve the endurance

Endurance : SLC flash block >60,000 Program/Erase cycles

Performance:

Type	Parameter	Value
512MB	Sequential read	up to 18MByte/s
	Sequential write	up to 12MByte/s
1GB	Sequential read	up to 35MByte/s
	Sequential write	up to 17MByte/s
2GB	Sequential read	up to 31MByte/s
	Sequential write	up to 14MByte/s
4GB	Sequential read	up to 33MByte/s
	Sequential write	up to 22MByte/s
8GB	Sequential read	up to 20MByte/s
	Sequential write	up to 19MByte/s

Extra Features:


Type	Value
Water Proof	Yes
Dust Proof	Yes
ESD Proof	Yes
Shock Resistant	Yes

Certifications

- RoHS compliant
- CE certification
- FCC certification

Physical Dimension Specifications (Units in MM):

Type	Value
Length*	33.7mm +/- 0.3mm
Width	17.5mm +/- 0.25mm
Thickness	9.4mm +/- 0.25mm
Weight*	8 g Max.

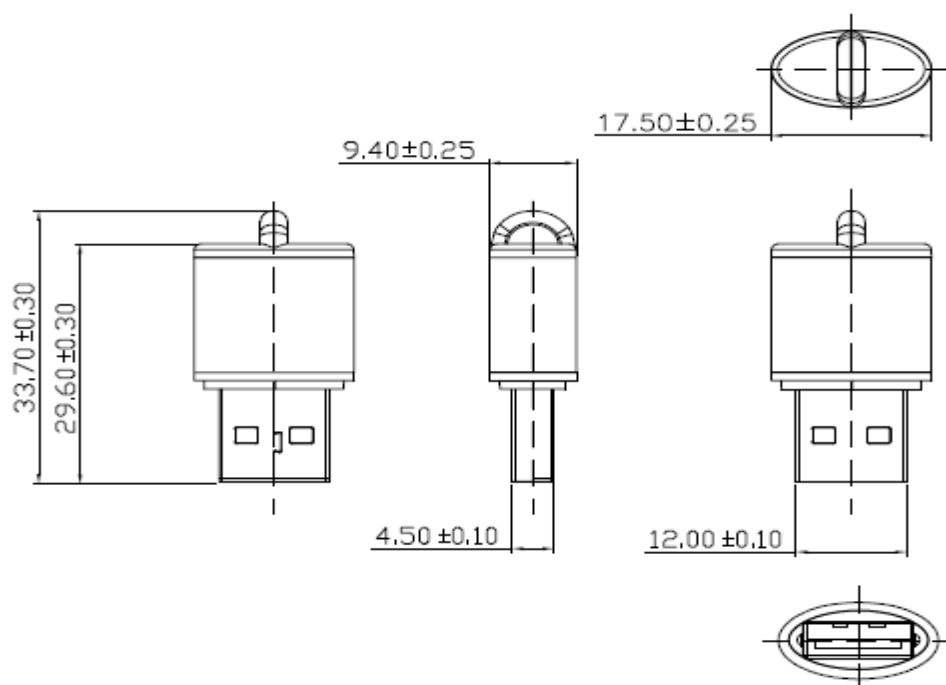Mechanical Form Factor (Units in MM)



О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.




Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (XC), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

Перечень производителей, продукцию которых мы поставляем на российский рынок





Trade Electronics.ru

гарантия бесперебойности производства и
качества выпускаемой продукции

С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

<http://www.tradeelectronics.ru/>