

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0039012020](#)
Status: **Active**
Overview: [minifit_jr](#)
Description: 4.20mm (.165") Pitch Mini-Fit Jr.™ Receptacle Housing, Dual Row, UL 94V-2, 2 Circuits

Documents:

3D Model	Product Specification PS-5556-001 (PDF)
Test Summary (PDF)	RoHS Certificate of Compliance (PDF)
Drawing (PDF)	

Agency Certification

CSA	LR19980
TUV	R72081037
UL	E29179

General

Product Family	Crimp Housings
Series	5557
Comments	Current = 13A max. per circuit when header is mated to a receptacle loaded with 45750 series terminals crimped to 16 AWG wire. . See Molex product specification PS-45750-001 for additional current de-rating information.. Glow Wire Equivalent Part Number 50361673
MolexKits	Yes
Overview	minifit_jr
Product Name	Mini-Fit Jr.™

Physical

Breakaway	No
Circuits (maximum)	2
Color - Resin	Natural
Flammability	94V-2
Gender	Female
Glow-Wire Compliant	No
Material - Resin	Nylon
Number of Rows	2
Packaging Type	Bag
Panel Mount	No
Pitch - Mating Interface (in)	0.165 In
Pitch - Mating Interface (mm)	4.20 mm
Pitch - Term. Interface (in)	0.165 In
Pitch - Term. Interface (mm)	4.20 mm
Polarized to Mating Part	Yes
Stackable	No
Temperature Range - Operating	-40°C to +105°C

Electrical


Current - Maximum per Contact	13A
-------------------------------	-----

Material Info

Old Part Number	5557-02R
-----------------	----------

Reference - Drawing Numbers

Packaging Specification	SPK-5557-001
Product Specification	PS-5556-001, RPS-5557-046

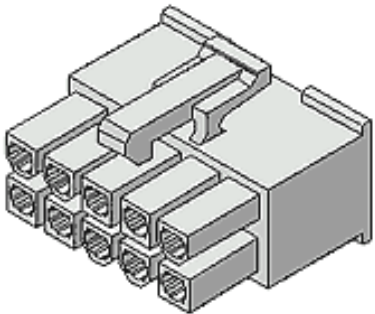

Series

image - Reference only

EU RoHS

**ELV and RoHS
Compliant**
**REACH SVHC
Contains SVHC: No**
**Halogen-Free
Status**

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
[5557Series](#)

Mates With



[5559d](#) , [5566vw](#) , [5566vwo](#) , [5569rdf](#) ,
[5569rdp](#) , [43810a](#) , [43810b](#) , [43810c](#) ,
[43810d](#) , [44068a](#) , [44068b](#) , [44068c](#) ,
[44068d](#) , [44281](#) , [44472dw](#) , [44472dwo](#) ,
[87427](#) , [87427r](#) , [87427rf](#) , [42404](#) , [44474](#) ,
[42440](#) , [43879](#) , [42475](#)

Use With

[5556](#) , [44476](#) , [44485](#) , [41995](#)

This document was generated on 06/08/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION



4 CKT SHOWN

NOTES:

1) MATERIAL:

*"BLANK" = NYLON 6/6, 94V-2, COLOR: NATURAL.

*"BL" = NYLON 6/6, 94V-2, COLOR: BLACK.

*"RE" = NYLON 6/6, 94V-2, COLOR: RED.

*"YE" = NYLON 6/6, 94V-2, COLOR: YELLOW

*"210" = NYLON 6/6, 94V-0, COLOR: NATURAL.

*"225" = NYLON (PA6), UL94V-0, COLOR: BLACK, IEC 60335-1, 4th EDITION
GLOW WIRE CAPABLE.

*"225N" = NYLON (PA6), UL94V-0, COLOR: WHITE, IEC 60335-1, 4th EDITION
GLOW WIRE CAPABLE.

*"400" = NYLON 6/6, 94V-0, COLOR: BLACK.

2) FINISH: NOT APPLICABLE

3) PRODUCT SPECIFICATION: PS-5556-001

4) PACKAGING: BULK

5) PART MATES WITH MOLEX PLUG #5559 AND HEADERS #5566, #5569.

6) PART TO BE USED WITH MOLEX FEMALE TERMINAL #5556.



7) PART IS NOT DESIGNED FOR CURRENT SHARING.

8) CONNECTORS ARE NOT TO BE MATED OR UNMATED WHILE CIRCUITS ARE LIVE.


9) WIRES ARE TO BE DRESSED IN SUCH A MANNER TO ALLOW THE TERMINALS
TO FLOAT FREELY IN THE POCKET.

10) PART CONFORMS TO CLASS "B" REQUIREMENTS OF COSMETIC SPECIFICATION
PS-45499-002 WITH THE EXCEPTION OF DISCOLORATION, FLASH AND SINK MEET
CLASS "C" REQUIREMENTS.


Δ 11 TO BE MEASURED AT SURFACE $\square$ Z

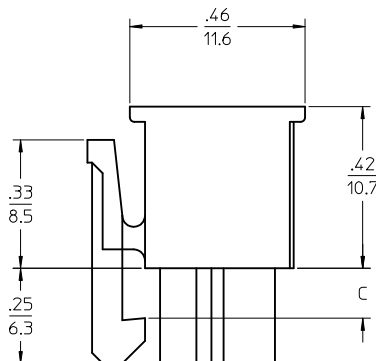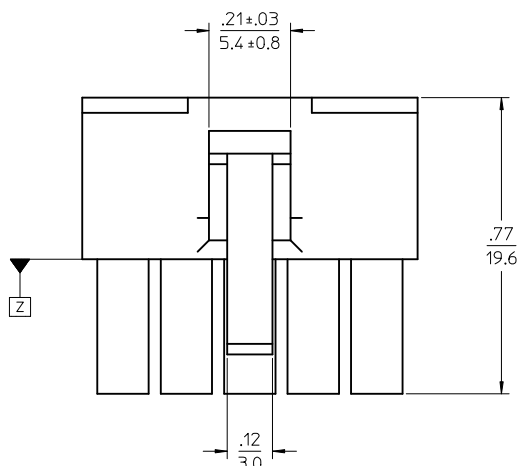

4-24 CKT




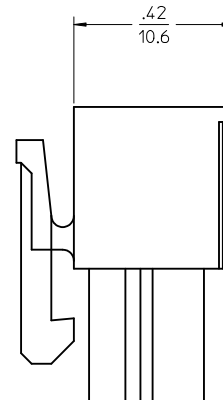


2 CKT ONLY

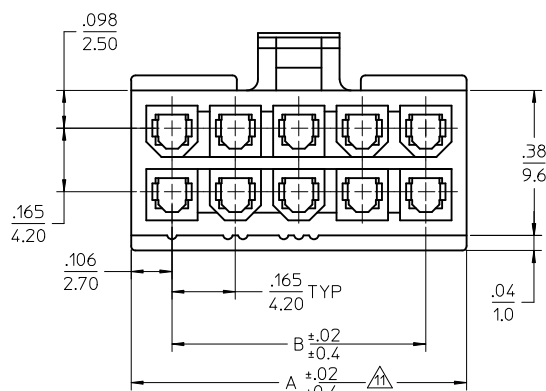

2.031/(51.6)	1.819/(46.2)		24
1.866/(47.4)	1.654/(42.0)		22
1.701/(43.2)	1.488/(37.8)	.142	20
1.535/(39.0)	1.323/(33.6)	(3.6)	18
1.370/(34.8)	1.157/(29.4)		16
1.205/(30.6)	0.992/(25.2)		14
1.039/(26.4)	0.827/(21.0)		12
0.874/(22.2)	0.661/(16.8)		10
0.709/(18.0)	0.496/(12.6)	.129	8
0.543/(13.8)	0.331/(8.4)	(3.3)	6
0.378/(9.6)	0.165/(4.2)		4
0.213/(5.4)	—		2
A	B	C	NO. OF CKTS.

MODIFIED ISO VIEW EC NO: UCP2010-2566 DRWN: JAGULAR 2010/04/05 CHKD: J.BELL 97/01/08 APPR: F.SMITH 2010/04/14 REV	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION				
		mm	INCH	DRAWN BY S.MOCHIZUKI	DATE '90/02/22	TITLE NEW MINI FIT CONN REC. HOUSING						
		4 PLACES ± --	± ---	CHECKED BY M.FUKUSHIMA	DATE '97/01/08							
		3 PLACES ± --	± .010	APPROVED BY M.FUKUSHIMA	DATE '97/01/08	MOLEX INCORPORATED						
		2 PLACES ± .25	± .015									
		1 PLACE ± 0.38	± ---									
		ANGULAR ± 3 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.				
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE SHEET 2		SD-5557-003		1 OF 2				
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										

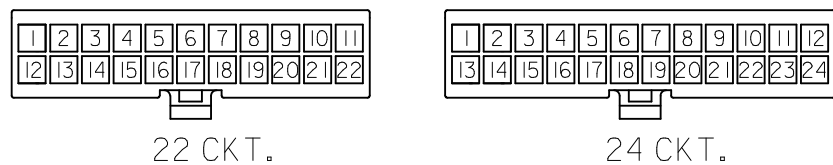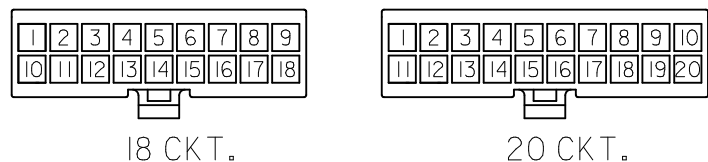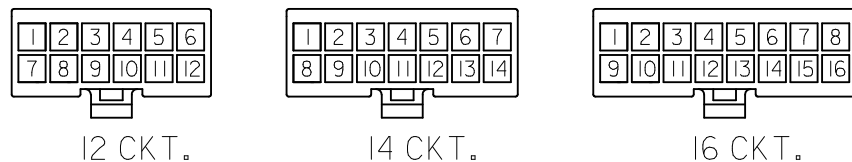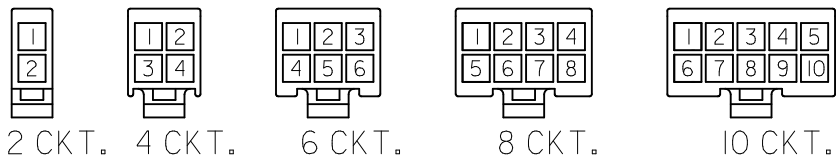

CIRCUIT SIZE LAYOUT
(NOT TO SCALE)

LEGEND

5557-**R - *
CIRCUIT SIZE
RECEPTACLE
MATERIAL (SEE NOTE 1)

V-0 GLOW WIRE (BLACK)				V-0 GLOW WIRE (WHITE)			
	50-36-1667	5557-24R-225	24	-	-	-	24
	26-01-3167	5557-22R-225	22	-	-	-	22
*	26-01-3166	5557-20R-225	20	-	-	-	20
	50-36-1668	5557-18R-225	18	-	-	-	18
	50-36-1669	5557-16R-225	16	-	-	-	16
	50-36-2293	5557-14R-225	14	-	-	-	14
	50-36-1674	5557-12R-225	12	-	-	-	12
	50-36-1671	5557-10R-225	10	-	-	-	10
	50-36-1713	5557-08R-225	8	-	-	-	8
	50-36-1672	5557-06R-225	6	-	-	-	6
	50-30-4461	5557-04R-225	4	50-36-2301	5557-04R-225N	-	4
	50-36-1673	5557-02R-225	2	-	-	-	2
	EDP. NO.	ENG. NO.	NO. OF CKTS.	EDP. NO.	ENG. NO.	NO. OF CKTS.	

V-0 (BLACK)				V-0 (NATURAL)			
*	39-03-9242	5557-24R-400	24	39-01-2245	5557-24R-210	24	
*	39-03-9222	5557-22R-400	22	39-01-2225	5557-22R-210	22	
*	39-03-9202	5557-20R-400	20	39-01-2205	5557-20R-210	20	
*	39-03-9182	5557-18R-400	18	39-01-2185	5557-18R-210	18	
*	39-03-9162	5557-16R-400	16	39-01-2165	5557-16R-210	16	
*	39-03-9142	5557-14R-400	14	39-01-2145	5557-14R-210	14	
*	39-03-9122	5557-12R-400	12	39-01-2125	5557-12R-210	12	
*	39-03-9102	5557-10R-400	10	39-01-2105	5557-10R-210	10	
*	39-03-9082	5557-08R-400	8	39-01-2085	5557-08R-210	8	
*	39-03-9062	5557-06R-400	6	39-01-2065	5557-06R-210	6	
	39-03-9042	5557-04R-400	4	39-01-2045	5557-04R-210	4	
	39-03-9022	5557-02R-400	2	39-01-2025	5557-02R-210	2	
	EDP. NO.	ENG. NO.	NO. OF CKTS.	EDP. NO.	ENG. NO.	NO. OF CKTS.	

* = CONSULT FACTORY FOR AVAILABILITY.

V-2 (YELLOW)				V-2 (RED)				V-2 (BLACK)				V-2 (NATURAL)			
			24	-	-	-	24	*	39-01-3245	5557-24R-BL	24	39-01-2240	5557-24R	24	
			22	-	-	-	22		39-01-3225	5557-22R-BL	22	39-01-2220	5557-22R	22	
			20	-	-	-	20	*	39-01-3205	5557-20R-BL	20	39-01-2200	5557-20R	20	
			18	-	-	-	18	*	39-01-3185	5557-18R-BL	18	39-01-2180	5557-18R	18	
			16	-	-	-	16	*	39-01-3165	5557-16R-BL	16	39-01-2160	5557-16R	16	
			14	-	-	-	14		39-01-3145	5557-14R-BL	14	39-01-2140	5557-14R	14	
			12	-	-	-	12		39-01-3125	5557-12R-BL	12	39-01-2120	5557-12R	12	
			10	-	-	-	10		39-01-3105	5557-10R-BL	10	39-01-2100	5557-10R	10	
			8	-	-	-	8		39-01-3085	5557-08R-BL	8	39-01-2080	5557-08R	8	
*	39-02-8061	5557-06R-YE	6	-	-	-	6		39-01-3065	5557-06R-BL	6	39-01-2060	5557-06R	6	
*	39-02-8041	5557-04R-YE	4	*	39-02-8040	5557-04R-RE	4		39-01-3045	5557-04R-BL	4	39-01-2040	5557-04R	4	
*	39-02-8021	5557-02R-YE	2	-	-	-	2		39-01-3025	5557-02R-BL	2	39-01-2020	5557-02R	2	
	EDP. NO.	ENG. NO.	NO. OF CKTS.	EDP. NO.	ENG. NO.	NO. OF CKTS.		EDP. NO.	ENG. NO.	NO. OF CKTS.		EDP. NO.	ENG. NO.	NO. OF CKTS.	

MODIFIED CHARTS
EC NO: UCP2010-2566
DRAWN: JAGUILAR 2010/04/05
CHKD: J.BELL '97/01/08
APPR: F.S.MITH 2010/04/14

REV
J4

QUALITY SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)
mm INCH
4 PLACES ±0.2 ± ---
3 PLACES ±0.3 ± ---
2 PLACES ±0.4 ± ---
1 PLACE ± --- ± ---
ANGULAR ± 3 °

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

SIZE
C

DIMENSION STYLE
MM ONLY

DRAWN BY
S.MOCHIZUKI

CHECKED BY
M.FUKUSHIMA

APPROVED BY
M.FUKUSHIMA

DATE
'90/02/22

DATE
'97/01/08

DATE
'97/01/08

SCALE
1:1

DESIGN UNITS
METRIC

THIRD ANGLE PROJECTION

NEW MINI FIT CONN
REC. HOUSING

MOLEX INCORPORATED

DOCUMENT NO.
SD-5557-003

SHEET NO.
2 OF 2

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION



О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.

Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (XC), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

Перечень производителей, продукцию которых мы поставляем на российский рынок





Trade Electronics.ru

гарантия бесперебойности производства и
качества выпускаемой продукции

С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

<http://www.tradeelectronics.ru/>