

## MEMORY HiCORDER 8807-01, 8808-01

Recorders 

**Detachable**



CE

*\* Photo shows the 8808-01 with optional printer unit installed.*

New Concept with Detachable Printer

## Compact Size Recorder with Color Display

The MEMORY HiCORDERs 8807-01/8808-01, housed in a B5 book-sized, compact, and thin body weighing in at under 1.2 kg, are handy high-speed recorders equipped with features such as analog 4-channel (8807-01: 2-channel) isolated inputs, PC card slot, RS-232C communication, 3-way power supply, and powerful trigger functions. One unit is capable of covering a variety of usages, ranging from low-speed/long-term continuous recording to recording of high-speed transients.

### Enhanced Model with Harmonic Analysis Function ... 8807-51/8808-51

To the MEMORY HiCORDERs 8807-01/8808-01 with their popular detachable printers, HIOKI has added the MEMORY HiCORDERs 8807-51/8808-51 with harmonic analysis function. Capable of both instantaneous analysis and time series analysis of harmonics, these units can measure and analyze harmonic current flowing into and out of a commercial power system, as well as harmonic components piggybacking on power line voltage.



*Note) The waveform recording functions of the MEMORY HiCORDERs 8807-51 and 8808-51 are identical to those of the \*\*\*\*-01 models. For details on specifications those concerning the harmonic wave analysis functions, refer to the catalog for the MEMORY HiCORDER: 8807-51 and 8808-51.*



ISO 9001  
JMI-0216



ISO 14001  
JQA-E-90091



[www.hioki.com](http://www.hioki.com)

HIOKI company overview, new products, environmental considerations and other information are available on our website.

# Recording Intermittent Leakage, Engine Performance and Relay Timing



## -Application Examples-

Unpredictable intermittent leakage is monitored unattended by recording instantaneous waveforms of the leakage current and line voltage




For long-term monitoring, use the AC ADAPTER 9418-15 for the MEMORY HICORDER 8807-01 and the AC ADAPTER 9445-02/03 for the CLAMP ON LEAK HITESTER 3283


Monitor power line anomalies!

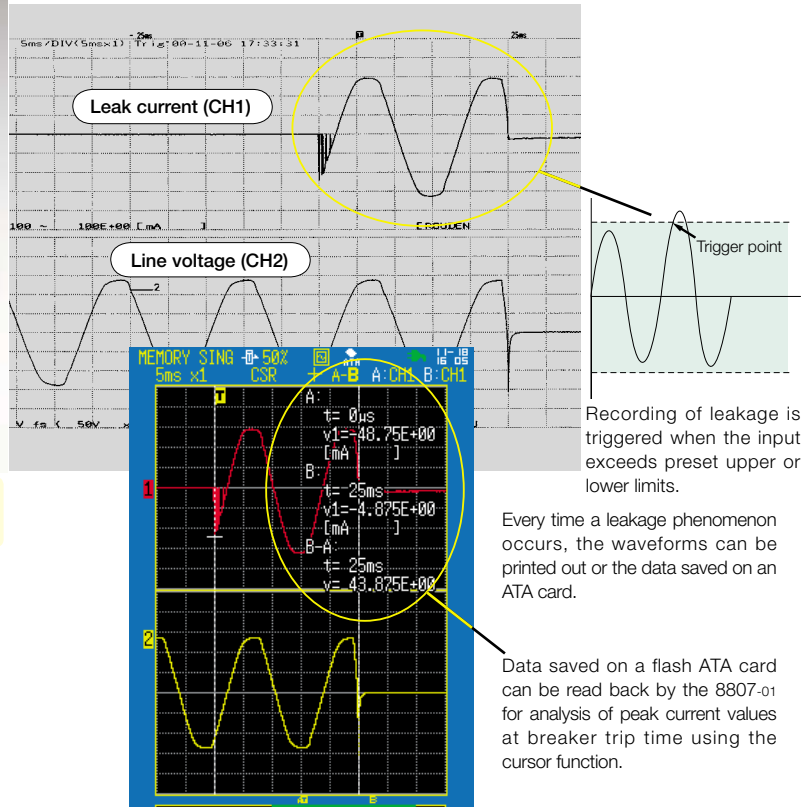


### Analysis of engine characteristics

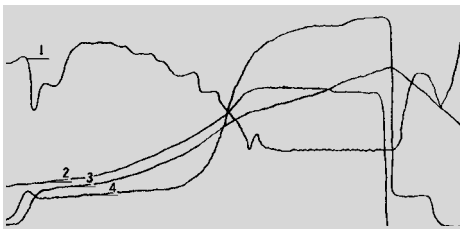

Allows the balance between boost, oil pressure, air fuel ratio, ignition timing, engine speed, injector aperture, etc., to be observed and recorded as waveforms.





### Analysis of Sequence Control Device Faults

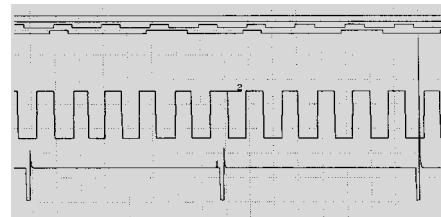

Abnormal halts and warnings issued by sequence control devices in manufacturing production and testing lines can be caused by AC power hits or low voltage. Such anomalous behavior can best be analyzed by setting the sequence relay signal as a trigger to record the abnormal AC power waveforms and DC voltage systems.


### Circuit breaker timing measurement

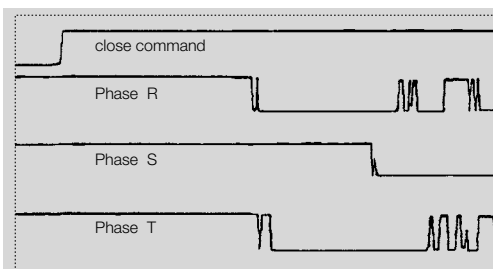

Circuit breaker cut-off in a power circuit can be investigated by analyzing the relationship of multi-point logic signals to the analog waveform. Up to eight channels are provided for recording relay operation using logic probes.

Use the model 9320-01 for non-voltage contact signals, and the LOGIC PROBE 9321-01 with isolated inputs for powered AC relay signals.

### Recording of motor rush current



Motor power-on inrush current waveforms can be precisely recorded. The CLAMP ON PROBES model 9018-10 and 9132-10 are available for current measurement, as is the CLAMP ON LEAK HITESTER 3283.

In addition, to measure direct current waveforms, a variety of sensors such as the UNIVERSAL CLAMP ON CTs model 9277, 9278 and 9279 are available upon request.

# High-Speed Response for Capturing Transient Events


## - Memory recorder function -

### Operation of the memory recorder functions

The input signal is converted<sup>\*1</sup> to digital data that are stored in the internal memory. The data can then be displayed on the screen or printed out on paper<sup>\*2</sup>. Once recorded, data are backed up for five years by the internal battery, provided that the start button is not pressed a second time (trigger mode: one-shot). The necessary parts can be searched out on the screen so that only the required waveforms are printed out<sup>\*2</sup>.

<sup>\*1</sup> The data sampling speed (sampling rate) is automatically set at 1/80 of the time axis range. E.g., at 200  $\mu$ s/division the sampling rate is 2.5  $\mu$ s, at 5 minutes/division, the sampling rate becomes 3.75 sec.

<sup>\*2</sup> The optional PRINTER UNIT 8992 is required.

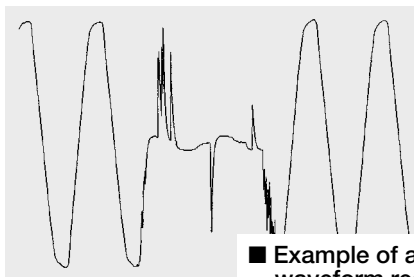

■ Example of abnormal waveform recording

Waveform captured using the voltage-drop detection trigger. This allows recording of the waveforms of momentary voltage drops in power lines.

### Trigger functions capable of monitoring all 4 channels<sup>\*3</sup>



For all of the measurement functions, including recorder and memory recorder, triggers can be set on all 4 analog input channels and the 8 logic input channels. In addition to a simple level trigger based on comparison with a single voltage value, the following trigger conditions are also available:

- Window in/out trigger based on comparison of 2 voltage values
- Voltage drop trigger for AC power lines<sup>\*4</sup>
- RMS level trigger based on rms values<sup>\*5</sup>
- Waveform judgement trigger<sup>\*4</sup> monitoring the waveforms of AC power lines in real-time
- Pattern trigger monitoring the ON/OFF condition of a logic signal


<sup>\*3</sup> MEMORY HiCORDER 8808-01. 2 channels in the case of the MEMORY HiCORDER 8807-01.

<sup>\*4</sup> Memory recorder function only. For 50/60 Hz only.

<sup>\*5</sup> RMS recorder function only. For 50/60 Hz only.

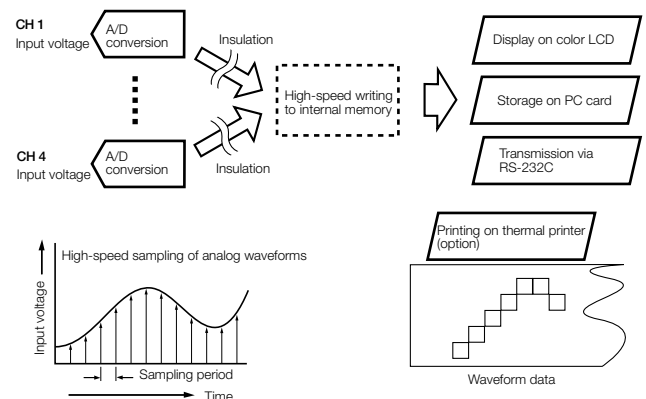

| Time axis       | Sampling period | 1-channel setting<br>256 kW/ch 3200 divisions | 4-channel setting<br>64 kW/ch 800 divisions |
|-----------------|-----------------|-----------------------------------------------|---------------------------------------------|
| 200 $\mu$ s/DIV | 2.5 $\mu$ s     | 640 ms                                        | 160 ms                                      |
| 400 $\mu$ s/DIV | 5 $\mu$ s       | 1.28 s                                        | 320 ms                                      |
| 1ms/DIV         | 12.5 $\mu$ s    | 3.2 s                                         | 800 ms                                      |
| 2ms/DIV         | 25 $\mu$ s      | 6.4 s                                         | 1.6 s                                       |
| 5ms/DIV         | 62.5 $\mu$ s    | 16 s                                          | 4 s                                         |
| 10ms/DIV        | 125 $\mu$ s     | 32 s                                          | 8 s                                         |
| 20ms/DIV        | 250 $\mu$ s     | 1 m 4 s                                       | 16 s                                        |
| 50ms/DIV        | 625 $\mu$ s     | 2 m 40 s                                      | 40 s                                        |
| 100ms/DIV       | 1.25 ms         | 5 m 20 s                                      | 1 m 20 s                                    |
| 200ms/DIV       | 2.5 ms          | 10 m 40 s                                     | 2 m 40 s                                    |
| 500ms/DIV       | 6.25 ms         | 26 m 40 s                                     | 6 m 40 s                                    |
| 1s/DIV          | 12.5 ms         | 53 m 20 s                                     | 13 m 20 s                                   |
| 2s/DIV          | 25 ms           | 1 h 46 m 40 s                                 | 26 m 40 s                                   |
| 5s/DIV          | 62.5 ms         | 4 h 26 m 40 s                                 | 1 h 6 m 40 s                                |
| 10s/DIV         | 125 ms          | 8 h 53 m 20 s                                 | 2 h 13 m 20 s                               |
| 30s/DIV         | 375 ms          | 1 day 2 h 40 m                                | 6 h 40 m                                    |
| 1min/DIV        | 750 ms          | 2 days 5 h 20 m                               | 13 h 20 m                                   |
| 2min/DIV        | 1.5 s           | 4 days 10 h 40 m                              | 1 day 2 h 40 m                              |
| 5min/DIV        | 3.75 s          | 11 days 2 h 40 m                              | 2 days 18 h 40 m                            |

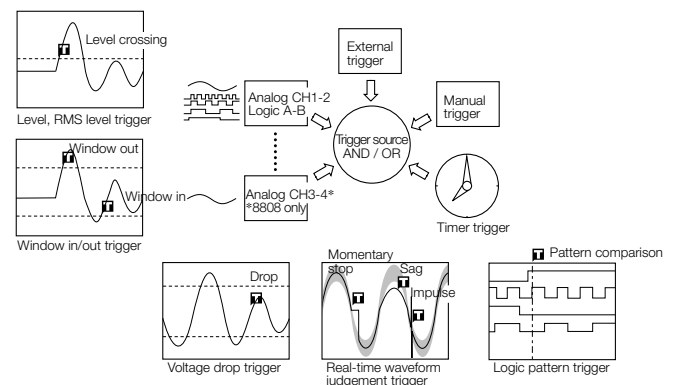

### Real-time waveform judgement trigger with constant monitoring of the voltage waveforms of AC power lines

(Memory recorder function only)<sup>\*6</sup>

The waveform judgement trigger constantly monitors the AC power line for irregular waveforms. There are two ways to use this trigger. One cycle of measured waveforms is observed with the judgement area automatically created from the immediately preceding cycle waveform, or the judgement area can be automatically created from the ideal sine wave. In both cases, the trigger activates when the signal is detected to move outside the reference area. This allows real-time monitoring of phenomena in AC power lines that existing level triggers have not been able to capture, such as momentary stops, sags, and impulses. The level trigger can be set separately for each analog channel. Also, when the printer is connected, the judgment area automatically generated from the ideal sine wave can be printed as an overlay with the measurement waveform.


<sup>\*6</sup> The time axis can be used for all ranges above 10 ms/DIV (version 2.20 or later).

# - RMS Recorder, Recorder functions -

## RMS recorder function


This function is exclusively for use on 50/60 Hz power-supply lines and DC. High-speed sampling is applied to calculate the rms value from the waveform data\*<sup>1</sup>, and the result is recorded as a graph.

\*<sup>1</sup> Using 250  $\mu$ s high-speed sampling, data for three waveforms are captured for calculating the rms value. This process is repeated 800 times per second using the moving average method, resulting in high-speed response.

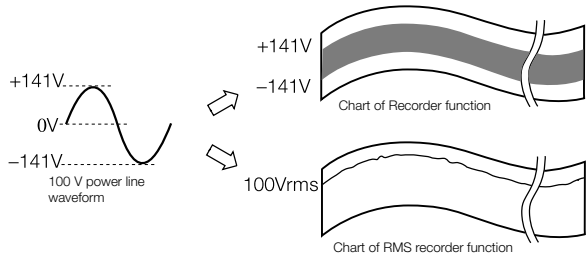

### ■ RMS Recorder & Memory function


If an abnormal event is detected by triggers during real-time recording of signals using the RMS recorder, it is stored in memory by the high-speed sampling memory recorder. The RMS recorder function works independently and never stops. This function is highly convenient when it is desirable to record both abnormal phenomena and normal level fluctuations.

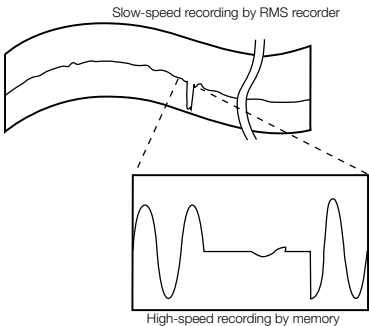

## Recorder function operation

The input signal is converted to digital form and displayed or printed\*<sup>2</sup> in real-time. The chart speed is maximum 10 mm/s (in the 1s/division range)\*<sup>3</sup>. Even with the real-time recording, the last 400 divisions of the waveform can be observed by scrolling or reprinting the data\*<sup>2</sup>.


\*<sup>2</sup> The optional 8992 PRINTER UNIT is required.  
\*<sup>3</sup> Only when using the AC Adapter. When using batteries, the maximum speed is 5 mm/s (2 s/division range).

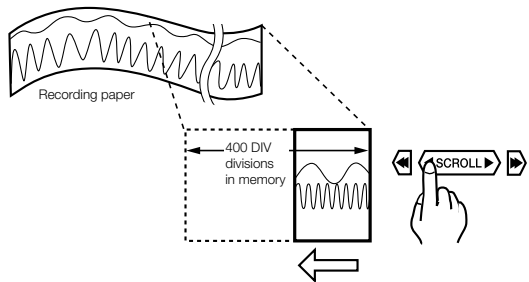

Recorder recording time Actual operation conditions are assumed, and it is assumed that 30 cm of the length of the recording paper is not used, for a total of 1770 divisions

### ■ X-Y Recorder format

This function allows two signals converted to digital form to be combined in an x-y plot and stored in memory. Any of the four analog channels can be used for an x-y plot, but only one plot can be combined. The X-Y plot can be viewed in real-time on the display, and there is no limit on the recording time. The waveforms can also be printed out as many times as desired.

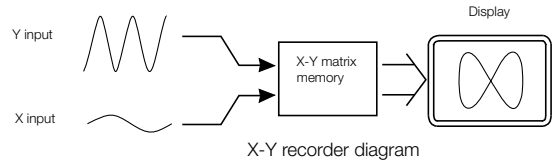

| Time axis  | Chart speed             | Sampling period | Approximate recording time with one roll of recording paper (18 m) |
|------------|-------------------------|-----------------|--------------------------------------------------------------------|
| 100 ms/DIV | Printer not required    | 2.5 $\mu$ s     | Stored in memory only : 40 s                                       |
| 200 ms/DIV |                         |                 | Stored in memory only : 1 m 20 s                                   |
| 500 ms/DIV |                         |                 | Stored in memory only : 3 m 20 s                                   |
| 1 s/DIV    | AC Adapter used 10 mm/s | 2.5 $\mu$ s     | AC Adapter used : 29 m 30 s                                        |
| 2 s/DIV    | 5 mm/s                  | 2.5 $\mu$ s     | 59 m                                                               |
| 5 s/DIV    | 2 mm/s                  | 2.5 $\mu$ s     | 2 h 27 m 30 s                                                      |
| 10 s/DIV   | 1 mm/s                  | 2.5 $\mu$ s     | 4 h 55 m                                                           |
| 30 s/DIV   | 20 mm/s                 | 2.5 $\mu$ s     | 14 h 45 m                                                          |
| 1 min/DIV  | 10 mm/s                 | 2.5 $\mu$ s     | 1 day 5 h 30 m                                                     |
| 2 min/DIV  | 5 mm/s                  | 2.5 $\mu$ s     | 2 days 11 h                                                        |
| 5 min/DIV  | 2 mm/s                  | 2.5 $\mu$ s     | 6 days 3 h 30 m                                                    |
| 10 min/DIV | 1 mm/s                  | 2.5 $\mu$ s     | 12 days 7 h                                                        |
| 30 min/DIV | 20 mm/h                 | 2.5 $\mu$ s     | 36 days 21 h                                                       |
| 1 h/DIV    | 10 mm/h                 | 2.5 $\mu$ s     | 73 days 18 h                                                       |

## - Data Communication with PC, other functions -

### Off-Line Data Exchange with a PC

Waveforms acquired by the memory recorder can be stored on flash ATA-PC cards. Stored waveform data can be converted to text (CSV) format files by the supplied **Wv** Waveform Viewer PC application program.

#### ■ Waveform Viewer software

Measurement data can be saved in binary format. Also, can be converted to text format for numerical analysis in a PC spreadsheet program.

Data can be saved in binary or text formats. The binary format is for data to be used in the **MEMORY HiCORDERs** 8807-01 and 8808-01. Data saved to the PC in binary format can be converted to text format using the supplied **Wv** (Waveform Viewer program), for loading into a spreadsheet program such as Excel.

#### ■ Display copy in BMP format


Displayed images can be saved in BMP format to easily create and print color reports from the PC's word processor.



Example showing measurement data imported to Excel.

### Convenient features for ease of operation

Convenient features such as the DMM function, special range for a clamp probe, numerical value calculation, scaling, A/B cursor measurement, free comment input, and automatic restart after power outage make the measurement work quick and simple.



#### ■ DMM Function

Digital Multi Meter functions are provided for simple input voltage checking. Selectable modes are Effective value mode (AC+DC), and Instantaneous value mode (DC), each displaying four numeric digits. When the scaling function is enabled, the specified scaling value is incorporated.


**Note:** Convenient for checking waveform recordings of power lines. RMS display is for 50/60 Hz or DC only.

#### ■ Special range for clamp probe enables easy current measurement \*1

Using the **CLAMP ON PROBE** 9018-10, current waveforms can be captured on live lines. Voltage range settings and scale settings are performed with a one-touch operation thanks to the special clamp probe range provided.

\*1 Only compatible with the **CLAMP ON PROBES** model 9018-10 and 9132-10.

The **CLAMP ON PROBES** model 9018 and 9132 can be connected using the **CONVERSION ADAPTER** 9199.

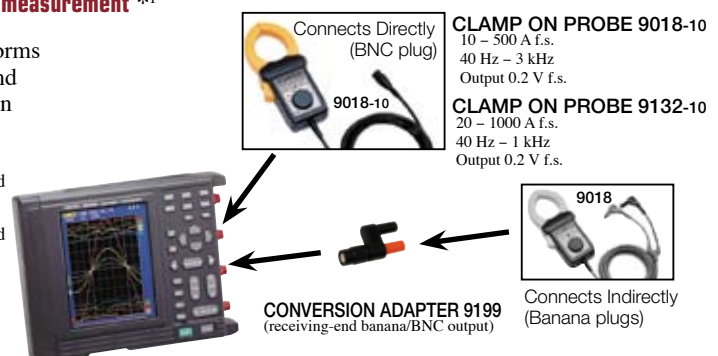

#### ■ RS-232C connection to PC

The PC and HiCORDER can be directly connected serially for transferring recorded data and remote settings. The software created by the user may be used on the PC.



-Specifications-

| Basic specifications (MEMORY HiCORDER 8807-01, 8808-01)                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                               |
|--------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Measurement functions                                                                                        | (1) Memory recorder, (2) Recorder, (3) RMS recorder & memory (50/60 Hz/ or DC only)                                                                                                                                                                                                                                                                                                                                           |
| Input type and number of channels                                                                            | <b>8807-01:</b> fixed input section, 2 analog + 8 logic, <b>8808-01:</b> fixed input section 4 analog + 8 logic<br>Isolated analog channels, isolated input and outputs, logic has common GND.                                                                                                                                                                                                                                |
| Maximum sampling rate                                                                                        | 400 k sample/s (2.5 μs cycle)<br>Simultaneous sampling for 2/4 analog + 8 logic channels                                                                                                                                                                                                                                                                                                                                      |
| Memory capacity                                                                                              | <b>8807-01:</b> (analog 12 bits + logic 4 bits) × 256 kilo-words/channel (CH1) to (analog 12 bits + logic 4 bits) × 128 kilo-words/channel (CH1, CH2)<br><b>8808-01:</b> (analog 12 bits + logic 4 bits) × 256 kilo-words/channel (CH1) to (analog 12 bits + logic 4 bits) × 64 kilo-words/channel (CH1 - CH4)                                                                                                                |
| External memory                                                                                              | PC card TYPE II slot × 1: flash ATA card (max. 1GB), MS-DOS format<br>Memory contents: Setting conditions, measurement data (binary, text), image data (BMP), calculation results (figures)                                                                                                                                                                                                                                   |
| Battery backup                                                                                               | Clock, waveform data, settings, battery life approx. 5 years (at 25 °C/ 77 °F)                                                                                                                                                                                                                                                                                                                                                |
| External control                                                                                             | Terminal block: trigger input/output                                                                                                                                                                                                                                                                                                                                                                                          |
| Interface                                                                                                    | <b>RS-232C interface:</b> 9-pin round connector terminal<br>(the optional RS-232C CABLE 9612 is required for connection to PC)<br><b>Printer interface:</b> PRINTER UNIT 8992 can be connected (option)                                                                                                                                                                                                                       |
| Environment (no condensation)                                                                                | Operation: +5 °C/41 °F to +40 °C/104 °F, 35% to 80% relative humidity.<br>Storage: -10 °C/14 °F to +50 °C/122 °F, 35% to 80% relative humidity.                                                                                                                                                                                                                                                                               |
| Applicable standards                                                                                         | <b>Safety:</b> EN61010<br><b>EMC:</b> EN61326, EN61000-3-2, EN61000-3-3                                                                                                                                                                                                                                                                                                                                                       |
| Power supplies<br><i>*1 Note: These LR6/AA alkaline batteries cannot be used with the PRINTER UNIT 8992.</i> | (1) <b>AC Adapter</b> model <b>9418-15</b> or <b>9418-10</b> (DC 12V ±10%)<br>(2) <i>*1</i> <b>LR6/AA alkaline batteries</b> × 6 (AC adapter has priority when used in combination with battery pack)<br>(3) <b>BATTERY PACK 9447</b> (AC adapter has priority when used in combination with battery pack, fast recharge possible with AC adapter)<br>(4) 12 V <b>Car battery</b> (Please contact HIOKI for connection cord). |
| Power consumption                                                                                            | <b>8807-01, 8808-01:</b> 15 VA max. (when using optional printer)                                                                                                                                                                                                                                                                                                                                                             |
| Continuous operation time                                                                                    | Approx. 3 hours (when using <b>BATTERY PACK 9447</b> )<br>Approx. 1 hours (when using <i>*1</i> alkaline batteries)                                                                                                                                                                                                                                                                                                           |
| Charge time                                                                                                  | With power switch OFF, approx. 2 hours fast charge (at 23 °C/ 73 °F)                                                                                                                                                                                                                                                                                                                                                          |
| Dimensions and mass                                                                                          | <b>8807-01, 8808-01:</b> approx. 203 (7.99) W × 170 (6.69) H × 52 (2.05) D mm (inch) (printer detached)<br><b>8807-01, 8808-01:</b> approx. 280 (11.02) W × 170 (6.69) H × 52 (2.05) D mm (inch) (printer attached)<br><b>8807-01:</b> approx. 1.1 kg/ 38.80 oz (printer detached) 1.5 kg/ 52.91 oz (printer attached)<br><b>8808-01:</b> approx. 1.2 kg/ 42.33 oz (printer detached) 1.6 kg/ 56.44 oz (printer attached)     |
| Supplied accessories                                                                                         | LR6/AA alkaline batteries ×6, alkaline battery box ×1, strap ×1, Application disk ×1                                                                                                                                                                                                                                                                                                                                          |

| Recording and display <i>*2</i> Waveform printing when the optional PRINTER UNIT 8992 is used. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Display method                                                                                 | 5.7-inch STN color LCD, with Japanese/English selector<br>240 × 320 dots                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <i>*2</i> Printer paper                                                                        | 112 mm (4.4 in) × 18 m (59.06 ft), thermal paper roll                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <i>*2</i> Recording width                                                                      | 10 divisions in full scale, 1 division = 10mm (0.39in) (80pixels)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <i>*2</i> Paper feed density                                                                   | 8 rows/mm (203 rows/in)<br>16 rows/mm (406 rows/in) using the memory recorder's smooth print function.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <i>*2</i> Recording speed                                                                      | Max. 10 mm/s (0.39 inch/s) (when using AC Adapter),<br>max. 5 mm/s (0.2 inch/s) (when using batteries)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Trigger function                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Trigger source                                                                                 | Analog input CH1 - CH4 ( <b>8807-01:</b> CH1 - CH2), logic input A - B, external, timer, manual (either ON or OFF for each source), logical AND/OR of sources                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Trigger types (Analog)                                                                         | <b>Level:</b> Triggerred when set voltage value is exceeded in UP or DOWN direction.<br><b>Window in/out:</b> When entering or exiting a level range defined by upper or lower limit<br><b>Voltage drop:</b> Only for AC 50/60 Hz power lines. Triggerred when the peak voltage falls below setting value<br><b>RMS level:</b> Only for DC and AC 50/60 Hz power lines. Triggerred when rms value crosses set value in UP or DOWN direction (RMS recorder function only)<br><b>Real-time waveform judgment:</b> Only for AC 50/60 Hz power lines. Trigger function that monitors when a signal exceeds the evaluation area (Memory recorder function only) |
| Level setting resolution                                                                       | 0.25% f.s., waveform judgment trigger only: 0.1% f.s. (f.s.=10 divisions)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Trigger types (Logic)                                                                          | Pattern trigger: 1, 0, or × (disregard), logical product (AND) or logical sum (OR) set for 4 channels                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Trigger filter (analog/logic)                                                                  | 9 settings from 0.1 to 10.0 divisions or OFF (memory recorder) ON/OFF (recorder)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

| Memory function  |                                                                                                                                                                                                               |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Time axis        | 200 μs to 5 minutes/division, 19 settings, time axis zoom ×2 to ×10; 3 settings, compression 1/2 to 1/500; 8 settings                                                                                         |
| Sampling period  | 1/80 of time axis ranges (minimum sampling period 2.5 μs)                                                                                                                                                     |
| Recording length | 20 to 3200*3 divisions<br><i>*3</i> Depending on the number of channels in use.                                                                                                                               |
| Pre-trigger      | Can record data from before the trigger point, 0 to 100 % or -95 % of recording length; 15 settings                                                                                                           |
| Other functions  | Numerical calculations, logging (numerical printout), X-Y waveform plot (one plot on the <b>8807-01</b> , up to three plots on the <b>8808-01</b> ), voltage axis zoom ×2 to ×10; 3 settings, compression 1/2 |


| Recorder function   |                                                                                                                                                                                                                                                                                                                                                 |
|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Time axis           | 100 ms*4 to 1 hr/division; 14 settings, 1 division = 80 samples, time axis compression 1/2 to 1/50; 5 settings<br><i>*4</i> 100 ms to 500 ms/division ranges shown only on display when using AC Adapter. 100 ms to 1 s/division ranges shown only on display when using batteries                                                              |
| Sampling period     | 2.5 μs fixed                                                                                                                                                                                                                                                                                                                                    |
| Recording length    | 20 to 400 divisions, "continuous"*5<br><i>*5</i> only "continuous" for X-Y plotting                                                                                                                                                                                                                                                             |
| X-Y sampling period | 250 μs; fixed (dot), 500 μs to 10 ms (line)                                                                                                                                                                                                                                                                                                     |
| X-Y axis resolution | 20 pixel/DIV (display), 80 pixels/DIV × 80 pixels/DIV (optional printer)                                                                                                                                                                                                                                                                        |
| Other functions     | Back-scroll of memory data (max. last 400 divisions) and reprinting of stored data (with/ optional printer), logging (numerical printout) (with/ optional printer), voltage axis magnification ×2 to ×10; 3 settings, compression 1/2; 1 setting. X-Y waveform plot (one plot on the <b>8807-01</b> , up to three plots on the <b>8808-01</b> ) |

| RMS Recorder & Memory function (for 50/60 Hz and DC) |                                                                                                                                                                                                                                                                                                                                                                                  |
|------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Time axis                                            | <b>RMS recorder:</b> 100 ms to 1 hr/division; 14 settings<br><b>Memory recorder:</b> 200 μs to 20 ms/division; 7 settings<br>1 division = 80 samples, time axis compression 1/2 to 1/50; 5 settings                                                                                                                                                                              |
| Sampling period                                      | <b>RMS recorder:</b> 250 μs fixed (800 RMS data/second)<br><b>Memory recorder:</b> 1/80 of time axis range                                                                                                                                                                                                                                                                       |
| RMS calculation accuracy                             | ±3% f.s.                                                                                                                                                                                                                                                                                                                                                                         |
| Recording length                                     | <b>RMS recorder:</b> 20 to 200 divisions, continuous<br><b>Memory recorder:</b> 20 to 400 divisions, OFF (only RMS recorder when OFF)                                                                                                                                                                                                                                            |
| Other functions                                      | Back-scroll of memory data (max. last 200 divisions) and reprinting of stored data (with/ optional printer), for memory recorder: back-scroll of memory data (max. last 400 divisions) and reprinting of stored data (with/ optional printer), logging (numerical printout) (w/ optional printer), voltage axis magnification ×2 to ×10; 3 settings, compression 1/2; 1 setting. |

| Auxiliary function                      |                                                                                                                                                                                                                                                                                                                                                            |
|-----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| General                                 | Printing of settings including input range, trigger time, etc., cursor measurement, scaling, comment input, screen hard copy, start condition retention, auto setup, auto saving, remote control, auto-range setting, list & gauge printing (with/ optional printer), DMM function (voltage shown as numerals on the display).                             |
| Calculation functions (Memory recorder) | Up to four arithmetic operations simultaneously<br>Average value, effective (RMS) value, peak to peak value, maximum value, time to maximum value, minimum value, time to minimum value, period, and frequency, area, X-Y area.                                                                                                                            |
| DMM function                            | <b>Display update rate:</b> 1 s, display contents: <b>AC+DC</b> rms (measurement signal is DC, 50/60Hz only), or <b>DC</b> instantaneous value<br><b>Display digits:</b> 4 digits (last digit 0 to 4 is rounded zero, 5 to 9 is rounded five)<br><b>Voltage range:</b> Auto only (10 mV to 100 V/division, 5 settings)<br><b>Accuracy:</b> ±3% rdg. ±5dgt. |


| Analog input (accuracy at 23 ±5 °C/73 ±9 °F after 30 minutes warm-up time; accuracy guaranteed for 1 year) |                                                                                                                                                                                                                                                                                                                                          |
|------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Input                                                                                                      | <b>Terminal:</b> isolated BNC Inter-channel and input-frame isolation                                                                                                                                                                                                                                                                    |
| Measurement range                                                                                          | <b>MEM or REC function:</b> 10mV to 100V/DIV, 13 settings<br><b>RMS recorder function:</b> 5mV to 50V/DIV, 13 settings<br>full-scale (f.s.) = 10 divisions, <b>AC voltage for possible measurement / display using the memory function:</b> 450 V AC rms, <b>low-pass filter:</b> 5/500 Hz, the measurement resolution is 1/160 of range |
| Maximum sampling rate                                                                                      | 400 kS/s (simultaneous sampling of all channels)                                                                                                                                                                                                                                                                                         |
| Accuracy, frequency characteristics                                                                        | ±0.5% f.s., DC to 50 kHz ±3 dB                                                                                                                                                                                                                                                                                                           |
| Input resistance and capacitance                                                                           | 1 MΩ, 7 pF approx. (at 100 kHz)                                                                                                                                                                                                                                                                                                          |
| Input coupling                                                                                             | DC, GND                                                                                                                                                                                                                                                                                                                                  |
| Max. allowable input                                                                                       | 450 V AC rms, DC<br>(upper voltage which when applied to between input pins does not damage them)                                                                                                                                                                                                                                        |
| Max. rated voltage to earth                                                                                | 450 V AC, DC (upper voltage which when applied to input channel casing or between input channels does not damage them)                                                                                                                                                                                                                   |

## ■ Appearance and Dimensions (8807-01 and 8808-01 Instrument-only)

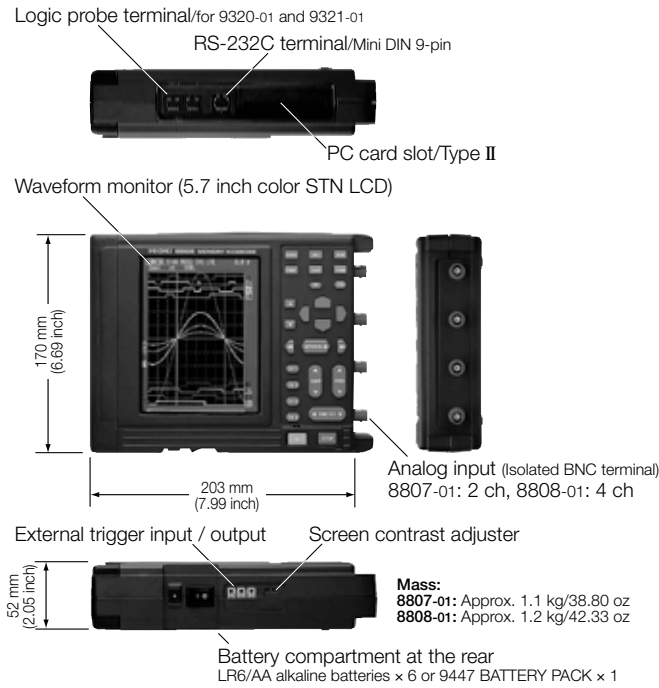

**Mass:**  
8807-01: Approx. 1.1 kg/38.80 oz  
8808-01: Approx. 1.2 kg/42.33 oz

## ■ Appearance and Dimensions (8807-01 and 8808-01 with printer attached)

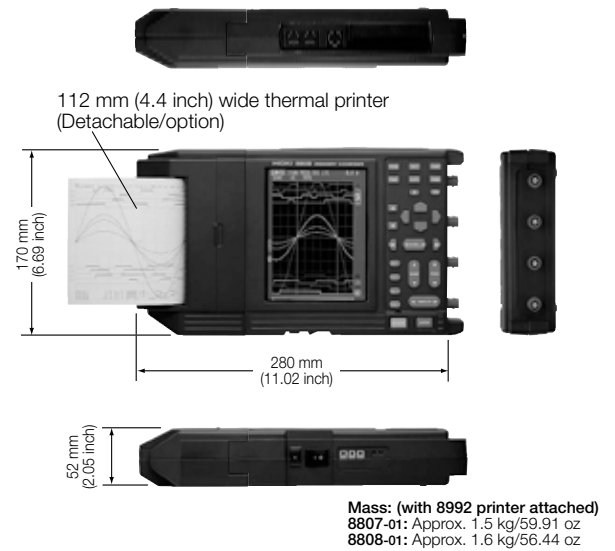

**Mass: (with 8992 printer attached)**  
8807-01: Approx. 1.5 kg/59.91 oz  
8808-01: Approx. 1.6 kg/56.44 oz

## ■ Supplied accessory PC Software Specifications

| Wave Viewer (Wv) Software (Application disk CD-R, bundled accessory) |                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|----------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Functions                                                            | <ul style="list-style-type: none"> <li>• Quick display of waveform files</li> <li>• Text conversion: Conversion of binary data files to text format, with storage in either CSV or space/tab delimited format. Span specification and data culling available.</li> <li>• Display format settings: scroll function, enlarge/reduce display, display CH settings.</li> <li>• Other: Voltage trace function, jump to cursor/trigger position function, etc.</li> </ul> |
| Compatible operating systems                                         | Windows 95/98/Me or Windows NT 4.0 (SP3 or later), 2000, XP                                                                                                                                                                                                                                                                                                                                                                                                         |

## ■ Specifications of Options (sold separately)

**Cable length and mass:** Main unit cable 1.5 m (4.92 ft), input section cable 30 cm (0.98 ft), approx. 150 g (5.3 oz)

**Note:** The unit-side plug of the 9320-01 is different from the 9320.

| LOGIC PROBE 9320-01 (Accuracy at 23 ±5°C/73 ±9°F, 35 to 80% rh; accuracy guaranteed for 1 year) |                                                                                                                                                                                                                                                                                                                                    |
|-------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Function                                                                                        | Detection of voltage signal or relay contact signal for High/Low state recording                                                                                                                                                                                                                                                   |
| Input                                                                                           | 4 channels (common ground between unit and channels), digital/contact input, switchable (contact input can detect open-collector signals), <b>input impedance:</b> 1MΩ (with digital input, 0 to +5V), 500kΩ or more (with digital input, +5 to +50V), <b>pull-up resistance:</b> 2kΩ (contact input: internally pulled up to +5V) |
| Digital input threshold                                                                         | 1.4V/2.5V/4.0V                                                                                                                                                                                                                                                                                                                     |
| Contact input detection resistance                                                              | 1.5kΩ or higher (open) and 500Ω or lower (short), 3.5kΩ or higher (open) and 1.5kΩ or lower (short), 25kΩ or higher (open) and 8kΩ or lower (short)                                                                                                                                                                                |
| Response speed                                                                                  | 9320-01: 500ns or lower                                                                                                                                                                                                                                                                                                            |
| Max. allowable input                                                                            | 0 to +50V DC (the maximum voltage that can be applied across input pins without damage)                                                                                                                                                                                                                                            |

**Cable length and mass:** Main unit cable 1.3 m (4.27 ft), input section cable 46 cm (1.51 ft), approx. 350 g (12.3 oz)


| DIFFERENTIAL PROBE 9322 (Accuracy at 23 ±5°C/73 ±9°F, 35 to 80% rh, after 30 minutes of warm-up time; accuracy guaranteed for 1 year) |                                                                                                                                                                                                                                                                                                       |
|---------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Function                                                                                                                              | For high-voltage floating measurement, power line surge noise detection, RMS rectified output measurement                                                                                                                                                                                             |
| DC mode                                                                                                                               | For waveform monitor output, frequency characteristics: DC to 10MHz (±3dB), <b>amplitude accuracy:</b> ±1% of full scale (at max. 1000V DC), ±3% of full scale (at max. 2000V DC) (full scale: 2000V DC)                                                                                              |
| AC mode                                                                                                                               | For detection of power line surge noise, frequency characteristics: 1kHz to 10MHz ±3dB                                                                                                                                                                                                                |
| RMS mode                                                                                                                              | DC/AC voltage RMS output detection, frequency characteristics: DC, 40Hz to 100k Hz, <b>response speed:</b> 200ms or less (400V AC), <b>accuracy:</b> ±1% of full scale (DC, 40Hz to 1kHz), ±4% of full scale (1kHz to 100kHz) (full scale: 1000V AC)                                                  |
| Input                                                                                                                                 | <b>Input type:</b> balanced differential input, <b>input impedance/capacitance:</b> H-L 9MΩ/10pF, H/L-unit 4.5MΩ/20pF, <b>Max. rated voltage to earth:</b> when using grabber clip: 1500V AC/DC (CAT II), 600V AC/DC (CAT III), when using alligator clip: 1000V AC/DC (CAT II), 600V AC/DC (CAT III) |
| Maximum allowable input voltage                                                                                                       | 2000V DC, 1000V AC (CAT II), 600V AC/DC (CAT III)                                                                                                                                                                                                                                                     |
| Output                                                                                                                                | Voltage divider for 1/1000 of input, BNC connectors (output switchable for 3 modes DC, AC, RMS)                                                                                                                                                                                                       |
| Power source                                                                                                                          | Power terminal of the input units, or use with <b>AC ADAPTER 9418-15</b> (DC 12V)                                                                                                                                                                                                                     |

**Cable length and mass:** Main unit cable 1.5 m (4.92 ft), input section cable 1 m (3.28 ft), approx. 320 g (11.3 oz) **Note:** The unit-side plug of the 9321-01 is different from the 9321.

| LOGIC PROBE 9321-01 (Accuracy at 23 ±5°C/73 ±9°F, 35 to 80% rh; accuracy guaranteed for 1 year) |                                                                                                                                                               |
|-------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Function                                                                                        | Detection of AC or DC relay drive signal for High/Low state recording<br>Can also be used for power line interruption detection                               |
| Input                                                                                           | 4 channels (isolated between unit and channels), HIGH/LOW range switching<br><b>Input impedance:</b> 100kΩ or higher (HIGH range), 30kΩ or higher (LOW range) |
| Output (H) detection                                                                            | 170 to 250V AC, ±DC (70 to 250V) (HIGH range)                                                                                                                 |
| Output (L) detection                                                                            | 60 to 150V AC, ±DC (20 to 150V) (LOW range)                                                                                                                   |
| Output (L) detection                                                                            | 0 to 30V AC, ±DC (0 to 43V) (HIGH range)<br>0 to 10V AC, ±DC (0 to 15V) (LOW range)                                                                           |
| Response time                                                                                   | Rising edge 1ms max., falling edge 3ms max. (with HIGH range at 200V DC, LOW range at 100V DC)                                                                |
| Maximum allowable input voltage                                                                 | 250Vrms (HIGH range), 150Vrms (LOW range) (the maximum voltage that can be applied across input pins without damage)                                          |


## WAVE PROCESSOR 9335

|                       |                                                                                                                                                                                                                                                               |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Distribution media    | One CD-R                                                                                                                                                                                                                                                      |
| Operating environment | Computer equipped with Pentium (133 MHz) or better CPU and at least 32 MB of memory, and running under Windows 95/98/Me, Windows NT 4.0/2000/XP, or Windows Vista 32-bit type (recommended system: Pentium (200 MHz) or better with at least 64 MB of memory) |
| Display functions     | Waveform display/X-Y display/digital value display/cursor function/scroll function/maximum number of channels (32 channels analog, 32 channels logic)/gauge display (time, voltage axes)/graphical display                                                    |
| File loading          | Readable data formats (MEM, REC, RMS, .POW)<br>Maximum loadable file size: Maximum file size that can be saved by a given device (file size may be limited depending on the computer configuration)                                                           |
| Data conversion       | Conversion to CSV format, tab delimited, space delimited/data culling (simple)/convert for specified channel/batch conversion of multiple files                                                                                                               |
| Print functions       | Print formatting (1 up, 2-to-16 up, 2-to-16 rows, X-Y 1-to-4 up) /preview/ hard copy functions usable on any printer supported by operating system                                                                                                            |
| Other                 | Parameter calculation/search/clipboard copy/launching of other applications                                                                                                                                                                                   |

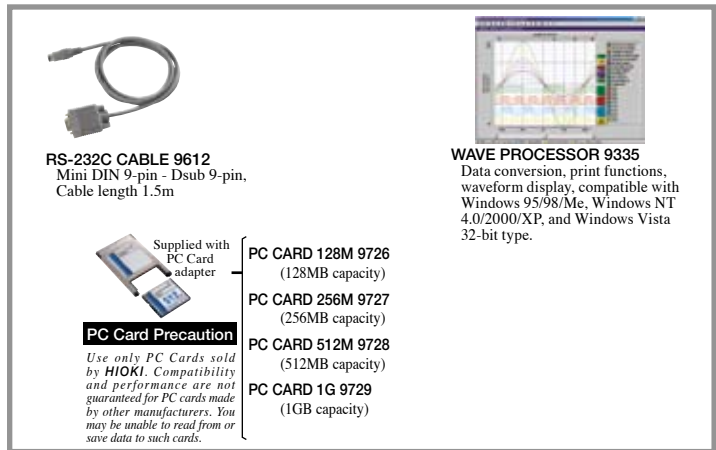
**MEMORY HiCORDER 8807-01** (2ch model)

**MEMORY HiCORDER 8808-01** (4ch model)

**Included accessories:** LR6/AA Alkaline batteries x6, Alkaline battery box x1, Shoulder belt x1, Application disk x1

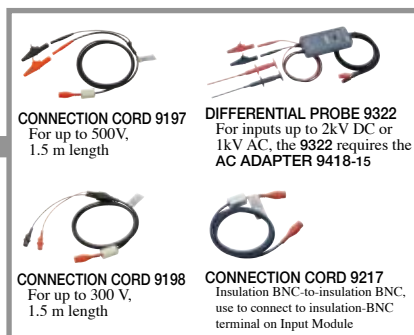**Current Measurement**


\* An input cord for measurement use is not provided. Please purchase the optional CONNECTION CORD 9197 or 9198 together with the recorder.



\* The units can be operated using the supplied LR6/AA alkaline batteries but use of the optional AC ADAPTER 9418-15 or BATTERY PACK 9447 (the AC ADAPTER 9418-15 is necessary for recharging) is recommended. Manganese batteries cannot be used. Use of commercially available rechargeable batteries instead of the original battery pack may result in damage to the unit.

**■ Combination example: 2-channels, with printer**

|                         | Main unit | Printer | Paper             | AC Adapter | Battery pack | Input cord |
|-------------------------|-----------|---------|-------------------|------------|--------------|------------|
| Model number x quantity | 8807-01x1 | 8992x1  | 9234x1 (10 rolls) | 9418-15x1  | 9447x1       | 9198x2     |

**■ Combination example: 4-channels, with printer**

|                         | Main unit | Printer | Paper             | AC Adapter | Battery pack | Input cord |
|-------------------------|-----------|---------|-------------------|------------|--------------|------------|
| Model number x quantity | 8808-01x1 | 8992x1  | 9234x1 (10 rolls) | 9418-15x1  | 9447x1       | 9198x4     |

**HIOKI**  
HIOKI E. E. CORPORATION

**HEAD OFFICE :**  
81 Koizumi, Ueda, Nagano, 386-1192, Japan  
TEL +81-268-28-0562 / FAX +81-268-28-0568  
E-mail: os-com@hioki.co.jp

**HIOKI USA CORPORATION :**  
6 Corporate Drive, Cranbury, NJ 08512 USA  
TEL +1-609-409-9109 / FAX +1-609-409-9108  
E-mail: hioki@hiokiusa.com

**HIOKI (Shanghai) Sales & Trading Co., Ltd. :**  
1904 Shanghai Times Square Office, 93 Huai Hai Zhong Road  
Shanghai, P.R.China POSTCODE: 200021  
TEL +86-21-6391-0090/0092 FAX +86-21-6391-0360  
E-mail: info-sh@hioki.cn

**Beijing Office :**  
A-2602 Freetown, 58 Dong San Huan Nan Road  
Beijing, P.R.China POSTCODE: 100022  
TEL +86-10-5867-4080/4081 FAX +86-10-5867-4090  
E-mail: info-bj@hioki.cn

**Guangzhou Office :**  
Room 303, Profit Plaza, No.76, West Huangpu Road  
Guangzhou, P.R.China POSTCODE: 510623  
TEL +86-20-38392673/2676 FAX +86-20-38392679  
E-mail: info-gz@hioki.cn

DISTRIBUTED BY





## О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

**Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.**

### Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (XC), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

## Перечень производителей, продукцию которых мы поставляем на российский рынок





Trade Electronics.ru

гарантия бесперебойности производства и  
качества выпускаемой продукции

С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

<http://www.tradeelectronics.ru/>