


DESCRIPTION

The popular 1N5221 thru 1N5281B series of 0.5 watt Zener Voltage Regulators provides a selection from 2.4 to 200 volts in standard 5% or 10% tolerances as well as tighter tolerances identified by different suffix letters on the part number. These glass axial-leaded DO-35 Zeners are also available in various military screening levels by adding a prefix identifier as described in the Features section. Microsemi also offers numerous other Zener products to meet higher and lower power applications.

IMPORTANT: For the most current data, consult MICROSEMI's website: <http://www.microsemi.com>

APPEARANCE
**DO-35
(DO-204AH)**

FEATURES

- JEDEC registered 1N5221 to 1N5281B
- Internal bonds optionally available with "-1" suffix
- Options for screening in accordance with MIL-PRF-19500 for JAN, JANTX, JANTXV, and JANS are available by adding MQ, MX, MV, or MSP prefixes respectively to part numbers with "-1" suffix.
- Surface mount equivalents available as MLL5221 to MLL5281B in the DO-213AA MELF style package including "-1" suffix options (consult factory for others)
- RoHS Compliant devices available by adding "e3" suffix
- DO-7 glass body axial-leaded Zener equivalents are also available

APPLICATIONS / BENEFITS

- Regulates voltage over a broad operating current and temperature range
- Extensive selection from 2.4 to 200 V
- Standard voltage tolerances are plus/minus 5% with B suffix, 10 % with A suffix identification
- Tight tolerances available in plus or minus 2% or 1% with C or D suffix respectively
- Flexible axial-lead mounting terminals
- Nonsensitive to ESD (MIL-STD-750 Method 1020)
- Minimal capacitance (see Figure 2)
- Inherently radiation hard per MicroNote 050

MAXIMUM RATINGS

- Power dissipation at 25°C: 0.5 watts (also see derating in Figure 1).
- Operating and Storage temperature: -65°C to +175°C
- Thermal Resistance: 250 °C/W junction to lead at 3/8 (10 mm) lead length from body, or 310 °C/W junction to ambient when mounted on FR4 PC board (1 oz Cu) with 4 mm² copper pads and track width 1 mm, length 25 mm
- Steady-State Power: 0.5 watts at $T_L \leq 50^\circ\text{C}$ 3/8 inch (10 mm) from body or 0.48 W at $T_A \leq 25^\circ\text{C}$ when mounted on FR4 PC board as described for thermal resistance above (also see Figure1)
- Forward voltage @200 mA: 1.5 volts (maximum)
- Solder Temperatures: 260 °C for 10 s (max)

MECHANICAL AND PACKAGING

- CASE: Hermetically sealed axial-lead glass DO-35 (DO-204AH) package
 - FINISH: Tin-Lead or RoHS Compliant annealed matte-Tin plating solderable per MIL-STD-750, method 2026
 - POLARITY: Cathode indicated by band. Diode to be operated with the banded end positive with respect to the opposite end for Zener regulation
 - MARKING: Part number
 - TAPE & REEL option: Standard per EIA-296 (add "TR" suffix to part number)
 - WEIGHT: 0.2 grams
- See package dimensions on last page

ELECTRICAL CHARACTERISTICS @ 25°C

JEDEC Type No. Note 1	Nominal Zener Voltage V _Z @ I _{ZT} Volts	Test Current I _{ZT} mA	Max Zener Impedance A & B Suffix Only Note 2		Max Reverse Current			Max Zener Voltage Temp. Coeff. (A & B Suffix Only) α _{VZ} (% / °C) Note 3	
					A, B, C & D Suffix Only		Non-Suffix		
			Z _{ZT} @ I _{ZK} Ohms	Z _{ZK} @ I _{ZK} = 0.25 mA Ohms	I _R μA	@ V _R Volts	I _R @ V _R Used For Suffix A μA		
						A	B,C & D		
1N5221	2.4	20	30	1200	100	0.95	1.0	200	-0.085
1N5222	2.5	20	30	1250	100	0.95	1.0	200	-0.085
1N5223	2.7	20	30	1300	75	0.95	1.0	150	-0.080
1N5224	2.8	20	30	1400	75	0.95	1.0	150	-0.080
1N5225	3.0	20	29	1600	50	0.95	1.0	100	-0.075
1N5226	3.3	20	28	1600	25	0.95	1.0	100	-0.070
1N5227	3.6	20	24	1700	15	0.95	1.0	100	-0.065
1N5228	3.9	20	23	1900	10	0.95	1.0	75	-0.060
1N5229	4.3	20	22	2000	5.0	0.95	1.0	50	+/-0.055
1N5230	4.7	20	19	1900	50	1.9	2.0	50	+/-0.030

JEDEC Type No. Note 1	Nominal Zener Voltage V_Z @ I_{ZT} Volts	Test Current I_{ZT} mA	Max Zener Impedance A & B Suffix Only Note 2		Max Reverse Current			Max Zener Voltage Temp. Coeff. (A & B Suffix Only) α_{VZ} (%/°C) Note 3
					A, B, C & D Suffix Only		Non-Suffix	
			Z_{ZT} @ I_{ZK} Ohms	Z_{ZK} @ $I_{ZK} = 0.25$ mA Ohms	I_R μA	@ V_R Volts	I_R @ V_R Used For Suffix A μA	
						A	B, C & D	
1N5231	5.1	20	17	1600	5.0	1.9	2.0	+/-0.030
1N5232	5.6	20	11	1600	5.0	2.9	3.0	+0.038
1N5233	6.0	20	7.0	1600	5.0	3.3	3.5	+0.038
1N5234	6.2	20	7.0	1000	5.0	3.8	4.0	+0.045
1N5235	6.8	20	5.0	750	3.0	4.8	5.0	+0.050
1N5236	7.5	20	6.0	500	3.0	5.7	6.0	+0.058
1N5237	8.2	20	8.0	500	3.0	6.2	6.5	+0.062
1N5238	8.7	20	8.0	600	3.0	6.2	6.5	+0.065
1N5239	9.1	20	10	600	3.0	6.7	7.0	+0.068
1N5240	10	20	17	600	3.0	7.6	8.0	+0.075
1N5241	11	20	22	600	2.0	8.0	8.4	+0.076
1N5242	12	20	30	600	1.0	8.7	9.1	+0.077
1N5243	13	9.5	13	600	0.5	9.4	9.9	+0.079
1N5244	14	9.0	15	600	0.1	9.5	10	+0.082
1N5245	15	8.5	16	600	0.1	10.5	11	+0.082
1N5246	16	7.8	17	600	0.1	11.4	12	+0.083
1N5247	17	7.4	19	600	0.1	12.4	13	+0.084
1N5248	18	7.0	21	600	0.1	13.3	14	+0.085
1N5249	19	6.6	23	600	0.1	13.3	14	+0.086
1N5250	20	6.2	25	600	0.1	14.3	15	+0.086
1N5251	22	5.6	29	600	0.1	16.2	17	+0.087
1N5252	24	5.2	33	600	0.1	17.1	18	+0.088
1N5253	25	5.0	35	600	0.1	18.1	19	+0.089
1N5254	27	4.6	41	600	0.1	20	21	+0.090
1N5255	28	4.5	44	600	0.1	20	21	+0.091
1N5256	30	4.2	49	600	0.1	22	23	+0.091
1N5257	33	3.8	58	700	0.1	24	25	+0.092
1N5258	36	3.4	70	700	0.1	26	27	+0.093
1N5259	39	3.2	80	800	0.1	29	30	+0.094
1N5260	43	3.0	93	900	0.1	31	33	+0.095
1N5261	47	2.7	105	1000	0.1	34	36	+0.095
1N5262	51	2.5	125	1100	0.1	37	39	+0.096
1N5263	56	2.2	150	1300	0.1	41	43	+0.096
1N5264	60	2.1	170	1400	0.1	44	46	+0.097
1N5265	62	2.0	185	1400	0.1	45	47	+0.097
1N5266	68	1.8	230	1600	0.1	49	52	+0.097
1N5267	75	1.7	270	1700	0.1	53	56	+0.098
1N5268	82	1.5	330	2000	0.1	59	62	+0.098
1N5269	87	1.4	370	2200	0.1	65	68	+0.099
1N5270	91	1.4	400	2300	0.1	66	69	+0.099
1N5271	100	1.3	500	2600	0.1	72	76	+0.110
1N5272	110	1.1	750	3000	0.1	80	84	+0.110
1N5273	120	1.0	900	4000	0.1	86	91	+0.110
1N5274	130	0.95	1100	4500	0.1	94	99	+0.110
1N5275	140	0.90	1300	4500	0.1	101	106	+0.110
1N5276	150	0.85	1500	5000	0.1	108	114	+0.110
1N5277	160	0.80	1700	5500	0.1	116	122	+0.110
1N5278	170	0.74	1900	5500	0.1	123	129	+0.110
1N5279	180	0.68	2200	6000	0.1	130	137	+0.110
1N5280	190	0.66	2400	6500	0.1	137	144	+0.110
1N5281	200	0.65	2500	7000	0.1	144	152	+0.110

*JEDEC registered data. JEDEC type numbers listed indicate a tolerance of +/-20% with guaranteed limits on only V_Z , I_R , and V_F . Devices with guaranteed limits on all six parameters are indicated by suffix A for +/-10% tolerance and suffix B for +/-5% tolerance. Also available with suffix C or D which indicates 2% and 1% tolerance respectively.

NOTES:

- The electrical characteristics are measured after allowing the device to stabilize for 20 seconds when mounted with a 3/8" (10 mm) minimum lead length from the case.
- The zener impedance is derived from the 60 Hz ac voltage that results when an ac current having an rms value equal to 10% of the dc zener current (I_{ZT} or I_{ZK}) is superimposed on I_{ZT} or I_{ZK} . Zener impedance is measured at two points to ensure a sharp knee on the breakdown curve, thereby eliminating unstable units. Also see MicroNote 202 for variation in dynamic impedance with different operating currents.
- Temperature coefficient (α_{VZ}). Test conditions for temperature coefficient are as follows:
 - $I_{ZT} = 7.5$ mA, $T_1 = 25^\circ\text{C}$, $T_2 = 125^\circ\text{C}$ (1N5221A, B thru 1N5242A, B).
 - $I_{ZT} = \text{Rated } I_{ZT}$, $T_1 = 25^\circ\text{C}$, $T_2 = 125^\circ\text{C}$ (1N5243A, B thru 1N5281A, B).
 (Device to be temperature stabilized with current applied prior to reading breakdown voltage at the specified ambient temp.)

GRAPHS

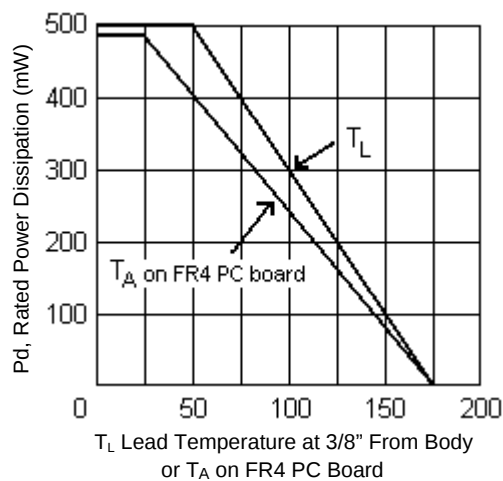


FIGURE 1
POWER DERATING CURVE


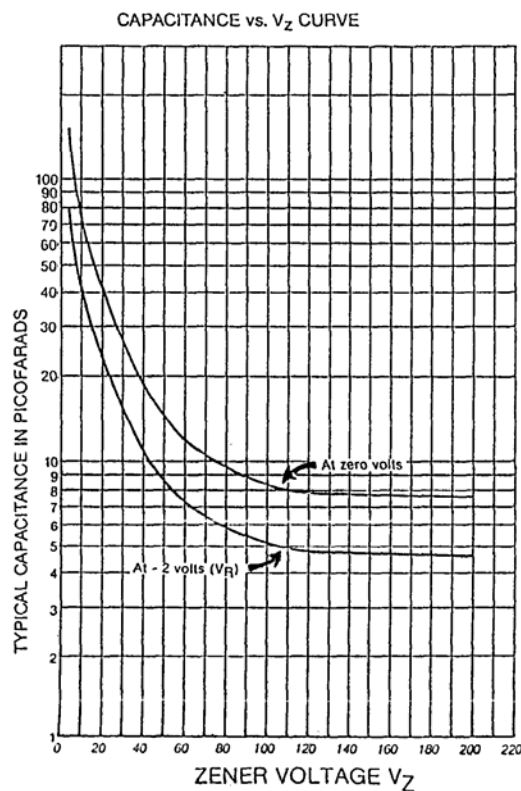


FIGURE 2
CAPACITANCE vs. ZENER VOLTAGE
(TYPICAL)

PACKAGE DIMENSIONS



All dimensions in INCH
mm

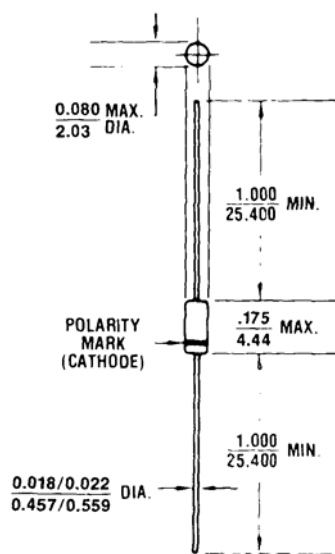

О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.

Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (XC), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

Перечень производителей, продукцию которых мы поставляем на российский рынок





Trade Electronics.ru

гарантия бесперебойности производства и
качества выпускаемой продукции

С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

<http://www.tradeelectronics.ru/>