


THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC. U.S.A. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT INC. OR ITS AFFILIATED SUBSIDIARIES.

DWG. NO.	ZONE	REV.	DESCRIPTION	DATE	APPROV.
X10-0X3		F	ECN 387	06/09/95	C

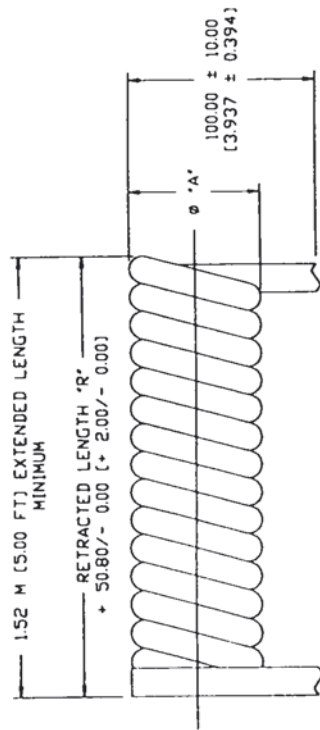

BUNDLE SPECIFICATION

NOTES: UNLESS OTHERWISE SPECIFIED.



- 1.0 PACKAGING SPECIFICATION
 - 1.01 USE CLEAR TAPE TO BUNDLE 25 CABLES TOGETHER AT THE MID SECTION.
 - 1.02 PLACE PLASTIC BAG IN SHIPPING BOX AND LAY 10 BUNDLE OR 250 PIECES MAX. PER SHIPPING BOX. CLOSE PLASTIC BAG AND SEAL BOX ALONG 3 SURFACES WITH TAPE.

4	431.80	(17.000)	L=13.00" X W=20.00" X H=9.0
5	457.20	(18.000)	L=13.00" X W=20.00" X H=9.0
6	558.80	(22.000)	L=13.00" X W=25.00" X H=9.0
CONDUCTORS NUMBER OF	MILLIMETERS	INCHES	DIMENSION MAX.
	RETRACTED LENGTH 'R'		OUTSIDE SHIPPING BOX
TABULATION BLOCK			
THIRD ANGLE PROJECTION		I/O INTERCONNECT	
		SANTA ANA, CALIFORNIA	
UNLESS OTHERWISE NOTED: 1) DIMENSIONS ARE IN MILLIMETER (INCHES) 2) TOLERANCES: XX ± 0.20 (0.008) XXX ± 0.35 (0.250)		DR: GETH WYNN E: 06/09/95 TITLE: 26 AWG (12/0.12 mm) BARE COPP 500 FT. EXTENDED, NON-UL, UNSHIELDED, MODULAR CABLE	
CHKD: [Signature]		PART NO: 121-X10-0X3	
CHKD: [Signature]		CUSTOMER: I/O INTERCONNECT	
CHKD: [Signature]		SCALE: NONE	
		SHEET 2 OF 2	

A B C D E F G H

THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT, INC. U.S.A. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT, INC. OR ITS AFFILIATED SUBSIDIARIES.

DWG. NO.	ZONE	REV.	DESCRIPTION	DATE	APPROV.
X10-0X2		I	ECN 387	06/09/95	CT

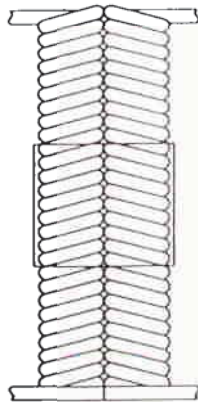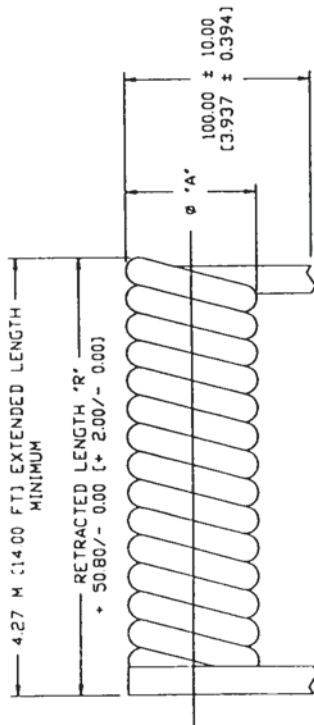

BUNDLE SPECIFICATION

NOTES: UNLESS OTHERWISE SPECIFIED.

1.0 PACKAGING SPECIFICATION

- 1.01 USE CLEAR TAPE TO BUNDLE 25 CABLES TOGETHER AT THE MID SECTION.
- 1.02 PLACE PLASTIC BAG IN SHIPPING BOX AND LAY 10 BUNDLE OR 250 PIECES MAX. PER SHIPPING BOX. CLOSE PLASTIC BAG AND SEAL BOX ALONG 3 SURFACES WITH TAPE.

4	863.60	[34.000]	L=13.00' X W=40.00' X H=9.00
6	1117.60	[44.000]	L=13.00' X W=50.00' X H=9.00
8	1270.00	[50.000]	L=13.00' X W=55.00' X H=9.00
CONDUCTORS	MILLIMETERS	INCHES	DIMENSION MAX
NUMBER OF	RETRACTED LENGTH 'R'		OUTSIDE SHIPPING BOX


TABULATION BLOCK

THIRD ANGLE PROJECTION			I/O INTERCONNECT
UNLESS OTHERWISE NOTED: 1) DIMENSIONS ARE IN MILLIMETER (INCHES) 2) TOLERANCES: XX ± 0.20 (0.008) XXX ± 0.35 (0.250)		SANTA ANA, CALIFORNIA	
DR: C. WANG		TITLE: 86 AWG (12/012 MM) BARE COPPER 14.00 FT EXTENDED, NON-UL, UNSHIELDED, MODULAR CABLE	
C. WANG		06/09/95	
CHKD: [Signature]		PART NO: 121-X10-0X2	
CHKD: [Signature]		CUSTOMER: I/O INTERCONNECT	
CHKD: [Signature]		SCALE: NONE	
CHKD: [Signature]		SHEET: 2 OF 2	

6/10/95

THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT, INC. USA AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT, INC. OR ITS AFFILIATED SUBSIDIARIES.

DWG. NO.	ZONE / REV.	DESCRIPTION	DATE	APPROV.
X10-0X0	D	ECN 387	06/09/95	G.T.

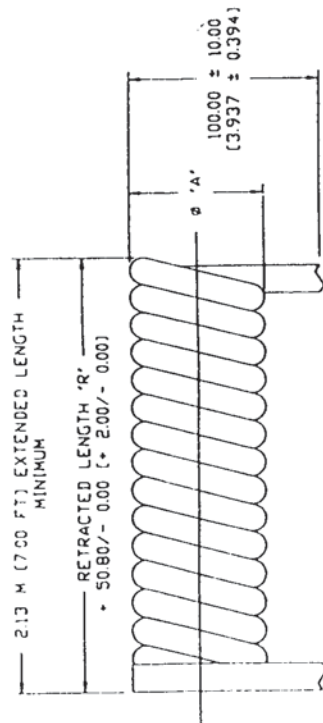

BUNDLE SPECIFICATION



NOTES UNLESS OTHERWISE SPECIFIED.

1.0 PACKAGING SPECIFICATION

1.01 USE CLEAR TAPE TO BUNDLE 25 CABLES TOGETHER AT THE MID SECTION.

1.02 PLACE PLASTIC BAG IN SHIPPING BOX AND LAY

10 BUNDLE OR 250 PIECES MAX. PER SHIPPING BOX.

CLOSE PLASTIC BAG AND SEAL BAG ALONG 3 SURFACES

WITH TAPE

4	533.40	(21.000)	L=13.00" X W=25.00" X H=9.00"
6	609.60	(24.000)	L=13.00" X W=25.00" X H=9.00"
8	711.20	(28.000)	L=13.00" X W=30.00" X H=9.00"
CONDUCTORS	MILLIMETERS	INCHES	DIMENSION MAX.
NUMBER OF	RETRACTED LENGTH "R"		OUTSIDE SHIPPING BOX

TABULATION BLOCK

I/O INTERCONNECT 26 AVG (12/0.12 mm) BARE COPPER 7.00 FT. EXTENDED, NON-UL UNSHIELDED, MODULAR CABLE	
DR: CAVI C. VAG CHKD: <i>Valley</i>	TITLE: SANTA ANA, CALIFORNIA DATE: 06/09/95 PART NO: 121-X10-0X0 CUSTOMER: I/O INTERCONNECT SCALE: NONE SHEET: 2 OF 2

THIRD ANGLE PROJECTION



UNLESS OTHERWISE NOTED:


1) DIMENSIONS ARE IN MILLIMETER (INCHES)

2) TOLERANCES:


XX ± 0.20 (0.008)

X.XX ± 6.35 (0.250)


THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT, INC. I/O INTERCONNECT, INC. SHALL NOT BE RESPONSIBLE FOR ANY ERRORS OR OMISSIONS. I/O INTERCONNECT, INC. OR ITS AFFILIATED SUBSIDIARIES SHALL BE RESPONSIBLE FOR ANY ERRORS OR OMISSIONS.

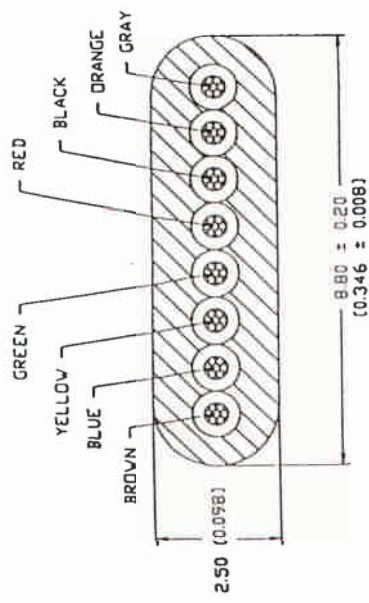

8 CONDUCTOR CABLE

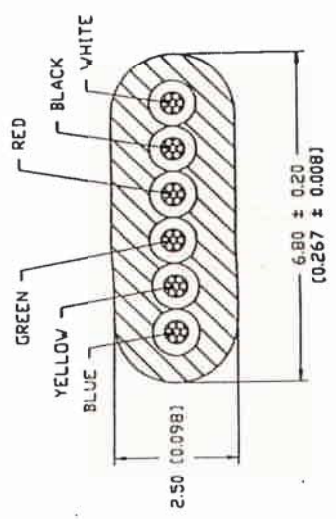

6 CONDUCTOR CABLE

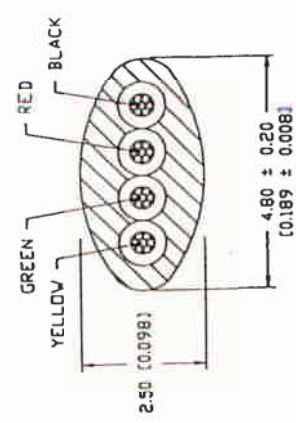

4 CONDUCTOR CABLE


NOTES: UNLESS OTHERWISE SPECIFIED:

- 1.0 MATERIAL AND SPECIFICATIONS
 - 1.01 CONDUCTORS: 26 AWG (12/0.12 mm) STRANDED BARE COPPER
 - 1.02 INSULATION: POLYPROPYLENE
 - 1.03 COLOR: PER CALLOUT
 - 1.04 PACKAGING: (SEE PAGE 2)
- 2.0 ELECTRICAL CHARACTERISTICS
 - 2.01 TEMPERATURE & VOLTAGE RATING: 80°C 30 V
 - 2.02 CONDUCTORS RESISTANCE: 148 OHMS/KM MAX. AT 20°C
 - 2.03 INSULATION RESISTANCE: 100 MEGOHMS/KM MIN. AT 20°C
 - 2.04 CAPACITANCE: 15 PF/FT (MAX)
 - 2.05 DIELECTRIC TEST: AC-500V PER 1 MINUTE


121-410-000	4	SILVER SATIN	[0.551 ± 0.039] [4.00 ± 1.00]
121-410-010	4	BLACK	[0.551 ± 0.039] [4.00 ± 1.00]
121-410-020	4	WHITE	[0.551 ± 0.039] [4.00 ± 1.00]
121-610-000	6	SILVER SATIN	[0.551 ± 0.039] [4.00 ± 1.00]
121-610-010	6	BLACK	[0.551 ± 0.039] [4.00 ± 1.00]
121-610-020	6	WHITE	[0.551 ± 0.039] [4.00 ± 1.00]
121-810-000	8	SILVER SATIN	[0.748 ± 0.039] [19.00 ± 1.00]
121-810-010	8	BLACK	[0.748 ± 0.039] [19.00 ± 1.00]
121-810-020	8	WHITE	[0.748 ± 0.039] [19.00 ± 1.00]
I/O INTERCONNECT PART NUMBER	NUMBER OF CONDUCTORS	COLOR	ø "A"

		I/O INTERCONNECT SANTA ANA, CALIFORNIA	
UNLESS OTHERWISE NOTED: 1) DIMENSIONS ARE IN MILLIMETER (INCHES) 2) TOLERANCES: X.X ± 0.20 (0.008) X.XX ± 6.35 (0.250)		TITLE: 26 AWG (12/0.12 mm) BARE COPPER 7.00 FT EXTENDED, NON-UL UNSHIELDED, MODULAR CABLE PART NO: 121-X10-0X0 CUSTOMER: I/O INTERCONNECT SCALE: NONE SHEET 1 OF 1	


John Miller

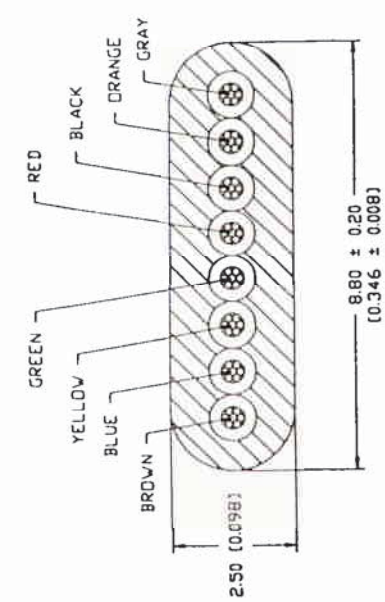

8 CONDUCTOR CABLE

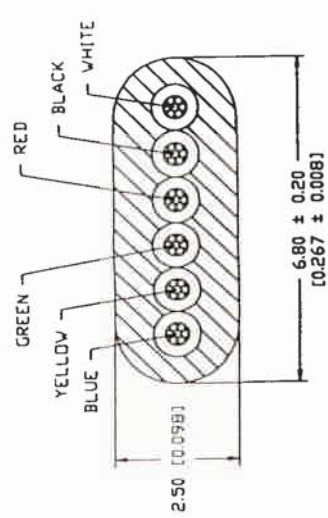

6 CONDUCTOR CABLE

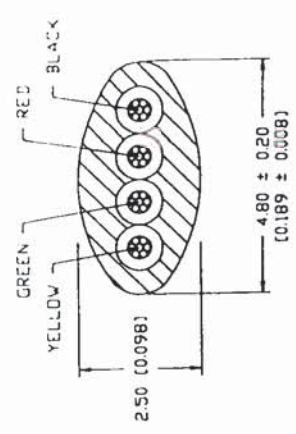

4 CONDUCTOR CABLE

NOTES: UNLESS OTHERWISE SPECIFIED.

- 1.0 MATERIAL AND SPECIFICATIONS
 - 1.01 CONDUCTORS: 26 AWG (12/012 mm) STRANDED BARE COPPER.
 - 1.02 INSULATION: POLYPROPYLENE
 - 1.03 COLOR: PER CALLOUT
 - 1.04 PACKAGING: (SEE PAGE 2)
- 2.0 ELECTRICAL CHARACTERISTICS
 - 2.01 TEMPERATURE & VOLTAGE RATING: 80°C 30 V
 - 2.02 CONDUCTORS RESISTANCE: 148 OHMS/KM MAX. AT 20°C
 - 2.03 INSULATION RESISTANCE: 100 MEGOHMS/KM MIN. AT 20°C
 - 2.04 CAPACITANCE: 15 PF/FT (MAX)
 - 2.05 DIELECTRIC TEST: AC-500V PER 1 MINUTE

121-410-003	4	SILVER SATIN	[0.55] ± 0.0	14.00 ± 1.0
121-410-013	4	BLACK	[0.55] ± 0.0	14.00 ± 1.0
121-410-023	4	WHITE	[0.55] ± 0.0	14.00 ± 1.0
121-610-003	6	SILVER SATIN	[0.55] ± 0.0	14.00 ± 1.0
121-610-013	6	BLACK	[0.55] ± 0.0	14.00 ± 1.0
121-610-023	6	WHITE	[0.55] ± 0.0	14.00 ± 1.0
121-810-003	8	SILVER SATIN	[0.748 ± 0.0	19.00 ± 1.0
121-810-013	8	BLACK	[0.748 ± 0.0	19.00 ± 1.0
121-810-023	8	WHITE	[0.748 ± 0.0	19.00 ± 1.0
1/0 INTERCONNECT PART NUMBER	NUMBER OF CONDUCTORS	COLOR	Ø "A"	

THIRD ANGLE PROJECTION

UNLESS OTHERWISE NOTED:
1) DIMENSIONS ARE IN MILLIMETER (INCHES)
2) TOLERANCES:
XX ± 0.20 (0.008)
XXX ± 6.35 (0.250)

I/O INTERCONNECT
SANTA ANA, CALIFORNIA

DR: CATH WONG TITLE: 26 AWG (12/012 mm) BARE COPPER
C. WONG 06/09/95 500 FT EXTENDED, NON-UL, UNSHIELDED, MODULAR CABLE

CHKD: *Karl Berg* PART NO: 121-X10-0X3
CHKD: *[Signature]* CUSTOMER: I/O INTERCONNECT
CHKD: *[Signature]* SCALE: NONE SHEET 1 OF 1


DATE	REV.	DESCRIPTION	DATE	APPROVED
010-013	G	CON BCS	07/15/78	RJ

DATE	REV.	DESCRIPTION	DATE	APPROVED
010-013	G	CON BCS	07/15/78	RJ

DATE	REV.	DESCRIPTION	DATE	APPROVED
010-013	G	CON BCS	07/15/78	RJ

DATE	REV.	DESCRIPTION	DATE	APPROVED
010-013	G	CON BCS	07/15/78	RJ

THESE DIMENSIONS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC. NO PART OF THIS DOCUMENT MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT THE WRITTEN PERMISSION OF I/O INTERCONNECT INC. OR ITS APPLICABLE SUBSIDIARIES.

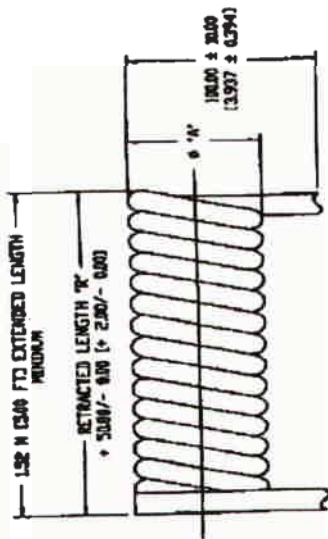

BUNDLE SPECIFICATION

NOTES: UNLESS OTHERWISE SPECIFIED

- 1.0 MATERIAL AND SPECIFICATIONS
- 1.1 CONDUCTORS: 26 AWG (0.412 mm) STANNED BARE COPPER
- 1.2 INSULATION: POLYPROPYLENE
- 1.3 COLOR: PER CALLOUT
- 1.4 PACKAGING: SEE PAGE 2
- 2.0 ELECTRICAL CHARACTERISTICS
- 2.1 TEMPERATURE & VOLTAGE RATING: 80°C 30 V
- 2.2 CONDUCTORS RESISTANCE: 140 OHMS/KM MAX AT 20°C
- 2.3 INSULATION RESISTANCE: 100 MEGOHMS/KM MIN AT 20°C
- 2.4 CAPACITANCE: 15 PF/FT (500)
- 2.5 DIELECTRIC TEST: AC-500V PER 1 MINUTE
- 3.0 PACKAGING SPECIFICATION
- 3.1 USE CLEAR TAPE TO BUNDLE 25 CABLES TOGETHER AT THE MID SECTION
- 3.2 PLACE PLASTIC BAG IN SHIPPING BOX AND LAY TO BUNDLE OR 250 PILES MAX PER SHIPPING BOX. CLOSE PLASTIC BAG AND SEAL BOX ALONG 3 SURFACES WITH TAPE

CONDUCTORS NUMBER OF	MILLIMETERS	RETRACTED LENGTH "IN"	INCHES
4	431.00	(17.000)	L=13.00" X V=28.00" X H=9.00"
6	457.20	(18.000)	L=13.00" X V=28.00" X H=9.00"
8	508.00	(20.000)	L=13.00" X V=28.00" X H=9.00"
10	609.60	(24.000)	L=13.00" X V=28.00" X H=9.00"
CONDUCTORS NUMBER OF	MILLIMETERS	RETRACTED LENGTH "IN"	INCHES
CONDUCTORS NUMBER OF	MILLIMETERS	RETRACTED LENGTH "IN"	INCHES

THIRD ANGLE PROJECTION	ISO INTERCONNECT
UNLESS OTHERWISE NOTED: 1) DIMENSIONS ARE IN MILLIMETERS (INCHES) 2) TOLERANCES: XX ± 0.20 (0.008) XXX ± 0.25 (0.010)	SANTA ANA, CALIFORNIA 26 AWG (0.412 mm) BARE COPPER 500 FT EXTENDED, NON-UL, UNSHIELDED, MODULAR CABLE PART NO: 12-100-000 DATE: 07/15/78 REV: 1/0 INTERCONNECT SHEET 2 OF 2



О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.

Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (XC), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

Перечень производителей, продукцию которых мы поставляем на российский рынок





Trade Electronics.ru

гарантия бесперебойности производства и
качества выпускаемой продукции

С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

<http://www.tradeelectronics.ru/>