

AMMC-5033

17.7 - 32 GHz Power Amplifier



Data Sheet



Chip Size: 2730 x 1300 μm (108 x 51.6 mils)
Chip Size Tolerance: $\pm 10 \mu\text{m}$ (± 0.4 mils)
Chip Thickness: 100 $\pm 10 \mu\text{m}$ (4 ± 0.4 mils)
Pad Dimensions: 80 x 80 μm (2.95 ± 0.4 mils)

Description

Avago's AMMC-5033 is a MMIC power amplifier designed for use in wireless transmitters that operate within 17.7 GHz to 32 GHz range. At 25 GHz, it provides 27 dBm of output power (P-1dB) and 20 dB of small-signal gain from a small easy-to-use device. The device has input and output matching circuitry for use in 50 Ω environments. The AMMC-5033 also integrates a temperature compensated RF power detection circuit that enables power detection of 0.1V/W at 22 GHz. For improved reliability and moisture protection, the die is passivated at the active areas.

AMMC-5033 Absolute Maximum Ratings^[1]

| Symbol | Parameters/Conditions | Units | Min. | Max. |
|------------------|-------------------------------------|--------------------|------|------|
| $V_{d1,2}$ | Positive Drain Voltage | V | | 7 |
| V_{g1}, V_{gg} | Gate Supply Voltage | V | -3 | 0.5 |
| Det Bias | Applied Detector Bias (Optional) | V | | 7 |
| I_{d1} | First Stage Drain Current | mA | | 320 |
| I_{d2} | Second Stage Drain Current | mA | | 640 |
| P_{in} | CW Input Power | dBm | | 23 |
| T_{ch} | Operating Channel Temp. | $^{\circ}\text{C}$ | | +150 |
| T_{stg} | Storage Case Temp. | $^{\circ}\text{C}$ | -65 | +150 |
| T_{max} | Maximum Assembly Temp. (60 sec max) | $^{\circ}\text{C}$ | | +300 |

Note:

1. Operation in excess of any one of these conditions may result in permanent damage to this device.

Features

- Wide frequency range: 17.7 – 32 GHz
- High power: P-1dB @ 25 GHz = 27 dBm
- High gain: 20 dB
- Return loss: Input: -13 dB, Output: -20 dB
- Integrated RF power detector

Applications

- Designed for use in transmitters that operate in various frequency bands between 17.7 GHz and 32 GHz.
- Can be driven by the AMMC-5040 (20-40 GHz) or the AMMC-5618 (6-20 GHz) MMIC amplifiers, increasing the power handling capability of transmitters requiring linear operation.

Note: These devices are ESD sensitive. The following precautions are strongly recommended: Ensure that an ESD approved carrier is used when dice are transported from one destination to another. Personal grounding is to be worn at all times when handling these devices.

AMMC-5033 DC Specifications/Physical Properties^[1]

| Symbol | Parameters and Test Conditions | Units | Min. | Typ. | Max. |
|-----------------------------|---|--------------------|-------|-----------------|------|
| I_{d1} | First Stage Drain Supply Current ($V_{d1} = 3.5\text{ V}$, $V_{g1} = \text{Open}$, V_{gg} set for I_{d2} Typical) | mA | | 280 | 320 |
| I_{d2} | Second Stage Drain Supply Current ($V_{d2} = 5\text{ V}$, $V_{g1} = \text{Open}$, V_{gg} set for I_{d2} Typical) | V | | 500 | |
| V _{gg} | Gate Supply Operating Voltage ($I_{d1(Q)} + I_{d2(Q)} = 780\text{ (mA)}$) | V | -0.95 | -0.6 | -0.4 |
| DETBias | Detector Bias Voltage (Optional) | V | | V _{d2} | |
| $\theta_{c1(\text{ch-bs})}$ | First Stage Thermal Resistance ^[2] (Backside Temperature, $T_b = 25^\circ\text{C}$) | $^\circ\text{C/W}$ | | 31 | |
| $\theta_{c2(\text{ch-bs})}$ | Second Stage Thermal Resistance ^[2, 3] (Backside Temperature, $T_b = 25^\circ\text{C}$) | $^\circ\text{C/W}$ | | 19 | |

Notes:

1. Backside temperature $T_b = 25^\circ\text{C}$ unless otherwise noted.
2. Channel-to-backside Thermal Resistance ($\theta_{\text{ch-b}}$) = 42°C/W at Tchannel (T_c) = 150°C as measured using infrared microscopy. Thermal Resistance at backside temperature (T_b) = 25°C calculated from measured data.

AMMC-5033 RF Specifications^[4, 5]

$T_b = 25^\circ\text{C}$, $V_{d1} = 3.5\text{ V}$, $V_{d2} = 5\text{ V}$, $I_{d1(Q)} = 280\text{ mA}$, $I_{d2(Q)} = 500\text{ mA}$, $Z_o = 50\ \Omega$

| Symbol | Parameters and Test Condition | Unit | Lower Band Specifications (17.7 - 21 GHz) | | | Mid Band Specifications (21 - 26.5 GHz) | | Upper Band Specifications (26.5 - 32 GHz) | | |
|--------------------------|---|------|--|------|------|--|------|--|------|------|
| | | | Min. | Typ. | Max. | Min. | Typ. | Max. | Min. | Typ. |
| Gain | Small-Signal Gain ^[5] | dB | 20 | 22 | | 17.5 | 20 | | 16.5 | 18.5 |
| $P_{-1\text{dB}}$ | Output Power at 1dB Gain Compression ^[6] | dB | 23.5 | 25 | | 25.5 | 27 | | 25 | 26.5 |
| $P_{-3\text{dB}}$ | Output Power at 3dB Gain Compression ^[6] | dB | | 27 | | | 28 | | | 27 |
| OIP_3 | Output Third Order Intercept Point ^[6] ; $\Delta f = 2\text{ MHz}$; Pin = +2 dBm | dBm | 27 | 29 | | 29 | 32 | | 29 | 32 |
| RL_{in} | Input Return Loss ^[5] | dB | 11.5 | 13.5 | | 11 | 13 | | 11 | 13 |
| RL_{out} | Output Return Loss ^[5] | dB | 14 | 20 | | 14 | 19 | | 15 | 22 |
| Isolation | Min. Reverse Isolation | dB | | 47 | | | 48 | | | 46 |

Notes:

4. Data measured in wafer form $T_b = 25^\circ\text{C}$.
5. 100% on-wafer RF test is done at frequency = 17.7, 21, 26.5 and 32 GHz.
6. 100% on-wafer test frequency = 17.7, 26.5 and 32 GHz.

AMMC-5033 Typical Performances

($T_b = 25^\circ\text{C}$, $V_{d1} = 3.5\text{ V}$, $I_{D1} = 280\text{ mA}$, $V_{d2} = 5\text{ V}$, $I_{D2} = 500\text{ mA}$, $Z_{in} = Z_{out} = 50\ \Omega$)

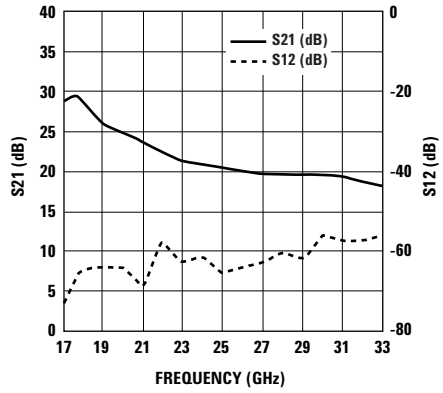


Figure 1. Gain and reverse isolation

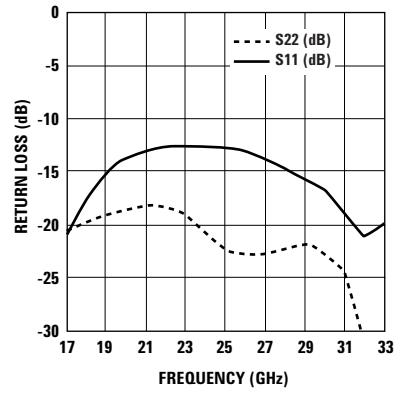


Figure 2. Return loss (input and output)

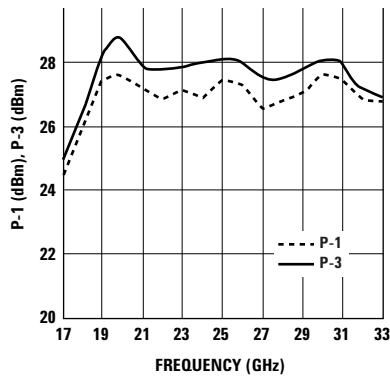


Figure 3. Output power at 1 dB and 3 dB gain compression

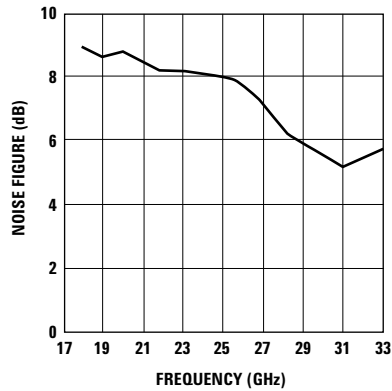


Figure 4. Noise figure

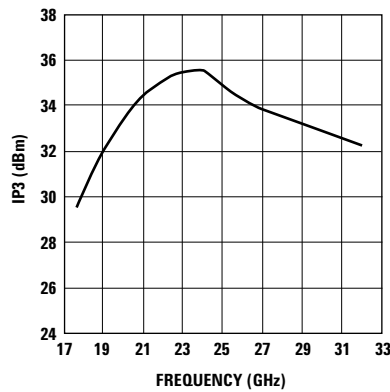


Figure 5. Output 3rd order intercept point

AMMC-5033 Typical Performance Curves (Over Temperature and Voltage)

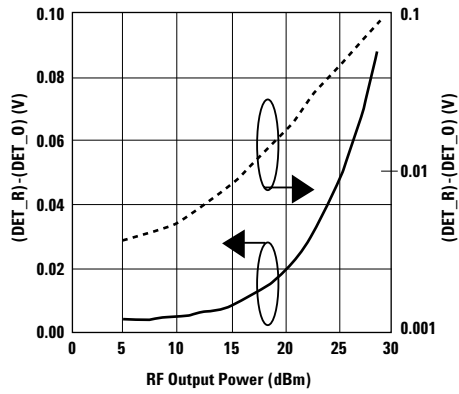


Figure 6. Linear and log detector voltage and output power, freq. = 22 GHz, Det_B = 5 V

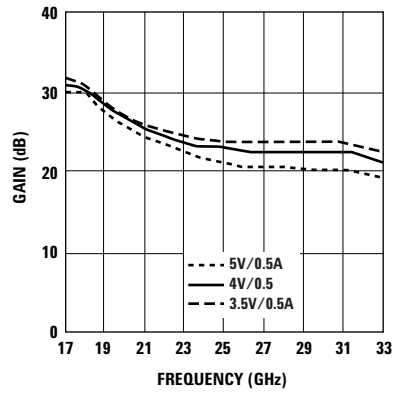


Figure 7. Gain and V_{d2} voltage, $V_{d1} = 3.5 V$ (constant)

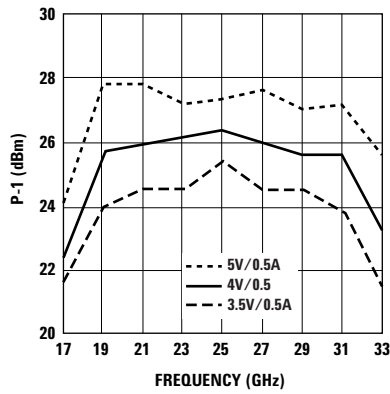


Figure 8. Output power at 1 dB gain compression and V_{d2} voltage, $V_{d1} = 3.5 V$ (constant)

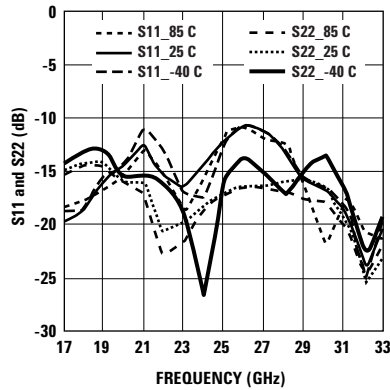


Figure 9. Return-loss with temperature

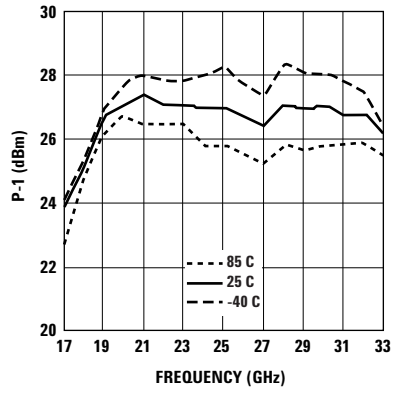


Figure 10. Output power at 1 dB gain compression and temperature

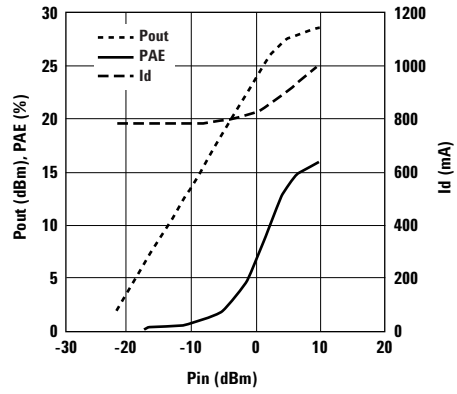


Figure 11. Output power, PAE, and total drain current vs. input power at 25 GHz

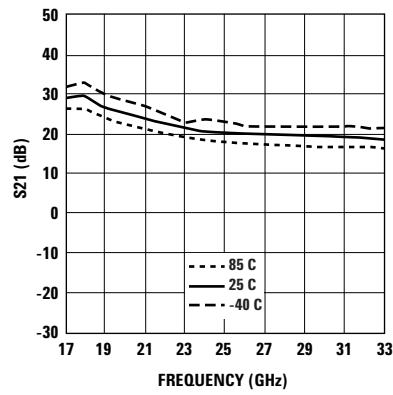


Figure 12. Gain with temperature

Typical Scattering Parameters^[1]

($T_b = 25^\circ\text{C}$, $V_{d1} = 3.5\text{ V}$, $I_{D1} = 280\text{ mA}$, $V_{d2} = 5\text{ V}$, $I_{D2} = 500\text{ mA}$, $Z_{in} = Z_{out} = 50\ \Omega$)

| Freq [GHz] | S11 | | | S21 | | | S12 | | | S22 | | |
|---------------|-------|------|-------|-------|-------|-------|--------|----------|-------|-------|------|-------|
| | dB | Mag | Phase | dB | Mag | Phase | dB | Mag | Phase | dB | Mag | Phase |
| 1 | -10.7 | 0.29 | 173 | -51.1 | 0.003 | -163 | -95.1 | 1.77E-05 | 128 | -0.5 | 0.95 | -26 |
| 2 | -11.0 | 0.28 | 167 | -70.1 | 0 | 79 | -83.1 | 6.97E-05 | 76 | -0.7 | 0.92 | -51 |
| 3 | -11.4 | 0.27 | 161 | -46.6 | 0.005 | -103 | -74.5 | 1.89E-04 | 81 | -1.2 | 0.87 | -76 |
| 4 | -12.1 | 0.25 | 153 | -37.3 | 0.014 | 72 | -74.5 | 1.88E-04 | 69 | -2.2 | 0.78 | -95 |
| 5 | -15.3 | 0.17 | 140 | -22.6 | 0.074 | -31 | -80.3 | 9.66E-05 | -47 | -2.4 | 0.76 | -112 |
| 6 | -12.2 | 0.25 | 149 | -20.4 | 0.096 | 144 | -80.1 | 9.90E-05 | -126 | -2.8 | 0.73 | -130 |
| 7 | -14.0 | 0.2 | 143 | -20.5 | 0.095 | 79 | -80.3 | 9.68E-05 | 94 | -4.0 | 0.63 | -146 |
| 8 | -15.3 | 0.17 | 139 | -25.4 | 0.053 | -3 | -74.1 | 1.97E-04 | 35 | -4.2 | 0.62 | -150 |
| 9 | -17.6 | 0.13 | 138 | -33.1 | 0.022 | 108 | -81.4 | 8.52E-05 | -62 | -3.5 | 0.67 | -166 |
| 10 | -19.4 | 0.11 | 145 | -18.9 | 0.113 | 54 | -81.4 | 8.56E-05 | -162 | -3.8 | 0.64 | 177 |
| 11 | -18.6 | 0.12 | 152 | -18.2 | 0.123 | -37 | -81.3 | 8.59E-05 | 151 | -4.4 | 0.6 | 161 |
| 12 | -19.7 | 0.1 | 141 | -29.0 | 0.035 | -77 | -74.6 | 1.86E-04 | 178 | -5.2 | 0.55 | 146 |
| 13 | -24.5 | 0.06 | 134 | -15.4 | 0.169 | 103 | -81.3 | 8.65E-05 | -180 | -6.3 | 0.48 | 131 |
| 14 | -27.4 | 0.04 | 159 | 0.9 | 1.107 | 61 | -81.2 | 8.70E-05 | -20 | -7.9 | 0.41 | 115 |
| 15 | -30.6 | 0.03 | -148 | 12.7 | 4.316 | -8 | -74.6 | 1.86E-04 | 152 | -10.1 | 0.31 | 100 |
| 16 | -24.1 | 0.06 | -121 | 22.6 | 13.52 | -87 | -76.2 | 1.55E-04 | 144 | -13.3 | 0.22 | 86 |
| 17 | -21.2 | 0.09 | -116 | 28.8 | 27.62 | 174 | -74.7 | 1.84E-04 | -164 | -20.5 | 0.09 | 76 |
| 18 | -18.0 | 0.13 | -116 | 28.7 | 27.25 | 73 | -64.8 | 5.75E-04 | 165 | -20.0 | 0.1 | 133 |
| 19 | -15.5 | 0.17 | -123 | 26.4 | 20.92 | 3 | -64.3 | 6.08E-04 | 123 | -19.4 | 0.11 | 130 |
| 20 | -14.0 | 0.2 | -133 | 24.7 | 17.18 | -53 | -64.4 | 6.03E-04 | 90 | -19.1 | 0.11 | 135 |
| 21 | -13.3 | 0.22 | -142 | 23.4 | 14.82 | -103 | -69.7 | 3.27E-04 | 76 | -18.7 | 0.12 | 133 |
| 22 | -13.0 | 0.22 | -151 | 22.4 | 13.2 | -151 | -58.2 | 1.23E-03 | 80 | -18.5 | 0.12 | 129 |
| 23 | -12.9 | 0.23 | -157 | 21.5 | 11.9 | 164 | -63.3 | 6.80E-04 | 92 | -19.0 | 0.11 | 124 |
| 24 | -12.9 | 0.23 | -163 | 20.8 | 10.97 | 121 | -61.0 | 8.96E-04 | 44 | -20.7 | 0.09 | 119 |
| 25 | -13.0 | 0.23 | -172 | 20.3 | 10.36 | 79 | -66.1 | 4.97E-04 | 55 | -21.8 | 0.08 | 122 |
| 26 | -13.3 | 0.22 | -178 | 19.9 | 9.895 | 37 | -64.3 | 6.09E-04 | 53 | -22.9 | 0.07 | 131 |
| 27 | -13.9 | 0.2 | 174 | 19.7 | 9.691 | -6 | -63.1 | 7.00E-04 | 58 | -22.9 | 0.07 | 135 |
| 28 | -14.9 | 0.18 | 165 | 19.5 | 9.457 | -49 | -60.2 | 9.75E-04 | 68 | -22.6 | 0.07 | 142 |
| 29 | -15.8 | 0.16 | 155 | 19.4 | 9.384 | -94 | -61.9 | 8.00E-04 | 38 | -22.1 | 0.08 | 136 |
| 30 | -17.0 | 0.14 | 140 | 19.3 | 9.247 | -141 | -56.3 | 1.53E-03 | 25 | -22.4 | 0.08 | 125 |
| 31 | -19.1 | 0.11 | 113 | 19.1 | 8.972 | 171 | -57.7 | 1.31E-03 | 15 | -24.9 | 0.06 | 117 |
| 32 | -21.0 | 0.09 | 75 | 18.6 | 8.519 | 121 | -58.2 | 1.23E-03 | 1 | -31.9 | 0.03 | 126 |
| 33 | -20.5 | 0.1 | 30 | 18.1 | 7.989 | 69 | -56.0 | 1.59E-03 | -15 | -31.4 | 0.03 | -148 |
| 34 | -17.0 | 0.14 | -9 | 17.2 | 7.281 | 14 | -57.7 | 1.31E-03 | -12 | -24.4 | 0.06 | -141 |
| 35 | -14.9 | 0.18 | -31 | 16.2 | 6.44 | -43 | -59.0 | 1.12E-03 | -36 | -20.0 | 0.1 | -145 |
| 36 | -12.8 | 0.23 | -45 | 14.6 | 5.378 | -104 | -60.8 | 9.14E-04 | -40 | -16.2 | 0.16 | -152 |
| 37 | -10.7 | 0.29 | -58 | 12.1 | 4.014 | -171 | -62.9 | 7.13E-04 | -31 | -13.1 | 0.22 | -167 |
| 38 | -9.8 | 0.33 | -71 | 7.7 | 2.42 | 122 | -57.1 | 1.40E-03 | -55 | -11.1 | 0.28 | 174 |
| 39 | -9.1 | 0.35 | -77 | 1.9 | 1.238 | 65 | -61.0 | 8.94E-04 | -61 | -10.1 | 0.31 | 154 |
| 40 | -8.5 | 0.38 | -85 | -3.5 | 0.671 | 14 | -60.9 | 9.04E-04 | -59 | -9.8 | 0.33 | 134 |
| 41 | -8.6 | 0.37 | -92 | -9.2 | 0.347 | -41 | -67.6 | 4.15E-04 | -65 | -9.7 | 0.33 | 116 |
| 42 | -8.6 | 0.37 | -92 | -16.1 | 0.157 | -90 | -59.2 | 1.09E-03 | -82 | -10.1 | 0.31 | 98 |
| 43 | -8.0 | 0.4 | -92 | -23.2 | 0.069 | -134 | -61.0 | 8.95E-04 | -75 | -10.6 | 0.29 | 80 |
| 44 | -7.6 | 0.42 | -90 | -32.0 | 0.025 | -172 | -62.0 | 7.96E-04 | -59 | -11.4 | 0.27 | 62 |
| 45 | -6.0 | 0.5 | -87 | -31.7 | 0.026 | -148 | -64.6 | 5.91E-04 | -123 | -12.3 | 0.24 | 41 |
| 46 | -4.4 | 0.6 | -93 | -40.7 | 0.009 | -164 | -61.1 | 8.84E-04 | -82 | -13.2 | 0.22 | 21 |
| 47 | -3.5 | 0.67 | -98 | -46.2 | 0.005 | 62 | -102.4 | 7.57E-06 | -171 | -14.2 | 0.2 | 0 |
| 48 | -2.7 | 0.74 | -102 | -58.4 | 0.001 | 80 | -60.1 | 9.93E-04 | 176 | -14.8 | 0.18 | -27 |
| 49 | -1.8 | 0.81 | -111 | -46.4 | 0.005 | 50 | -59.2 | 1.10E-03 | -69 | -14.7 | 0.18 | -49 |
| 50 | -1.7 | 0.83 | -118 | -44.2 | 0.006 | 113 | -61.9 | 8.00E-04 | 26 | -14.9 | 0.18 | -77 |

Note:

1. Data obtained from on-wafer measurements.

Biasing and Operation

The recommended quiescent DC bias condition for optimum efficiency, performance, and reliability is $V_{d1} = 3.5$ volts and $V_{d2} = 5$ volts with V_{gg} set for $I_{d1} + I_{d2} = 780$ mA (no connection to V_{g1}). This bias arrangement results in default quiescent drain currents $I_{d1} = 280$ mA, $I_{d2} = 500$ mA. A single DC gate supply connected to V_{gg} will bias all gain stages.

If operation with both V_{d1} and V_{d2} at 5 volts is desired, an additional wire bond connection from the V_{g1} pad to V_{gg} external bypass chip capacitor (shorting V_{g1} to V_{gg}) will balance the current in each gain stage. V_{gg} (= V_{g1}) can be adjusted for $I_{d1} + I_{d2} = 780$ mA. Muting can be accomplished by setting V_{g1} and/or V_{gg} to the pinch-off voltage V_p .

An optional output power detector network is also provided. Detector sensitivity can be adjusted by biasing the diodes with typically 1 to 5 volts applied to the Det-bias terminal. Simply connecting Det-Bias to the V_{d2} supply is a convenient method of biasing this detector network. The differential voltage between the Det-Ref and Det-Out pads can be correlated with the RF power emerging from the RF output port. The detected voltage is given by:

$$V = (V_{ref} - V_{det}) - V_{ofs}$$

Where V_{ref} is the voltage at the DET_REF port, V_{det} is a voltage at the DET_OUT port, and V_{ofs} is the zero-input-power offset voltage. There are three methods to calculate V_{ofs} :

1. V_{ofs} can be measured before each detector measurement (by removing or switching off the power source and measuring $V_{ref} - V_{det}$). This method gives an error due to temperature drift of less than 0.0002 dB/°C.
2. V_{ofs} can be measured at a single reference temperature. The drift error will be less than 0.25 dB.
3. V_{ofs} can either be characterized over temperature and stored in a lookup table, or it can be measured at two temperatures and a linear fit used to calculate V_{ofs} at any temperature. This method gives an error close to method #1.

With reference to Figure 13, the RF input is DC coupled to a shunt 50 Ω resistor but it is DC blocked to the input of the first stage. The RF output is DC blocked to the output of the second stage, however, it is DC coupled to the detector bias circuit. If the output detector is biased using the on-chip optional Det-Bias network, an external DC blocking capacitor may be required at the RF Output port.

No ground wires are needed since ground connections are made with plated through-holes to the backside of the device.

Assembly Techniques

The backside of the AMMC- 5033 chip is RF ground. For microstripline applications, the chip should be attached directly to the ground plane (e.g., circuit carrier or heat-sink) using electrically conductive epoxy.^[1,2]

For best performance, the topside of the MMIC should be brought up to the same height as the circuit surrounding it. This can be accomplished by mounting a gold plated metal shim (same length and width as the MMIC) under the chip, which is of the correct thickness to make the chip and adjacent circuit coplanar.

The amount of epoxy used for chip and or shim attachment should be just enough to provide a thin fillet around the bottom perimeter of the chip or shim. The ground plane should be free of any residue that may jeopardize electrical or mechanical attachment.

The location of the RF bond pads is shown in Figure 14. Note that all the RF input and output ports are in a Ground-Signal-Ground configuration.

RF connections should be kept as short as reasonable to minimize performance degradation due to undesirable series inductance. A single bond wire is sufficient for signal connections, however double-bonding with 0.7 mil gold wire or the use of gold mesh is recommended for best performance, especially near the high end of the frequency range.

Thermosonic wedge bonding is the preferred method for wire attachment to the bond pads. Gold mesh can be attached using a 2 mil round tracking tool and a tool force of approximately 22 grams with an ultrasonic power of roughly 55 dB for a duration of 76 ± 8 mS. A guided wedge at an ultrasonic power level of 64 dB can be used for the 0.7 mil wire. The recommended wire bond stage temperature is $150 \pm 2^\circ\text{C}$.

Caution should be taken to not exceed the Absolute Maximum Rating for assembly temperature and time.

The chip is 100 μm thick and should be handled with care. This MMIC has exposed air bridges on the top surface and should be handled by the edges or with a custom collet (do not pick up die with vacuum on die center.)

This MMIC is also static sensitive and ESD handling precautions should be taken.

Notes:

1. Ablebond 84-1 LM1 silver epoxy is recommended.
2. Eutectic attach is not recommended and may jeopardize reliability of the device.

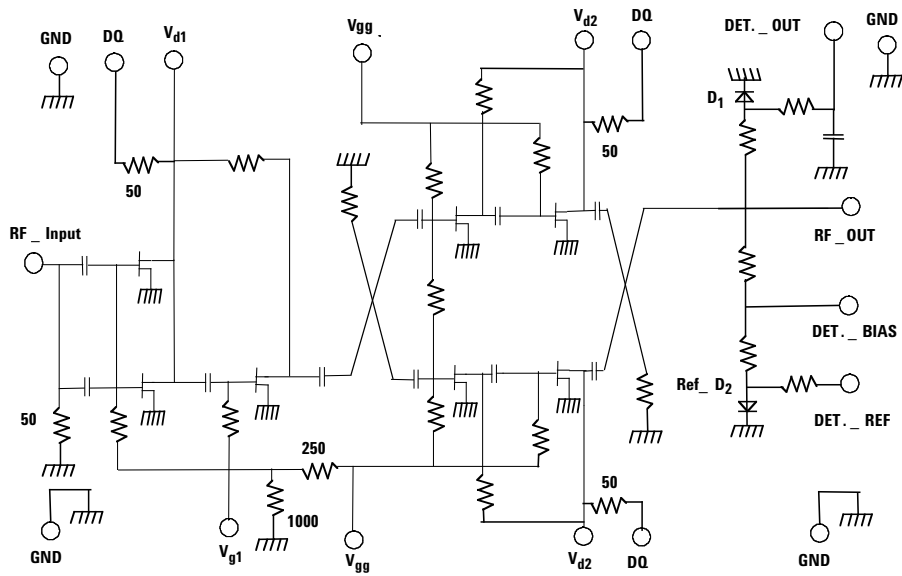


Figure 13. AMMC-5033 schematic

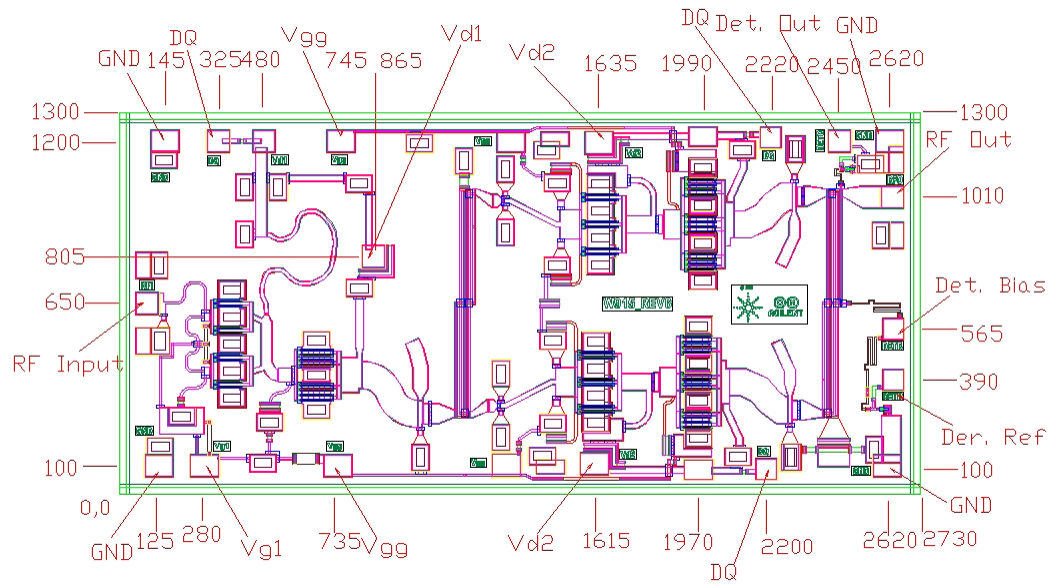


Figure 14. AMMC-5033 bonding pad locations, dimensions are in microns

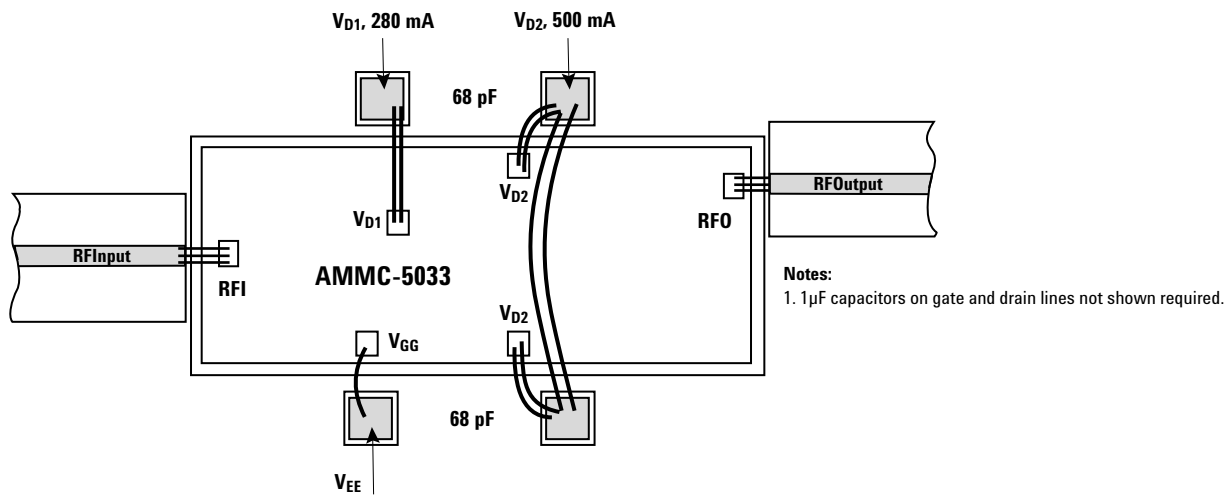


Figure 15. AMMC-5033 assembly diagram

Ordering Information:

AMMC-5033-W10 = 10 devices per tray

AMMC-5033-W50 = 50 devices per tray

For product information and a complete list of distributors, please go to our website: www.avagotech.com

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies Limited in the United States and other countries. Data subject to change. Copyright © 2005-2009 Avago Technologies Limited. All rights reserved. Obsoletes 5989-3935EN AV02-0682EN - February 25, 2009

Avago
TECHNOLOGIES

О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.

Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (XC), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

Перечень производителей, продукцию которых мы поставляем на российский рынок



С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

<http://www.tradeelectronics.ru/>