

# Low Power Dual Operational Amplifier


**IL2904**

The IL2904 contains two independent high gain operational amplifiers with internal frequency compensation. The two op-amps operate over a wide voltage range from a single power supply. Also use a split power supply. The device has low power supply current drain, regardless of the power supply voltage. The low power drain also makes the IL2904 a good choice for battery operation.

When your project calls for a traditional op-amp function, now you can streamline your design with a simple single power supply. Use ordinary +5VDC common to practically any digital system or personal computer application, without requiring an extra 15V power supply just to have the interface electronics you need.

The IL2904 is a versatile, rugged workhorse with a thousand-and-one uses, from amplifying signals from a variety of transducers to dc gain blocks, or any op-amp function. The attached pages offer some recipes that will have your project cooking in no time.

- Internally frequency compensated for unity gain
- Large DC voltage gain: 100dB
- Wide power supply range:  
3V ~ 32V (or  $\pm 1.5V \sim \pm 16V$ )
- Input common-mode voltage range includes ground
- Large output voltage swing: 0V DC to  $V_{CC} - 1.5V$  DC
- Power drain suitable for battery operation
- Low input offset voltage and offset current
- Differential input voltage range equal to the power supply voltage
- Possible to exchange the position of Pin9 for Pin1 because of Pin Connection being symmetric(IL2904S only)

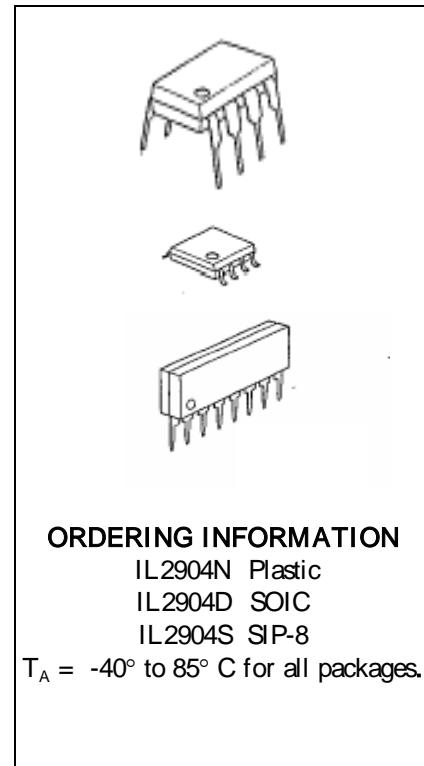

## ORDERING INFORMATION



IL2904N Plastic

IL2904D SOIC

IL2904S SIP-8

$T_A = -40^\circ$  to  $85^\circ$  C for all packages.


## LOGIC DIAGRAM

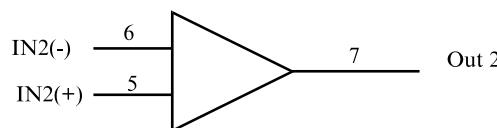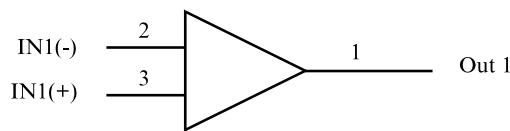

PIN 4 = GND  
PIN 8= V<sub>CC</sub>

## PIN ASSIGNMENT

OUT 1	1	●	8	V <sub>CC</sub>
IN1(-)	2		7	OUT 2
IN1(+)	3		6	IN2(-)
GND	4		5	IN2(+)

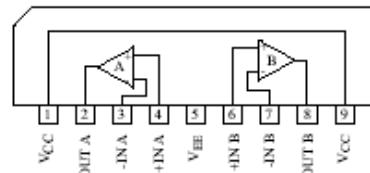

## MAXIMUM RATINGS\*

Symbol	Parameter	Value	Unit
$V_{CC}$	Power Supply Voltages Single Supply Split Supplies	32 $\pm 16$	V
$V_{IDR}$	Input Differential Voltage Range (1)	$\pm 32$	V
$V_{ICR}$	Input Common Mode Voltage Range	-0.3 to 32	V
$I_{SC}$	Output Short Circuit Duration	Continuous	
$T_J$	Junction Temperature Plastic Packages	150	°C
$T_{STG}$	Storage Temperature Plastic Packages	-55 to + 125	°C
$I_{IN}$	Input Current, per pin (2)	50	mA
$T_L$	Lead Temperature, 1mm from Case for 10 Seconds	260	°C

\* Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

Functional operation should be restricted to the Recommended Operating Conditions.

+ Derating - Plastic DIP: - 10 mW/°C from 65° to 125°C

SOIC Package: : - 7 mW/°C from 65° to 125°C

### Notes:

1. Split Power Supplies.
2.  $V_{IN} < -0.3V$ . This input current will only exist when voltage at any of the input leads is driven negative.

## RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Min	Max	Unit
$V_{CC}$	DC Supply Voltage	$\pm 2.5$ or 5.0	$\pm 15$ or 30	V
$T_A$	Operating Temperature, All Package Types	-40	+ 85	°C

This device contains protection circuitry to guard against damage due to high static voltages or electric fields. However, precautions must be taken to avoid applications of any voltage higher than maximum rated voltages to this high-impedance circuit. For proper operation,  $V_{IN}$  and  $V_{OUT}$  should be constrained to the range  $GND \leq (V_{IN} \text{ or } V_{OUT}) \leq V_{CC}$ .


Unused inputs must always be tied to an appropriate logic voltage level (e.g., either GND or  $V_{CC}$ ). Unused outputs must be left open.

DC ELECTRICAL CHARACTERISTICS ( $T_A = -40$  to  $+85^\circ\text{C}$ )


Symbol	Parameter	Test Conditions	Guaranteed Limit			Unit
			Min	Typ	Max	
$V_{IO}$	Maximum Input Offset Voltage	$V_O = 1.4\text{V}$ , $V_{CC} = 5.0\text{-}30\text{V}$ ; $R_S = 0\Omega$ $V_{ICM} = 0\text{V}$ to $V_{CC}-1.7\text{V}$			9.0 5.0*	mV
$\Delta V_{IO}/\Delta T$	Input Offset Voltage Drift	$R_S = 0\Omega$ , $V_{CC} = 30\text{V}$		7.0		$\mu\text{V}/^\circ\text{C}$
$I_{IO}$	Maximum Input Offset Current	$V_{CC} = 5.0\text{V}$			150 50*	nA
$\Delta I_{IO}/\Delta T$	Input Offset Current Drift	$R_S = 0\Omega$ , $V_{CC} = 30\text{V}$		10		$\text{pA}/^\circ\text{C}$
$I_{IB}$	Maximum Input Bias Current	$V_{CC} = 5.0\text{V}$			500 250*	nA
$V_{ICR}$	Input Common Mode Voltage Range	$V_{CC} = 30\text{V}$	0		28	V
$I_{CC}$	Maximum Power Supply Current	$R_L = \infty$ , $V_{CC} = 30\text{V}$ , $V_0 = 0\text{V}$ $R_L = \infty$ , $V_{CC} = 5\text{V}$ , $V_0 = 0\text{V}$			3 1.2	mA
$A_{VOL}$	Minimum Large Signal Open-Loop Voltage Gain	$V_{CC} = 15\text{V}$ , $R_L \geq 2\text{K}\Omega$	15 25*			V/mV
$V_{OH}$	Minimum Output High-Level Voltage Swing	$V_{CC} = 30\text{V}$ , $R_L = 2\text{K}\Omega$ $V_{CC} = 30\text{V}$ , $R_L = 10\text{K}\Omega$	26 27			V
$V_{OL}$	Maximum Output Low-Level Voltage Swing	$V_{CC} = 5\text{V}$ , $R_L = 10\text{K}\Omega$			20	mV
CMR	Common Mode Rejection	$V_{CC} = 30\text{V}$ , $R_S = 10\text{K}\Omega$	65*			dB
PSR	Power Supply Rejection	$V_{CC} = 30\text{V}$	65*			dB
CS	Channel Separation	$f = 1\text{KHz}$ to $20\text{KHz}$ , $V_{CC} = 30\text{V}$	-120*			dB
$I_{SC}$	Maximum Output Short Circuit to GND	$V_{CC} = 5.0\text{V}$			60*	mA
$I_{source}$	Minimum Source Output Current	$V_{IN+} = 1\text{V}$ , $V_{IN-} = 0\text{V}$ , $V_{CC} = 15\text{V}$ , $V_0 = 0\text{V}$	10			mA
$I_{sink}$	Minimum Output Sink Current	$V_{IN+} = 0\text{V}$ , $V_{IN-} = 1\text{V}$ , $V_{CC} = 15\text{V}$ , $V_0 = 15\text{V}$ $V_{IN+} = 0\text{V}$ , $V_{IN-} = 1\text{V}$ , $V_{CC} = 15\text{V}$ , $V_0 = 0.2\text{V}$	5 10* 12*			mA $\mu\text{A}$
$V_{IDR}$	Differential Input Voltage Range	All $V_{IN} \geq \text{GND}$ or $V$ -Supply (if used)			$V_{CC}^*$	V

<sup>\*</sup> = @ $25^\circ\text{C}$


## TYPICAL PERFORMANCE CHARACTERISTICS

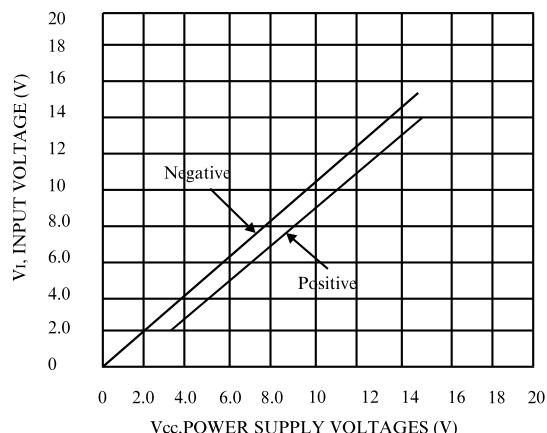


**Figure 1. Input Voltage Range**

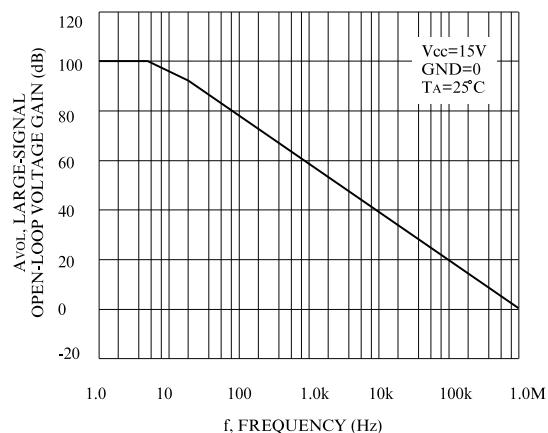


**Figure 2. Open-Loop Frequency**

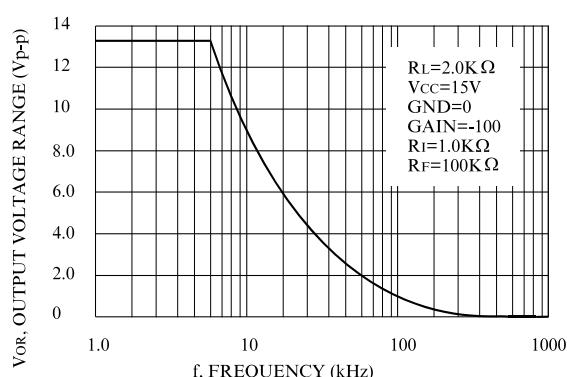


**Figure 3. Large-Signal Frequency Response**

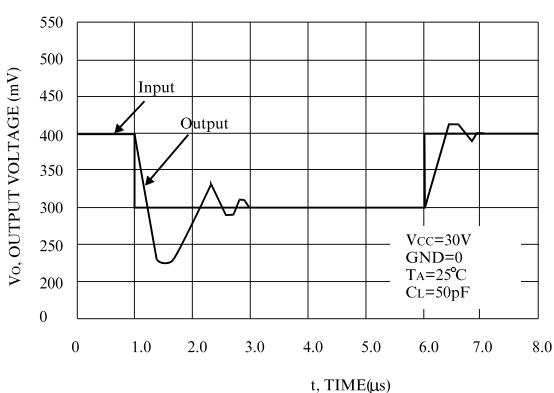




**Figure 4. Small-Signal Voltage Follower Pulse Response (Noninverting)**

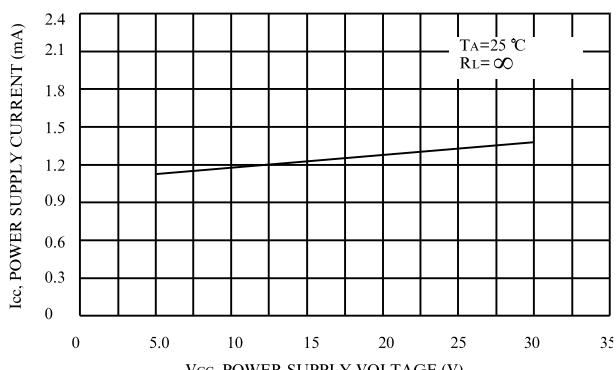

**Figure 5. Power Supply Current versus Power Supply Voltage**

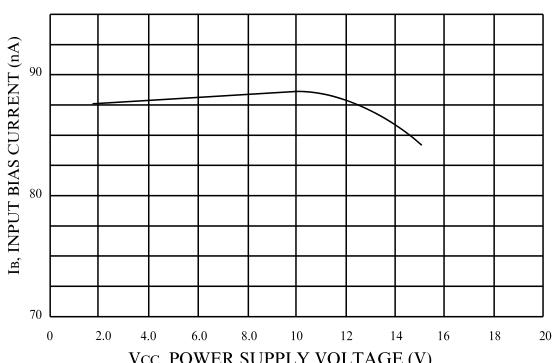



**Figure 6. Input Bias Current versus Power Supply Voltage**

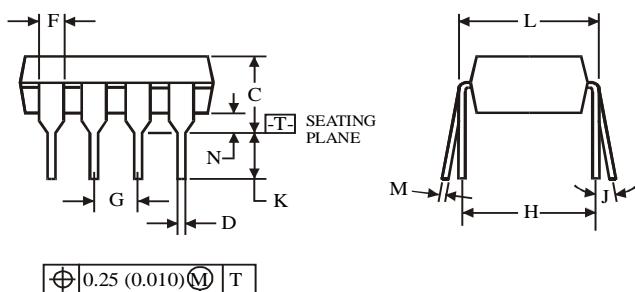**N SUFFIX PLASTIC DIP  
(MS - 001BA)**


	<b>Dimension, mm</b>	
<b>Symbol</b>	<b>MIN</b>	<b>MAX</b>
<b>A</b>	8.51	10.16
<b>B</b>	6.1	7.11
<b>C</b>		5.33
<b>D</b>	0.36	0.56
<b>F</b>	1.14	1.78
<b>G</b>		2.54
<b>H</b>		7.62
<b>J</b>	0°	10°
<b>K</b>	2.92	3.81
<b>L</b>	7.62	8.26
<b>M</b>	0.2	0.36
<b>N</b>	0.38	

**NOTES:**


- Dimensions "A", "B" do not include mold flash or protrusions.  
Maximum mold flash or protrusions 0.25 mm (0.010) per side.

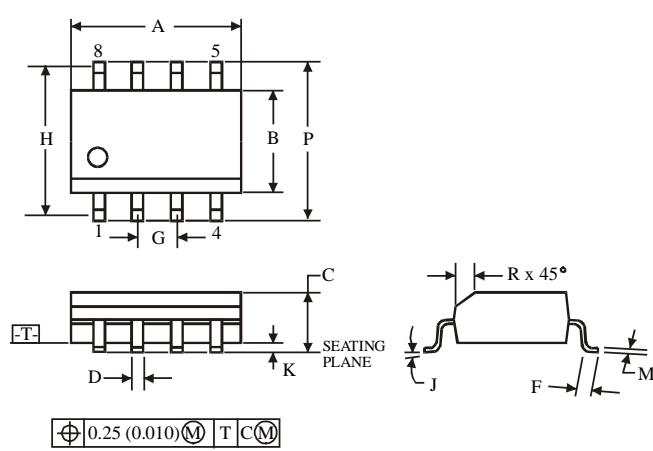**D SUFFIX SOIC  
(MS - 012AA)**


	<b>Dimension, mm</b>	
<b>Symbol</b>	<b>MIN</b>	<b>MAX</b>
<b>A</b>	4.8	5
<b>B</b>	3.8	4
<b>C</b>	1.35	1.75
<b>D</b>	0.33	0.51
<b>F</b>	0.4	1.27
<b>G</b>		1.27
<b>H</b>		5.72
<b>J</b>	0°	8°
<b>K</b>	0.1	0.25
<b>M</b>	0.19	0.25
<b>P</b>	5.8	6.2
<b>R</b>	0.25	0.5

**NOTES:**

- Dimensions A and B do not include mold flash or protrusion.
- Maximum mold flash or protrusion 0.15 mm (0.006) per side for A; for B - 0.25 mm (0.010) per side.

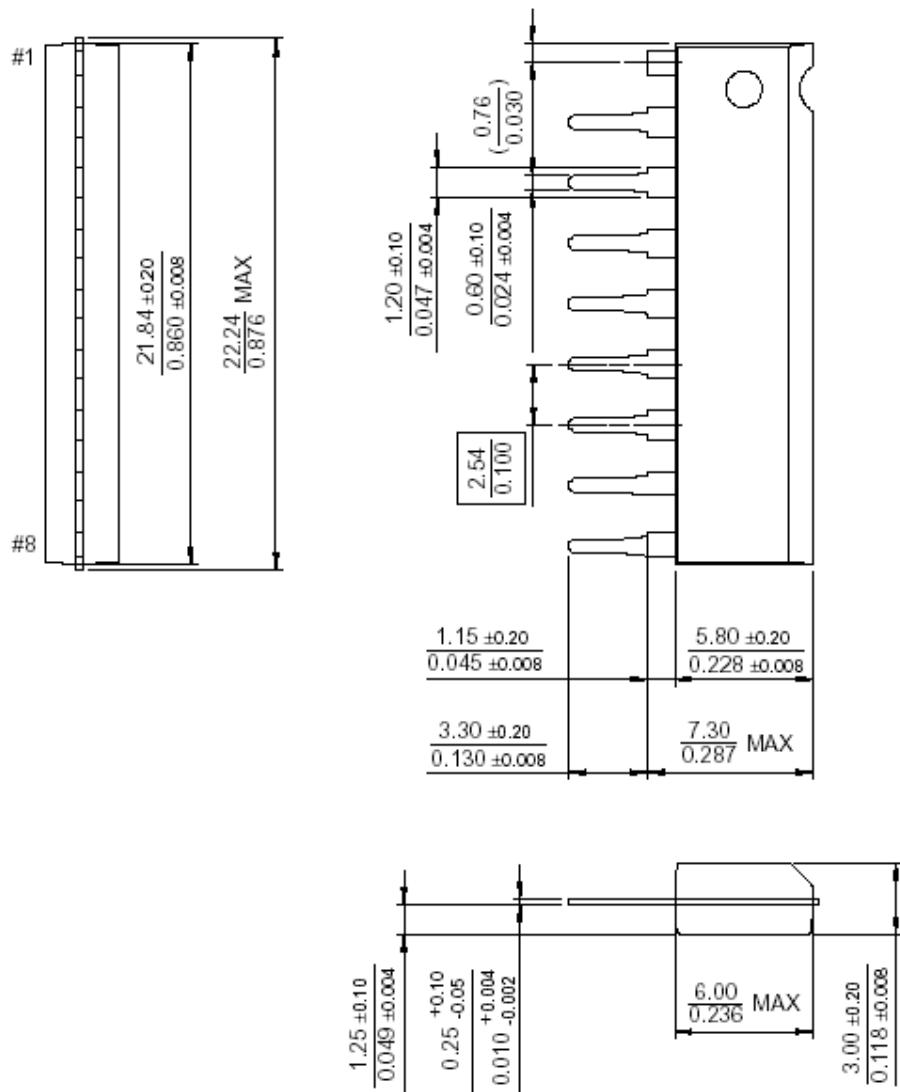**Mechanical Dimensions** (Continued)**Package****9-SIP**



гарантия бесперебойности производства и  
качества выпускаемой продукции

## О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

**Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.**

### Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (ХС), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

## Перечень производителей, продукцию которых мы поставляем на российский рынок

**AMD**

**ANALOG DEVICES**

**BOURNS**

**Coilcraft**  
The world's largest manufacturer of magnetic components

**élan tec**  
Semiconductor, Inc.

**HARRIS**

**infineon**

**JRC**

**MICREL**  
Innovation through Technology™

**MOTOROLA**

**nichicon**

**PHILIPS**

**Excellence in Electronics**  
**ROHM**

**ST SGS-THOMSON**  
Microelectronics

**Sipex**

**TAIYO YUDEN**

**TOKO**

**ZILAS**

**Winbond**  
Electronics Corp.

**Allegro**  
MicroSystems

**ATMEL**

**BURR - BROWN**  
**BB**

**EXAR**

**HITACHI**  
Inspire the Next

**intel**

**Lattice**  
Semiconductor Corporation

**muRata**  
Leader in Electronics

**OKI**

**QUALCOMM**

**SAMSUNG**

**SHARP**

**SONY**

**TDK**

**TOSHIBA**

**XORX**

**ALTERA**

**AVX**  
Ceramic

**CATALYST**

**CYPRESS**  
SEMICONDUCTOR

**FAIRCHILD**  
SEMICONDUCTOR

**HOLTEK**

**International IOR Rectifier**

**LINEAR TECHNOLOGY**  
MITSUBISHI

**National Semiconductor**

**ON Semiconductor**  
**UN**

**REALTEK**  
Ralink Semiconductor Corp.

**SANYO**

**SHINDENGEN**

**SS**

**TECCOR**  
ELECTRONICS

**TUNDRA**

**XILINX**

**Amphenol**

**Bay Linear**

**CIRRUS LOGIC**

**DALLAS**

**FUJITSU**

**IDT**

**intersil**

**MAXIM**

**molex**

**NEC**

**Panasonic**

**RENESAS**

**SII**  
SII Instruments Inc.

**SIEMENS**

**ST**

**TEXAS INSTRUMENTS**

**VISHAY**

**ZETEX**  
SEMICONDUCTORS



гарантия бесперебойности производства и  
качества выпускаемой продукции

С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

<http://www.tradeelectronics.ru/>