
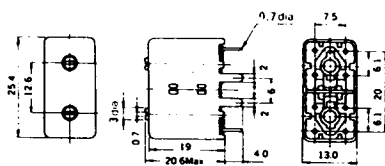



CBW Double Tuned**CBT Triple Tuned**

Frequency Range: 100MHz-240MHz

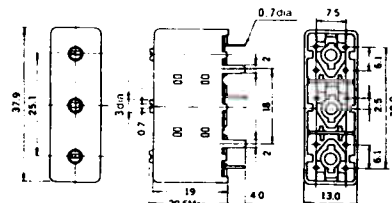

Top Tuned
Tuning Tool: Standard
(-) Etched
(0.5x2.6)



**Quality Features:**

- Good performance to size ratio.
- Superior resistance to shock, vibration, temperature and humidity variations.
- Ideal for the VHF band, such as CATV, where low insertion and very high selectivity are important.
- Nickel plated copper shield reduces insertion loss and improves selectivity.
- Brass tuning slug for distributed capacitance adjustment is a block form precisely fitted to a threaded adjustment screw for very fine adjustment. A spring between the block and top of the shield provides additional pressure to maintain setting and a constant grounding path.




- Coil form dimensions are precisely controlled through the use of high quality molds during fabrication to assure consistent spacing between grooves and a constant winding pitch. This produces superior consistency in the winding of the coil, which in turn gives more stable electrical characteristics.
- Dividing plate between coil forms is soldered to maintain consistent reference point (window) between resonators for precise coupling.
- Coil bobbin and base are formed from a specially compounded material, which promotes low insertion loss and produces outstanding stability during changes in temperature and humidity.
- Terminals feature rounded ends to facilitate PCB insertion and pre-soldered for a reliable PCB connection.
- Grounding tabs on cavity simplify grounding and improve stability.

EXAMPLES OF ELECTRICAL CHARACTERISTICS

Item	Type	CBW	CBT
Center Frequency		145MHz	145MHz
Bandwidth, at 1dB		3MHz	3MHz
Attenuation	$f_0 + 10\text{MHz}$	20dB	28dB
	$f_0 - 10\text{MHz}$	22dB	35dB
Ripple		0.3dB	0.5dB
Insertion Loss		1.3dB	2dB
Impedance		50 Ω	50 Ω

TEST CIRCUITS (BOTTOM VIEW)**CBW****CBT**

Notes: 1. Case lugs must be grounded

**CBW
271MT-1162A****CBT
272MT-1119D****CBT
272MT-1125D**

continued on next page

continued from previous page

STANDARD DEVICES SELECTION GUIDE

The Part Numbers shown in the table below are standard devices, which are readily available. TOKO will design and manufacture modified and custom devices with specific characteristics to meet your requirements. If you do not find the device for your application in this catalog, please see Modified and Custom Request Form located in the rear of this catalog.

TYPE CBW

TOKO Part Number	Center Frequency (MHz)	Bandwidth @ -1dB (MHz) min.	Selectivity Fo - 15MHz (dB) min.	Fo + 15MHz (dB) min.	Ripple (dB) max.	Insertion Loss (dB) max.	Tuning Range (MHz)
271MT-1149A	99	3.0 min.	28	18	1.0	3.5	97 101
271MT-1150A	103	3.0	29	18	1.0	2.5	101 105
271MT-1151A	107.5	3.0	30	18	0.5	2.5	105 109
271MT-1152A	111	3.0	28	18	0.5	2.5	109 113
271MT-1153A	115	2.0	32	20	0.5	2.5	113 117
271MT-1154A	119	2.5	29	21	0.5	2.5	117 121
271MT-1155A	122	2.0	27	25	0.5	2.5	119 125
271MT-1156A	126	3.0	24	23	0.5	2.5	123 129
271MT-1157A	131	3.0	23	23	0.5	2.5	127 135
271MT-1158A	138	2.0	27	24	0.5	3.0	133 143
271MT-1159A	146	2.5	27	22	0.5	3.0	141 151
271MT-1160A	154	2.5	23	20	0.5	2.5	149 159
271MT-1161A	164	2.5	27	24	0.5	3.0	157 167
271MT-1162A	171	2.5	18	16	0.5	2.5	165 177
271MT-1163A	182.5	3.0	23	20	0.5	3.0	175 190
271MT-1164A	194.5	2.5	26	22	0.5	3.5	187 202
271MT-1165A	207.5	2.5	25	23	0.5	3.5	200 215
271MT-1166A	220	2.0	17	16	0.5	3.0	210 230
271MT-1134A	138	2.2	20(-10MHz)	18(+10MHz)	1.0	2.5	134 142
271MT-1136A	167	2.4	19(-10MHz)	17(+10MHz)	1.0	2.5	162 171
271MT-1142A	176	2.6	16(-10MHz)	15(+10MHz)	1.0	2.5	170 182
271MT-1143A	187	2.8	15(-10MHz)	14(+10MHz)	1.0	2.5	180 195
271MT-1145A	216	3.0	15(-10MHz)	14(+10MHz)	1.0	3.0	207 225

TYPE CBT

TOKO Part Number	Center Frequency (MHz)	Bandwidth (MHz) Min.	Selectivity Fo - ()MHz (dB) min.	Fo + ()MHz (dB) min.	Ripple (dB) max.	Insertion Loss (dB) max.
272MT-1173A	100	4.0(BW3)	30(-15)	30(+15)	1.0	4.0
272MT-1230D	107	4.0(BW3)	44(-10)	26(+15)	1.0	4.5
272MT-1180A	110	3.0(BW3)	37(-10)	30(+10)	1.0	5.5
272MT-1177D	124	3.5(BW3)	21(-6)	17(+6)	1.0	3.5
272MT-1175D	130	3.0(BW3)	21(-5)	18(+5)	1.0	5.5
272MT-1176A	133.7	3.5(BW3)	23(-6)	18(+6)	1.0	3.5
272MT-1224L	134	5.0(BW3)	30(-10)	22(+10)	1.0	3.5
272MT-1116A	134	5.0(BW1)	24(-15)	24(+15)	1.0	3.0
272MT-1169D	137.5	2.0(BW1)	35(-10)	30(+10)	1.0	4.5
272MT-1113D	140.21	6.0(BW6)	25(-10)	21(+10)	1.0	5.0
272MT-1117D	140.21	3.7(BW1)	26(-10)	25(+10)	1.0	3.0
272MT-1119D	143	3.0(BW1)	35(-10)	22(+10)	1.0	4.0
272MT-1114A	143	6.0(BW1)	15(-10)	12(+10)	1.0	2.5
272MT-1181D	147	4.0(BW3)	20(-6)	15(+6)	1.0	3.5
272MT-1222A	154	2.0(BW1)	20(-5)	15(+5)	1.0	3.0
272MT-1219A	156.7	1.5(BW3)	40(-6)	25(+6)	1.0	7.0
272MT-1124D	157	3.5(BW3)	17(-6)	13(+6)	1.0	3.5
272MT-1174A	159	7.0(BW3)	35(-20)	33(+20)	1.0	3.0
272MT-1123A	160	1.5(BW1)	45(-15)	45(+15)	1.0	6.0
272MT-1221A	161	2.2(BW1)	32(-10)	40(+10)	1.0	4.5
272MT-1218A	161.3	1.5(BW3)	40(-6)	25(+6)	1.0	6.0
272MT-1148A	164	0.8(BW1)	35(-5)	29(+5)	1.0	8.5

continued on next page



О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.



Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (XC), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

Перечень производителей, продукцию которых мы поставляем на российский рынок





Trade Electronics.ru

гарантия бесперебойности производства и
качества выпускаемой продукции

С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

<http://www.tradeelectronics.ru/>