



16V, 180 μ A Low Power, Low Noise, Single Precision CMOS Rail-to-Rail Output Operational Amplifiers

Preliminary Technical Data

AD8663

FEATURES

Lower Power at High Voltage: 180 μ A typ

Low offset voltage: 100 μ V

Low input bias current: 300 fA Max

Low Voltage Noise:

21nV/ $\sqrt{\text{Hz}}$ @ 10kHz

23nV/ $\sqrt{\text{Hz}}$ @ 1kHz

Single-supply operation: 5V to 16V

Dual-supply operation: ± 2.5 V to ± 8 V

Output Drive 10mA

Unity Gain Stable

APPLICATIONS

Medical Equipment

Precision References

Buffer / Level Shifting

Portable Operated Systems

Sensors

Photodiode Amplification

ADC Drivers

GENERAL DESCRIPTION

The AD8663 is single rail-to-rail output single/dual supply amplifiers that use Analog Devices' patented DigiTrim[®] trimming technique to achieve low offset voltage, 300 μ V over the common mode range. The AD8663 family features an extended operating range with supply voltage up to 16V for low power operation with I_{SV} of < 325 μ A over the extended industrial temperature. These devices are designed for low noise at higher voltages, 21nV/ $\sqrt{\text{Hz}}$ at 10kHz and 23 nV/ $\sqrt{\text{Hz}}$ at 1 kHz. They also feature low input bias currents of 300fA and 10mA output drive.

The combination of low supply currents, low offsets, very low input bias currents, and wide supply range make these amplifiers useful in a wide variety of low power applications. Systems utilizing DC to low frequency measurements, or high impedance sensors, such as photo-diodes benefit from the combination of low input bias current, low noise, low offset and drive current. The wide operating voltage range matches today's high performance ADCs and DACs. Medical monitoring equipment can take advantage of the low voltage noise, high input impedance, low voltage and current noise.

The AD8663 is specified over the extended industrial (-40°C to $+125^{\circ}\text{C}$) temperature range.

Rev. PrA

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

PIN CONFIGURATIONS

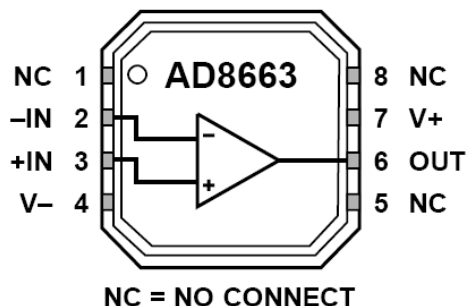


Figure 1. 8-Lead LFCSP_VD
(CP-16-4 Suffix)

05200-035

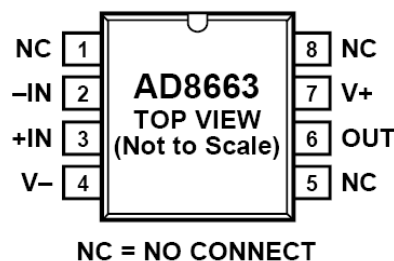


Figure 2. 8-Lead SOIC_N
(R-8 Suffix)

05200-002

TABLE OF CONTENTS

Features	1	Specifications	3
Applications.....	1	Absolute Maximum Ratings	5
General Description	1	Thermal Resistance	5
Pin Configurations	1	ESD Caution.....	5
Revision History	2	Ordering Guide	5
Specifications.....	Error! Bookmark not defined.		

REVISION HISTORY

4/07—Revision 0: Initial Version

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS

$V_S = 5.0\text{ V}$, $V_{CM} = V_S/2$, $T_A = 25^\circ\text{C}$ unless otherwise noted.

Table 1.

Parameter	Symbol	Test Conditions/Comments	Min	Typ	Max	Unit
INPUT CHARACTERISTICS						
Offset Voltage	V_{OS}	$V_{CM} = 2.5\text{ V}$			100	μV
		$-40^{\circ}\text{C} < T_A < +125^{\circ}\text{C}$			350	μV
		$V_{CM} = 0\text{ V to } 3.5\text{ V}$		70	300	μV
		$-40^{\circ}\text{C} < T_A < +85^{\circ}\text{C}$		100	450	μV
		$V_{CM} = 0.2\text{ V to } 3.5\text{ V}, -40^{\circ}\text{C} < T_A < +125^{\circ}\text{C}$		100	450	μV
Input Bias Current	I_B			0.3		pA
		$-40^{\circ}\text{C} < T_A < +85^{\circ}\text{C}$			20	pA
		$-40^{\circ}\text{C} < T_A < +125^{\circ}\text{C}$			150	pA
Input Offset Current	I_{OS}			0.2		pA
		$-40^{\circ}\text{C} < T_A < +85^{\circ}\text{C}$			15	pA
		$-40^{\circ}\text{C} < T_A < +125^{\circ}\text{C}$			50	pA
Input Voltage Range	IVR	$-40^{\circ}\text{C} < T_A < +85^{\circ}\text{C}$	0		3.5	V
		$-40^{\circ}\text{C} < T_A < +125^{\circ}\text{C}$	0.2		3.5	V
Common-Mode Rejection Ratio	CMRR	$V_{CM} = 0\text{ V to } 3.5\text{ V}$	80	90		dB
		$V_{CM} = 0.2\text{ V to } 3.5\text{ V}, -40^{\circ}\text{C} < T_A < +125^{\circ}\text{C}$	80	90		dB
Large Signal Voltage Gain	A_{VO}	$R_L = 2\text{ k}\Omega, V_O = 0.5\text{ V to } 4.5\text{ V}$	106	115		dB
Offset Voltage Drift	$\Delta V_{OS}/\Delta T$	$-40^{\circ}\text{C} < T_A < +125^{\circ}\text{C}$		1.3	5	$\mu\text{V}/^{\circ}\text{C}$
OUTPUT CHARACTERISTICS						
Output Voltage High	V_{OH}	$I_L = 1\text{ mA}$	4.65	4.8		V
		$-40^{\circ}\text{C} < T_A < +125^{\circ}\text{C}$	4.6	4.7		V
Output Voltage Low	V_{OL}	$I_L = 1\text{ mA}$		150	200	mV
		$-40^{\circ}\text{C} < T_A < +125^{\circ}\text{C}$		200	250	mV
Short-Circuit Current	I_{SC}			± 6		mA
Closed-Loop Output Impedance	Z_{OUT}	$f = 100\text{ kHz}, A_V = 1$		120		Ω
POWER SUPPLY						
Power Supply Rejection Ratio	PSRR	$V_S = 5\text{ V to } 16\text{ V}$	95	105		dB
Supply Current/Amplifier	I_{SY}			180	275	μA
		$-40^{\circ}\text{C} < T_A < +125^{\circ}\text{C}$			325	μA
DYNAMIC PERFORMANCE						
Slew Rate	SR	$R_L = 2\text{ k}\Omega$		0.2		V/ μs
Settling Time	t_s	To 0.1%, 0 V to 2 V step, $A_V = 10$		12		μs
Gain Bandwidth Product	GBP			600		kHz
Phase Margin	Φ_M			60		Degrees
NOISE PERFORMANCE						
Peak-to-Peak Noise	$e_{n\text{ p-p}}$	$f = 0.1\text{ Hz to } 10\text{ Hz}$		3		$\mu\text{V p-p}$
Voltage Noise Density	e_n	$f = 10\text{ kHz}$		21		nV/ $\sqrt{\text{Hz}}$
		$f = 1\text{ kHz}$		23		nV/ $\sqrt{\text{Hz}}$
Current Noise Density	i_n	$f = 1\text{ kHz}$		0.05		pA/ $\sqrt{\text{Hz}}$

$V_S = 16\text{ V}$, $V_{CM} = V_S/2$, $T_A = 25^\circ\text{C}$ unless otherwise noted.

Table 2.

Parameter	Symbol	Test Conditions/Comments	Min	Typ	Max	Unit
INPUT CHARACTERISTICS						
Offset Voltage	V _{OS}	V _{CM} = 8 V		40	300	μV
		−40°C < T _A < +125°C			350	μV
		V _{CM} = 0 V to 14.5 V		70	300	μV
		−40°C < T _A < +85°C			450	μV
		V _{CM} = 0.2 V to 14.5 V, −40°C < T _A < +125°C			450	μV
Input Bias Current	I _B			0.3		pA
		−40°C < T _A < +85°C			30	pA
		−40°C < T _A < +125°C			250	pA
Input Offset Current	I _{OS}			0.2		pA
		−40°C < T _A < +85°C			25	pA
		−40°C < T _A < +125°C			150	pA
Input Voltage Range	IVR	−40°C < T _A < +85°C	0		14.5	V
		−40°C < T _A < +125°C	0.2		14.5	V
Common-Mode Rejection Ratio	CMRR	V _{CM} = 0 V to 14.5 V	90	100		dB
		V _{CM} = 0.2 V to 14.5 V, −40°C < T _A < +125°C	90	100		dB
Large Signal Voltage Gain	A _{VO}	R _L = 2 kΩ, V _O = 0.5 V to 15.5 V	112	124		dB
Offset Voltage Drift	ΔV _{OS} /ΔT			1.2	5	μV/°C
OUTPUT CHARACTERISTICS						
Output Voltage High	V _{OH}	I _L = 1 mA	15.8	15.9		V
		I _L = 10 mA	14.8	15.1		V
		I _L = 10 mA, −40°C < T _A < +125°C	14.65	14.8		V
Output Voltage Low	V _{OL}	I _L = 1 mA		80	100	mV
		I _L = 10 mA		600	720	mV
		I _L = 10 mA, −40°C < T _A < +125°C		800	900	mV
				±50		mA
Short-Circuit Current	I _{SC}					mA
Closed-Loop Output Impedance	Z _{OUT}	f = 100 kHz, A _V = 1		100		Ω
POWER SUPPLY						
Power Supply Rejection Ratio	PSRR	V _S = 5 V to 16 V, −40°C < T _A < +125°C	95	105		dB
Supply Current/Amplifier	I _{SY}			230	285	μA
		−40°C < T _A < +125°C			325	μA
DYNAMIC PERFORMANCE						
Slew Rate	SR	R _L = 2 kΩ		0.3		V/μs
Settling Time	t _s	To 0.1%, 0 V to 2 V step		12		μs
Gain Bandwidth Product	GBP			600		kHz
Phase Margin	Φ _M			60		Degrees
NOISE PERFORMANCE						
Peak-to-Peak Noise	e _{n p-p}	f = 0.1 Hz to 10 Hz		3		μV p-p
Voltage Noise Density	e _n	f = 1 kHz		23		nV/√Hz
		f = 10 kHz		21		nV/√Hz
Current Noise Density	i _n	f = 1 kHz		0.05		pA/√Hz

ABSOLUTE MAXIMUM RATINGS

Table 1.

Parameter	Rating
Supply Voltage	18V
Input Voltage	V _S supply
Differential Input Voltage	18V
Output Short-Circuit Duration to GND	Indefinite
Storage Temperature Range	–65°C to +150°C
Operating Temperature Range	–40°C to +125°C
Junction Temperature Range	–65°C to +150°C
Lead Temperature (Soldering 60 sec)	300°C

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

THERMAL RESISTANCE

θ_{JA} is specified for the worst-case conditions, that is, a device soldered in circuit board for surface-mount packages.

Table 2.

Package Type	θ_{JA}	θ_{JC}	Unit
8-Lead SOIC_N	121	43	°C/W
8-Lead LFCSP_VD	75	18	°C/W

ESD CAUTION

ESD (electrostatic discharge) sensitive device. Electrostatic charges as high as 4000V readily accumulate on the human body and test equipment and can discharge without detection. Although this product features proprietary ESD protection circuitry, permanent damage may occur on devices subjected to high energy electrostatic discharges. Therefore, proper ESD precautions are recommended to avoid performance degradation or loss of functionality.



ORDERING GUIDE

Model	Temperature Range	Package Description	Package Option
AD8663ACPZ-R2 ¹	–40°C to +125°C	8-Lead Lead Frame Chip Scale Package [LFCSP_VD]	CP-8-2
AD8663ACPZ-R7 ¹	–40°C to +125°C	8-Lead Lead Frame Chip Scale Package [LFCSP_VD]	CP-8-2
AD8663ACPZ-RL ¹	–40°C to +125°C	8-Lead Lead Frame Chip Scale Package [LFCSP_VD]	CP-8-2
AD8663ARZ ¹	–40°C to +125°C	8-Lead Standard Small Outline Package [SOIC_N]	R-8
AD8663ARZ-R7 ¹	–40°C to +125°C	8-Lead Standard Small Outline Package [SOIC_N]	R-8
AD8663ARZ-RL ¹	–40°C to +125°C	8-Lead Standard Small Outline Package [SOIC_N]	R-8

¹ Z = Pb-free part.



О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.


Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (XC), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

Перечень производителей, продукцию которых мы поставляем на российский рынок





Trade Electronics.ru

гарантия бесперебойности производства и
качества выпускаемой продукции

С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

<http://www.tradeelectronics.ru/>