


Thin-Profile 7-mm Photoelectric Sensor

E3HF

Thin Flat-pack Style

- Just 7 mm (0.276 in) thick
- NPN transistor output switches 80 mA
- Choose Light-ON or Dark-ON operation models
- Top and side through holes make mounting easy
- 3 pairs of focusing slits supplied with separate type sensors

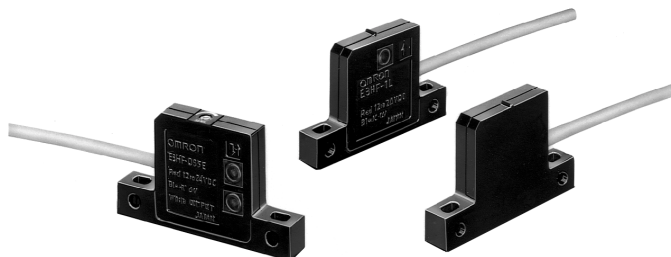

Ordering Information

■ SENSORS

Method of detection		Through-beam	Diffuse reflective
Sensing distance		1 m (3.28 ft)	5 cm (1.97 in)
Part number	Light-ON operation	E3HF-1E1	E3HF-DS5E1
	Dark-ON operation	E3HF-1E2	E3HF-DS5E2

Specifications

Part number		E3HF-1E□	E3HF-DS5E□□□
Method of detection		Through-beam	Diffuse reflective
Supply voltage		12 to 24 VDC	
Current consumption	Emitter	25 mA max.	30 mA max.
	Receiver	15 mA max.	
Sensing distance		1 m (3.28 ft)	50 mm (1.97 in) with 3 x 3 cm (1.18 x 1.18 in) 90% reflectance white mat paper
Light source		Pulse modulate Infrared LED	
Detectable object type		Opaque materials, 6 mm (0.24 in) minimum dimension	Opaque materials
Operation mode	Light-ON	E3HF-□□□E1	
	Dark-ON	E3HF-□□□E2	
Sensitivity		Fixed	Adjustable


(Table continues on the next page)

Specifications Table - continued from previous page

Part number		E3HF-1E□		E3HF-DS5E□□□	
Output	Type		NPN open collector with pull-up resistor		
	Max. load		Load (relay, sink) logic: 80 mA Voltage (source) logic: 1.5 to 3 mA		
	Max. on-state voltage drop		1 VDC at 80 mA		
Response time	On		5 ms max.		3 ms max.
	Off		5 ms max.		3 ms max.
Circuit protection	Output short-circuit		Provided		
	DC power supply reverse polarity		Provided		
Indicators	Emitter		Power On (red LED)		Light incident (red LED)
	Receiver		Light Incident (red LED)		
Materials	Lens		Plastic		
	Case		Plastic		
Mounting			Top and side surface with two through holes		
Connections	Cable	Emitter	2-conductor cable, 2 m (6.56 ft) length		3-conductor cable, 2 m (6.56 ft)
		Receiver	3-conductor cable, 2 m (6.56 ft)		
Weight	Emitter		40 g (1.4 oz)		40 g (1.4 oz)
	Receiver		40 g (1.4 oz)		
Enclosure ratings	NEMA		1, 3, 4X, 12		
	IEC 144		IP64		
Ambient temperature	Operating		-25° to 55°C (-13° to 131°F)		
	Storage		-30° to 70°C (-22° to 158°F)		

Operation


■ OUTPUT CIRCUIT DIAGRAM

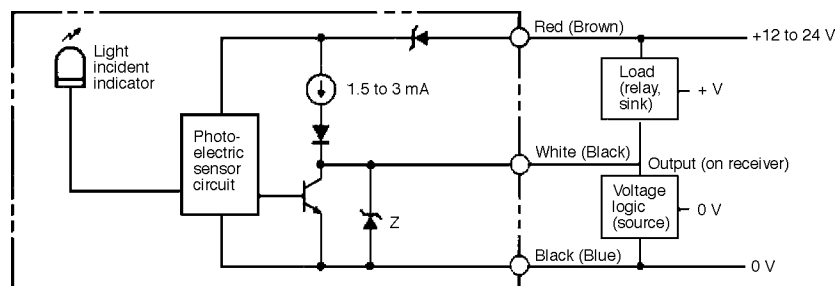


Note: IEC colors are shown in parentheses.

■ TIMING CHARTS

Light-ON operation mode

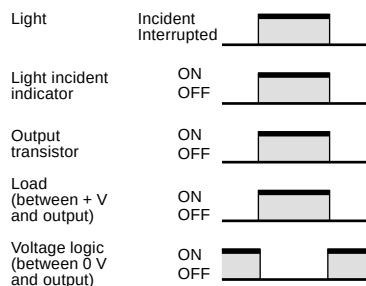


Dark-ON operation mode

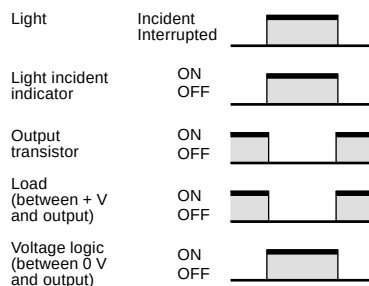


Engineering Data

■ EXCESS GAIN

Through-Beam Type

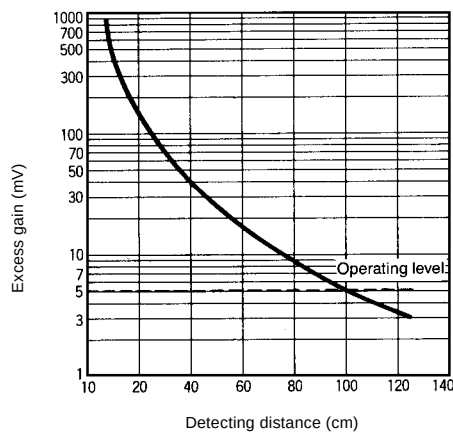


■ DIFFUSE REFLECTIVE TYPE

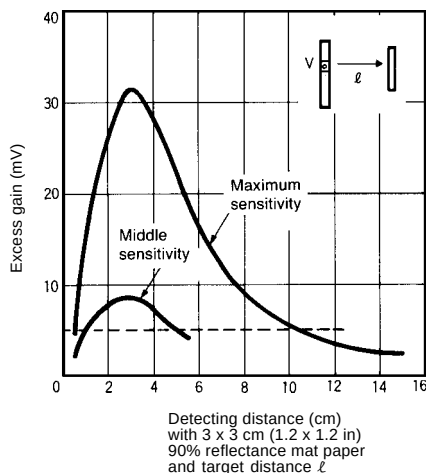


■ LIGHT SOURCE/RECEIVER SETTING RANGE

Through-Beam Type

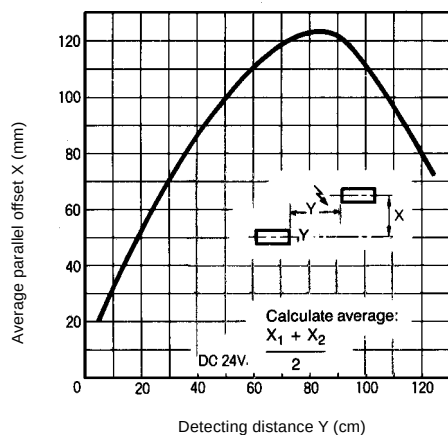

■ OPERATING RANGE

Diffuse Reflective Type

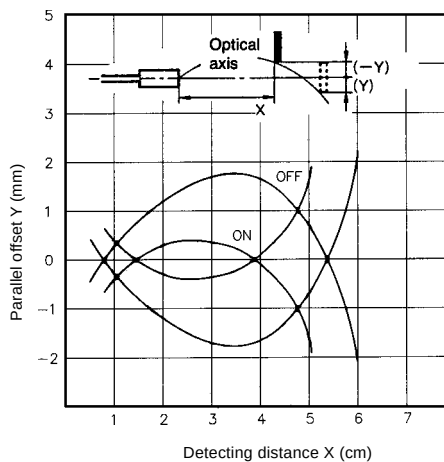


Dimensions


Unit: mm

Through-beam Type


Light Source

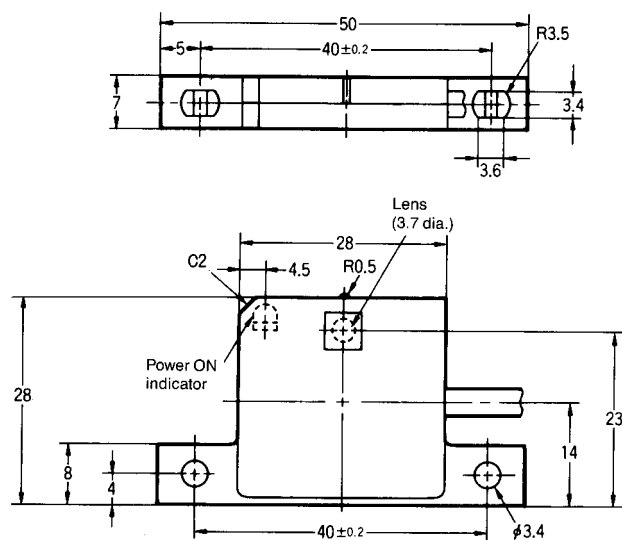

Receiver

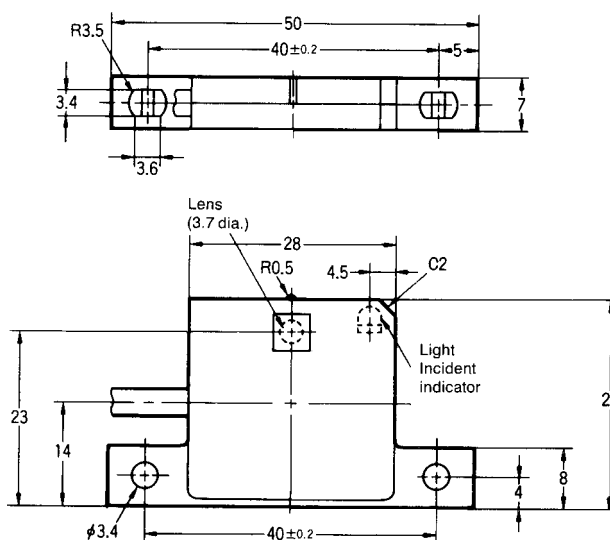

Diffuse Reflective Type

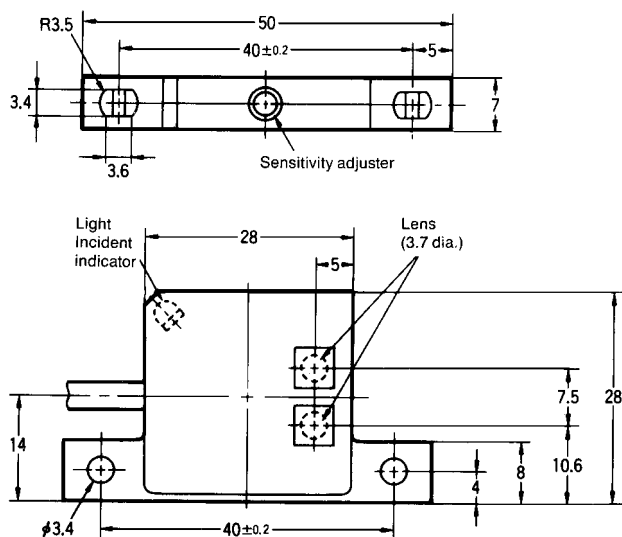

■ SLITS FOR THROUGH-BEAM

Using slits reduces the sensing distance and allows smaller objects to be detected.

Three pairs of slits are supplied with E3HF-1E1 and E3HF-1E2 sensors. The slits are decals that can be peeled off the protective backing sheet and applied to the emitter and receiver. See table below for dimensions of slit openings.

Slit width	0.5 mm (0.020 in)	1 mm (0.039 in)	2 mm (0.079 in)
Sensing distance	12 cm (4.74 in)	20 cm (7.87 in)	40 cm (15.75 in)
Minimum detectable object size	0.5 mm (0.020 in)	1 mm (0.039 in)	2 mm (0.079 in)

**OMRON ELECTRONICS LLC**

One East Commerce Drive
Schaumburg, IL 60173

1-800-55-OMRON

Cat. No. CEDSAX4

11/01

OMRON ON-LINE

Global - <http://www.omron.com>

USA - <http://www.omron.com/oei>

Canada - <http://www.omron.com/oci>

Specifications subject to change without notice.

OMRON CANADA, INC.

885 Milner Avenue

Scarborough, Ontario M1B 5V8

416-286-6465

Printed in the U.S.A.



О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.




Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (XC), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

Перечень производителей, продукцию которых мы поставляем на российский рынок





Trade Electronics.ru

гарантия бесперебойности производства и
качества выпускаемой продукции

С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

<http://www.tradeelectronics.ru/>