


## HF3 Relay

- Y-Design
- Frequency range DC to 3GHz
- Impedance 50Ω or 75Ω
- Small dimensions (14.6x7.2x10mm)
- 1 form C contact (1 changeover contact)
- Immersion cleanable
- Low power consumption (≤140mW)

### Typical applications

Cable modems and linecards/ CATV, Tabs, measurement and test equipment ATE, satellite / audio / video tuners, wireless base stations and antennas, switching boards



### Contact Data

|                                   |                              |
|-----------------------------------|------------------------------|
| Contact arrangement               | 1 form C, 1 CO               |
| Max. switching voltage            | 220VDC, 250VAC               |
| Rated current                     | 2A                           |
| Limiting continuous current, 23°C | 2A                           |
| Switching power                   | 60W, 62.5VA,<br>50W (2.5GHz) |
| Max. continuous RF-power, 23°C    | 50W (2.5GHz)                 |
| Contact material                  | Ag, Au covered               |
| Minimum switching voltage         | 100μV                        |
| Initial contact resistance        | <100mΩ at 10mA, 20mV         |
| Operate time                      | typ. 3ms, max. 5ms           |
| Release time                      |                              |
| without diode in parallel         | typ. 2ms, max. 5ms           |
| with diode in parallel            | typ. 4ms, max. 6ms           |
| Bounce time                       | typ. 1ms, max. 3ms           |
| Duration of set/reset pulse min.  | 20ms                         |
| Mechanical endurance              | 10 <sup>7</sup> operations   |

### Coil Data

|                    |            |
|--------------------|------------|
| Coil voltage range | 3 to 24VDC |
|--------------------|------------|

### Coil versions, monostable

| Coil code                              | Rated voltage VDC | Operate voltage VDC | Limiting voltage VDC | Release voltage VDC | Coil resistance Ω±10% | Rated coil power mW |
|----------------------------------------|-------------------|---------------------|----------------------|---------------------|-----------------------|---------------------|
| <b>50Ω version, monostable, 1 coil</b> |                   |                     |                      |                     |                       |                     |
| 51                                     | 3                 | 2.25                | 6.50                 | 0.30                | 64                    | 140                 |
| 52                                     | 4.5               | 3.38                | 9.80                 | 0.45                | 145                   | 140                 |
| 53                                     | 5                 | 3.75                | 10.90                | 0.50                | 178                   | 140                 |
| 54                                     | 6                 | 4.50                | 13.00                | 0.60                | 257                   | 140                 |
| 55                                     | 9                 | 6.75                | 19.60                | 0.90                | 574                   | 140                 |
| 56                                     | 12                | 9.00                | 26.10                | 1.20                | 1028                  | 140                 |
| 57                                     | 24                | 18.00               | 52.30                | 2.40                | 4114                  | 140                 |
| <b>75Ω version, monostable, 1 coil</b> |                   |                     |                      |                     |                       |                     |
| 01                                     | 3                 | 2.25                | 6.50                 | 0.30                | 64                    | 140                 |
| 02                                     | 4.5               | 3.38                | 9.80                 | 0.45                | 145                   | 140                 |
| 03                                     | 5                 | 3.75                | 10.90                | 0.50                | 178                   | 140                 |
| 04                                     | 6                 | 4.50                | 13.00                | 0.60                | 257                   | 140                 |
| 05                                     | 9                 | 6.75                | 19.60                | 0.90                | 574                   | 140                 |
| 06                                     | 12                | 9.00                | 26.10                | 1.20                | 1028                  | 140                 |
| 07                                     | 24                | 18.00               | 52.30                | 2.40                | 4114                  | 140                 |

All figures are given for coil without pre-energization, at ambient temperature +23°C.

### Coil Data (continued)

#### Coil versions, bistable

| Coil code                             | Rated voltage VDC | Set voltage VDC | Limiting voltage VDC | Reset voltage VDC | Coil resistance Ω±10% | Rated coil power mW |
|---------------------------------------|-------------------|-----------------|----------------------|-------------------|-----------------------|---------------------|
| <b>50Ω version, bistable, 1 coil</b>  |                   |                 |                      |                   |                       |                     |
| 71                                    | 3                 | 2.25            | 9.20                 | -2.25             | 128                   | 70                  |
| 72                                    | 4.5               | 3.38            | 13.85                | -3.38             | 289                   | 70                  |
| 73                                    | 5                 | 3.75            | 15.30                | -3.75             | 357                   | 70                  |
| 74                                    | 6                 | 4.50            | 18.50                | -4.50             | 514                   | 70                  |
| 75                                    | 9                 | 6.75            | 27.70                | -6.75             | 1157                  | 70                  |
| 76                                    | 12                | 9.00            | 37.00                | -9.00             | 2057                  | 70                  |
| 77                                    | 24                | 18.00           | 74.00                | -18.00            | 8228                  | 70                  |
| <b>50Ω version, bistable, 2 coils</b> |                   |                 |                      |                   |                       |                     |
| 91                                    | 3                 | 2.25            | 6.50                 | 2.25              | 64                    | 140                 |
| 92                                    | 4.5               | 3.38            | 9.80                 | 3.38              | 145                   | 140                 |
| 93                                    | 5                 | 3.75            | 10.90                | 3.75              | 178                   | 140                 |
| 94                                    | 6                 | 4.50            | 13.00                | 4.50              | 257                   | 140                 |
| 95                                    | 9                 | 6.75            | 19.60                | 6.75              | 574                   | 140                 |
| 96                                    | 12                | 9.00            | 26.10                | 9.00              | 1028                  | 140                 |
| 97                                    | 24                | 18.00           | 52.30                | 18.00             | 4114                  | 140                 |

All figures are given for coil without pre-energization, at ambient temperature +23°C.

### Coil Data (continued)



#### Coil versions, bistable

| Coil code                             | Rated voltage VDC | Set voltage VDC | Limiting voltage VDC | Reset voltage VDC | Coil resistance Ω±10% | Rated coil power mW |
|---------------------------------------|-------------------|-----------------|----------------------|-------------------|-----------------------|---------------------|
| <b>75Ω version, bistable, 1 coil</b>  |                   |                 |                      |                   |                       |                     |
| 21                                    | 3                 | 2.25            | 9.20                 | -2.25             | 128                   | 70                  |
| 22                                    | 4.5               | 3.38            | 13.85                | -3.38             | 289                   | 70                  |
| 23                                    | 5                 | 3.75            | 15.30                | -3.75             | 357                   | 70                  |
| 24                                    | 6                 | 4.50            | 18.50                | -4.50             | 514                   | 70                  |
| 25                                    | 9                 | 6.75            | 27.70                | -6.75             | 1157                  | 70                  |
| 26                                    | 12                | 9.00            | 37.00                | -9.00             | 2057                  | 70                  |
| 27                                    | 24                | 18.00           | 74.00                | -18.00            | 8228                  | 70                  |
| <b>75Ω version, bistable, 2 coils</b> |                   |                 |                      |                   |                       |                     |
| 41                                    | 3                 | 2.25            | 6.50                 | 2.25              | 64                    | 140                 |
| 42                                    | 4.5               | 3.38            | 9.80                 | 3.38              | 145                   | 140                 |
| 43                                    | 5                 | 3.75            | 10.90                | 3.75              | 178                   | 140                 |
| 44                                    | 6                 | 4.50            | 13.00                | 4.50              | 257                   | 140                 |
| 45                                    | 9                 | 6.75            | 19.60                | 6.75              | 574                   | 140                 |
| 46                                    | 12                | 9.00            | 26.10                | 9.00              | 1028                  | 140                 |
| 47                                    | 24                | 18.00           | 52.30                | 18.00             | 4114                  | 140                 |

All figures are given for coil without pre-energization, at ambient temperature +23°C.

## HF3 Relay (Continued)

### Coil operating Range

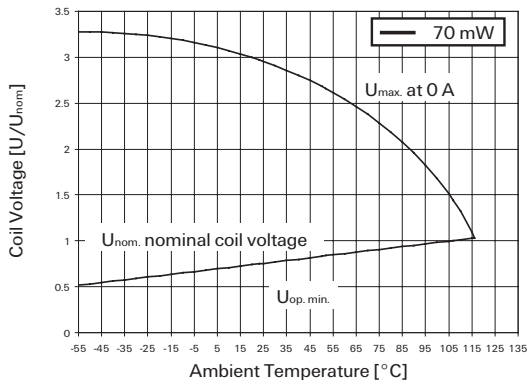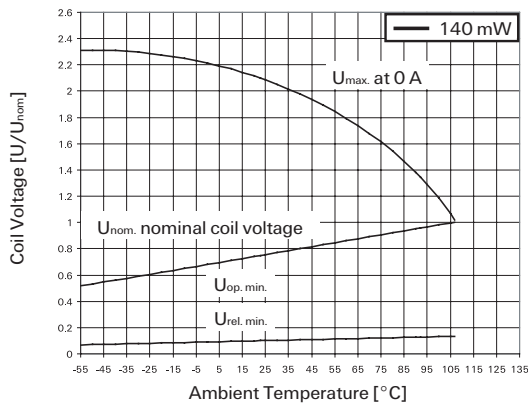

### RF Data

|                                    |                |                |
|------------------------------------|----------------|----------------|
| Isolation                          |                |                |
| at 100MHz/900MHz                   | 80dB/72dB      | 80dB/72dB      |
| at 3GHz                            | 45dB           | 40dB           |
| Insertion loss                     |                |                |
| at 100MHz/900MHz                   | 0.03dB/0.12dB  | 0.03dB/0.12dB  |
| at 3GHz                            | 0.35dB         | 0.40dB         |
| Voltage standing wave ratio (VSWR) |                |                |
| at 100MHz/900MHz/3GHz              | 1.05/1.20/1.20 | 1.05/1.20/1.40 |

### Other Data

Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at [www.te.com/customer-support/rohssupportcenter](http://www.te.com/customer-support/rohssupportcenter)


|                                                  |                                     |
|--------------------------------------------------|-------------------------------------|
| Ambient temperature                              | -55°C to +85°C                      |
| Thermal resistance                               | <165K/W                             |
| Category of environmental protection             |                                     |
| IEC 61810                                        | RT III - wash tight                 |
| Degree of protection, IEC 60529                  | IP 67, immersion cleanable          |
| Vibration resistance (functional)                | 35g, 10 to 1000Hz                   |
| Shock resistance (functional), half sinus 11ms   | 50g                                 |
| Shock resistance (destructive), half sinus 0.5ms | 150g                                |
| Terminal type                                    | SMT                                 |
| Weight                                           | max. 2.5g                           |
| Resistance to soldering heat SMT                 |                                     |
| IEC 60068-2-58                                   | 265°C/10s                           |
| Moisture sensitive level, JEDEC J-Std-020D       | MSL3                                |
| Ultrasonic cleaning                              | not recommended                     |
| Packaging/unit                                   | reel/400 pcs., box/400 or 2000 pcs. |

### Insulation Data


|                                 | 50Ω version          | 75Ω version |
|---------------------------------|----------------------|-------------|
| Initial dielectric strength     |                      |             |
| between open contacts           | 600V <sub>rms</sub>  |             |
| between contact and coil        | 1000V <sub>rms</sub> |             |
| Initial surge withstand voltage |                      |             |
| between open contacts           | 1000V                |             |
| between contact and coil        | 1500V                |             |

## HF3 Relay (Continued)


Typical RF performance, 50Ω version

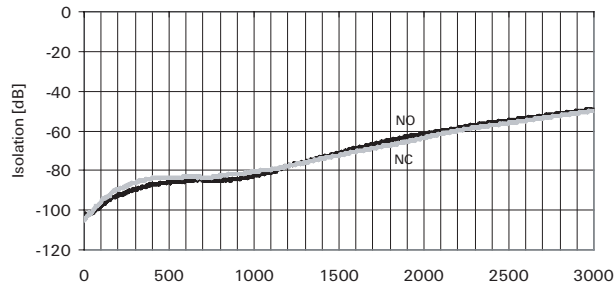




Typical RF performance, 75Ω version

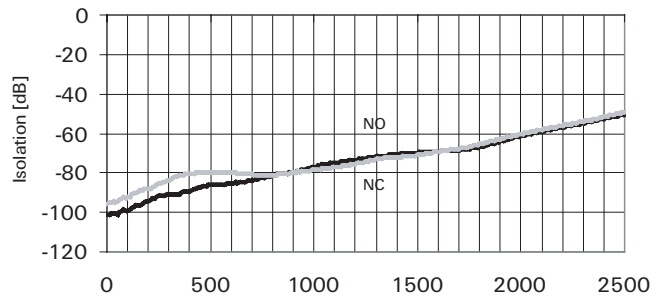

Typical RF performance, 50Ω version (continued)

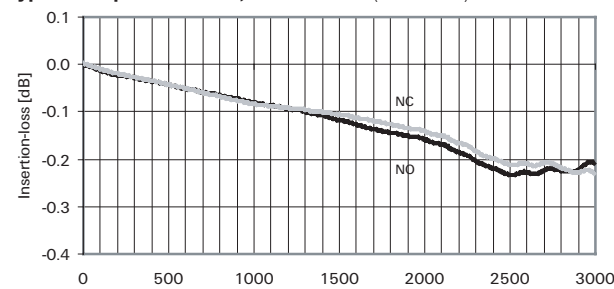


Typical RF performance, 75Ω version (continued)

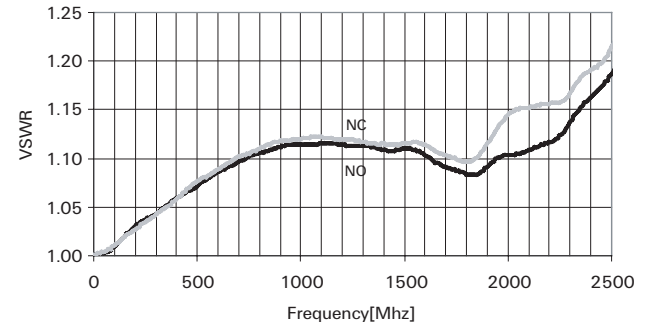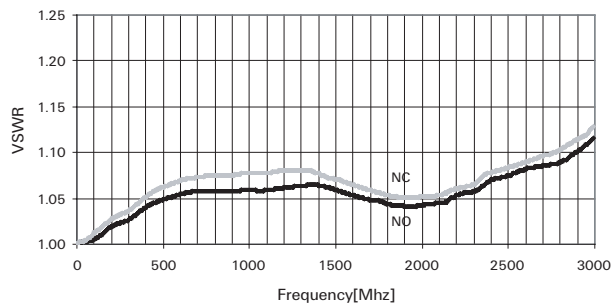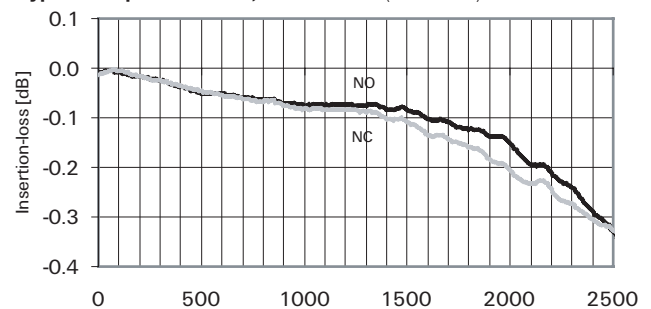


### Terminal assignment

TOP view on component side of PCB


Monostable

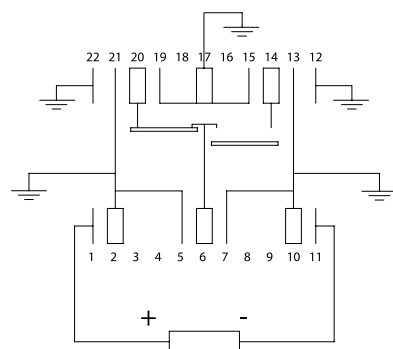

Bistable, 1 coil

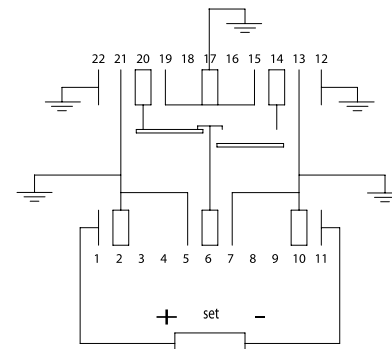

Bistable, 2 coils

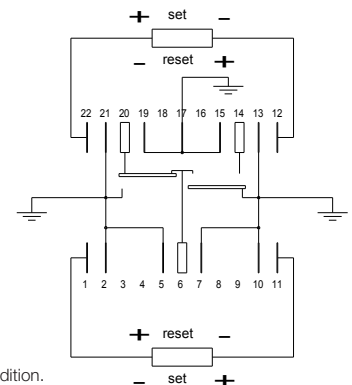


Contacts are shown in reset condition.  
Contact position might change during transportation and must be reset before use.


## HF3 Relay (Continued)

### PCB layout

TOP view on component side of PCB

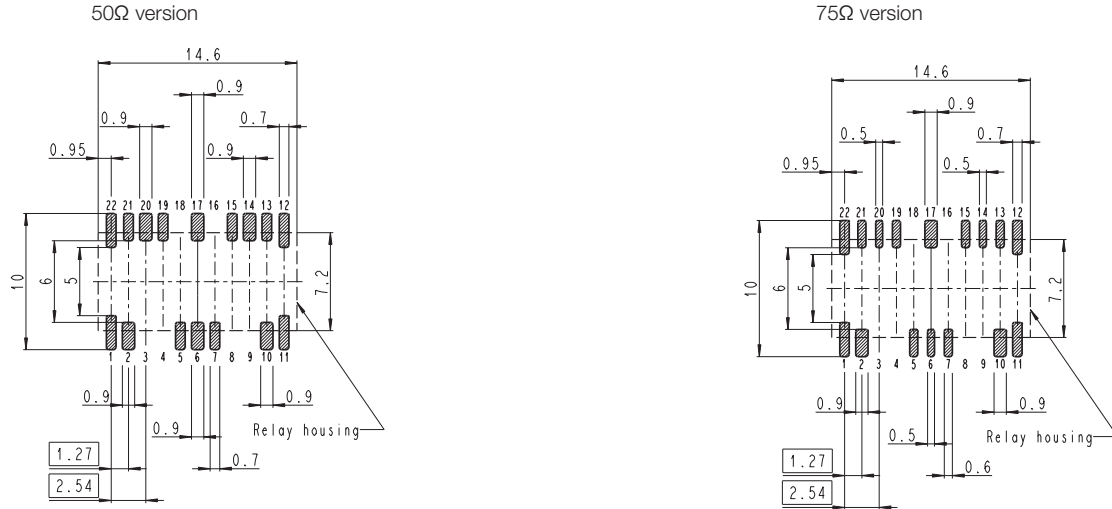

### Dimensions

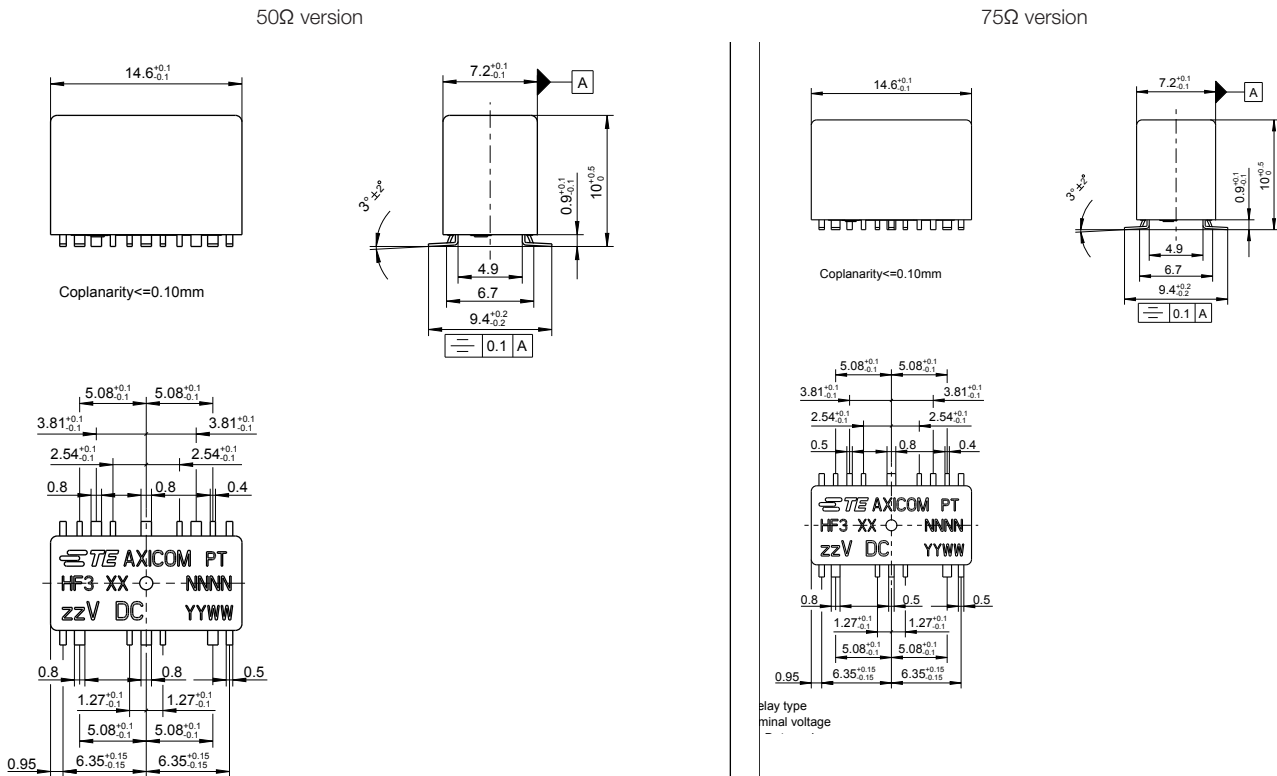

## 5

## HF3 Relay (Continued)

### Product code structure

Typical product code **HF3** **53**

|             |                               |                                                                    |                               |
|-------------|-------------------------------|--------------------------------------------------------------------|-------------------------------|
| <b>Type</b> |                               | <b>HF3</b> Signal Relays HF3 Series<br>1 form C, 1 CO              |                               |
| <b>Coil</b> |                               | Coil code: please refer to coil versions table<br>Performance type |                               |
| <b>5x</b>   | 50Ω version, monostable 1coil | <b>0x</b>                                                          | 75Ω version, monostable 1coil |
| <b>7x</b>   | 50Ω version, bistable 1coil   | <b>2x</b>                                                          | 75Ω version, bistable 1coil   |
| <b>9x</b>   | 50Ω version, bistable 2coils  | <b>4x</b>                                                          | 75Ω version, bistable 2coils  |

| Product code | Arrangement     | Version | Coil   | Coil type        | Part number |
|--------------|-----------------|---------|--------|------------------|-------------|
| HF3 51       | 1 form C (1 CO) | 50ohm   | 3VDC   | Monostable       | 1462051-1   |
| HF3 52       |                 |         | 4.5VDC |                  | 1-1462051-6 |
| HF3 53       |                 |         | 5VDC   |                  | 1462051-2   |
| HF3 54       |                 |         | 6VDC   |                  | 1-1462051-7 |
| HF3 55       |                 |         | 9VDC   |                  | 1462051-3   |
| HF3 56       |                 |         | 12VDC  |                  | 1462051-4   |
| HF3 57       |                 |         | 24VDC  |                  | 1462051-5   |
| HF3 71       | 1 form C (1 CO) | 50ohm   | 3VDC   | Bistable 1 coil  | 1462051-6   |
| HF3 72       |                 |         | 4.5VDC |                  | 1-1462051-8 |
| HF3 73       |                 |         | 5VDC   |                  | 1462051-7   |
| HF3 76       |                 |         | 12VDC  |                  | 1462051-9   |
| HF3 91       | 1 form C (1 CO) | 50ohm   | 3VDC   | Bistable 2 coils | 1-1462051-1 |
| HF3 92       |                 |         | 4.5VDC |                  | 2-1462051-0 |
| HF3 93       |                 |         | 5VDC   |                  | 1-1462051-2 |
| HF3 95       |                 |         | 9VDC   |                  | 1-1462051-3 |
| HF3 96       |                 |         | 12VDC  |                  | 1-1462051-4 |
| HF3 97       |                 |         | 24VDC  |                  | 1-1462051-5 |
| HF3 01       | 1 form C (1 CO) | 75ohm   | 3VDC   | Monostable       | 1462050-1   |
| HF3 02       |                 |         | 4.5VDC |                  | 1-1462050-6 |
| HF3 03       |                 |         | 5VDC   |                  | 1462050-2   |
| HF3 06       |                 |         | 12VDC  |                  | 1462050-4   |
| HF3 07       |                 |         | 24VDC  |                  | 1462050-5   |
| HF3 21       | 1 form C (1 CO) | 75ohm   | 3VDC   | Bistable 1 coil  | 1462050-6   |
| HF3 23       |                 |         | 5VDC   |                  | 1462050-7   |
| HF3 26       |                 |         | 12VDC  |                  | 1462050-9   |
| HF3 41       | 1 form C (1 CO) | 75ohm   | 3VDC   | Bistable 2 coils | 1-1462050-1 |
| HF3 43       |                 |         | 5VDC   |                  | 1-1462050-2 |
| HF3 46       |                 |         | 12VDC  |                  | 1-1462050-4 |
| HF3 47       |                 |         | 24VDC  |                  | 1-1462050-5 |

This list represents the most common types and does not show all variants covered by this data sheet.

Other types on request



## О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

**Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.**

### **Наша компания это:**

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (XC), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

## Перечень производителей, продукцию которых мы поставляем на российский рынок





Trade Electronics.ru

гарантия бесперебойности производства и  
качества выпускаемой продукции

С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

<http://www.tradeelectronics.ru/>