


ISOLATED DC/DC CONVERTERS

48 Vdc Input, 3.3 Vdc/2 A, 5 Vdc/2 A, 12 Vdc/1 A, 24 Vdc/0.5 A Output

bel
POWER PRODUCTS

0RLC-10Txxx Series RoHS Compliant Rev.A

- Isolated
- Fixed Frequency
- High Power Density
- High Efficiency
- Output Over-Voltage Shutdown
- Safety Approval to UL60950-1 (Pending)
- Low Cost
- Trim
- OCP/SCP
- Remote On/Off
- Active Low/High (Option)

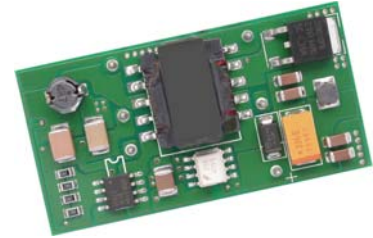

Description

The 0RLC-10T Series are isolated dc/dc converters that operate from a nominal 48 Vdc source. These units will provide up to 12 W of output power from a nominal 48 Vdc input. These units are designed to be highly efficient and very low cost. Features include remote on/off, over current protection and short circuit protection. These converters are provided in an industry standard package.

Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Model Number Active High	Model Number Active Low
3.3 Vdc	36 Vdc - 75 Vdc	2 A	6.6 W	77%	0RLC-10T033	0RLC-10T03L
5.0 Vdc	36 Vdc - 75 Vdc	2 A	10 W	82%	0RLC-10T050	0RLC-10T05L
12 Vdc	36 Vdc - 75 Vdc	1 A	12 W	83%	0RLC-10T120	0RLC-10T12L
24 Vdc	36 Vdc - 75 Vdc	0.5 A	12 W	85%	0RLC-10T240	0RLC-10T24L

- Notes:** 1. Add "G" suffix at the end of the model number to indicate Tray Packaging.
2. All part numbers above indicate RoHS 6. Change the second letter "R" to "7" for RoHS 5 part numbers.

Absolute Maximum Ratings

Parameter	Min	Typ	Max	Notes
Continuous Input Voltage	-0.3 V	-	75 V	
Peak/Surge Input Voltage	-0.3 V	-	100 V	Transients of 100 ms or less in duration
Remote On/Off (Active Low)	-0.3 V	-	18 V	
Remote On/Off (Active High)	-0.3 V	-	7 V	
Ambient Temperature	0 °C	-	70 °C	
Storage Temperature	-40 °C	-	125 °C	

Input Specifications

Parameter	Min	Typ	Max	Notes
Input Voltage	36 V	-	75 V	
Input Current (no load)	-	-	40 mA	
Input Current (full load)	-	-	0.45 A	
Remote Off Input Current (Active Low)	-	5 mA	10 mA	
Remote Off Input Current (Active High)	-	-	10 mA	
Input Reflected Ripple Current (pk-pk)	-	15 mA	30 mA	With simulated source impedance of 10 uH, 5 Hz to 20 MHz; use a 47uF/100 V electrolytic capacitor with ESR = 1 ohm max. at 200 kHz at 25 °C.
Input Reflected Ripple Current (rms)	-	5 mA	10 mA	
I ² t Inrush Current Transient	-	0.039 A ² s	0.062 A ² s	
Turn-on Voltage Threshold	-	30 V	-	

Note: All specifications are typical at nominal input, full load at 25 °C unless otherwise stated.

ISOLATED DC/DC CONVERTERS

48 Vdc Input, 3.3 Vdc/2 A, 5 Vdc/2 A, 12 Vdc/1 A, 24 Vdc/0.5 A Output



Output Specifications

Parameter	Min	Typ	Max	Notes
Output Voltage Set Point				Vin=48 V for all outputs
Vo=3.3 V	3.201 V	3.30 V	3.399 V	
Vo=5.0 V	4.850 V	5.00 V	5.150 V	
Vo=12 V	11.64 V	12.00 V	12.36 V	
Vo=24 V	23.28 V	24.00 V	24.72 V	
Line Regulation				
Vo=3.3 V	-	5 mV	10 mV	
Vo=5.0 V	-	10 mV	15 mV	
Vo=12 V	-	20 mV	36 mV	
Vo=24 V	-	35 mV	48 mV	
Load Regulation				
Vo=3.3 V	-	10 mV	15 mV	
Vo=5.0 V	-	15 mV	25 mV	
Vo=12 V	-	36 mV	60 mV	
Vo=24 V	-	48 mV	80 mV	
Regulation Over Temperature (0 °C to 70 °C)	-	75 mV	150mV	
Output Current				
Vo=3.3 V	0.2 A	-	2.0 A	
Vo=5.0 V	0.2 A	-	2.0 A	
Vo=12 V	0.1 A	-	1.0 A	
Vo=24 V	0.05 A	-	0.5 A	
Current Limit Threshold				
Vo=3.3 V	-	3.0 A	-	
Vo=5.0 V	-	3.0 A	-	
Vo=12 V	-	1.5 A	-	
Vo=24 V	-	0.75 A	-	
Short Circuit Surge Transient	-	TBD	-	A ² s
Ripple and Noise (rms)				0 - 20 MHz BW , with 1 uF ceramic load capacitance
Vo=3.3 V	-	10 mV	15 mV	
Vo=5.0 V	-	18 mV	30 mV	
Vo=12 V	-	21 mV	40 mV	
Vo=24 V	-	45 mV	70 mV	
Ripple and Noise (pk-pk)				
Vo=3.3 V	-	40 mV	60 mV	
Vo=5.0 V	-	60 mV	100 mV	
Vo=12 V	-	80 mV	120 mV	
Vo=24 V	-	120 mV	180 mV	
Turn on Time				
Power On	-	-	200 mS	
Remote On	0.5 mS	-	40 mS	
Overshoot at Turn on	-	0%	3%	
Output Capacitance				
Vo=3.3 V	0 uF	-	800 uF	
Vo=5.0 V	0 uF	-	800 uF	
Vo=12 V	0 uF	-	100 uF	
Vo=24 V	0 uF	-	20 uF	

ISOLATED DC/DC CONVERTERS

48 Vdc Input, 3.3 Vdc/2 A, 5 Vdc/2 A, 12 Vdc/1 A, 24 Vdc/0.5 A Output



Output Specifications (continued)

Parameter			Min	Typ	Max	Notes
Transient Response						
50% ~ 100% Max Load	Overshoot	Vo=3.3 V	-	100 mV	150 mV	di/dt = 0.1 A/uS; Vin = 48 V; Ta = 25 °C and 1 uF ceramic capacitor
	Settling Time		-	200 uS	300 uS	
100% ~ 50% Max Load	Overshoot		-	100 mV	150 mV	
	Settling Time		-	200 uS	300 uS	
50% ~ 100% Max Load	Overshoot	Vo=5.0 V	-	100 mV	150 mV	
	Settling Time		-	100 uS	150 uS	
100% ~ 50% Max Load	Overshoot		-	100 mV	150 mV	
	Settling Time		-	100 uS	150 uS	
50% ~ 100% Max Load	Overshoot	Vo=12 V	-	150 mV	250 mV	
	Settling Time		-	150 uS	200 uS	
100% ~ 50% Max Load	Overshoot		-	150 mV	250 mV	
	Settling Time		-	150 uS	200 uS	
50% ~ 100% Max Load	Overshoot	Vo=24 V	-	350 mV	500 mV	
	Settling Time		-	200 uS	250 uS	
100% ~ 50% Max Load	Overshoot		-	350 mV	500 mV	
	Settling Time		-	200 uS	250 uS	

Note: All specifications are typical at nominal input, full load at 25 °C unless otherwise stated.

General Specifications

Parameter	Min	Typ	Max	Notes
Efficiency Vo=3.3 V Vo=5.0 V Vo=12 V Vo=24 V	73% 78% 79% 81%	77% 82% 83% 85%	- - - -	Vin=48 V, Io= Iomax
Switching Frequency	200 kHz	250 kHz	300 kHz	
Output Trim Range	95%Vo	-	105%Vo	For all outputs
MTBF	TBD			Calculated Per Bell Core SR-332 (Io = Nomal; Ta = 25 °C)
Dimensions Inches (L × W × H) Millimeters (L × W × H)	1.91 x 0.98 x 0.477 48.51 x 24.89 x 12.12			
Weight	-	10.3 g	-	

Note: All specifications are typical at 25 °C unless otherwise stated.

Control Specifications

Parameter		Min	Typ	Max	Notes
Remote On/Off					
Signal Low (Unit On)	Active Low	-0.3 V	-	0.8 V	The remote on/off pin open, Unit On.
Signal High (Unit Off)		3.5 V	-	18 V	
Signal Low (Unit Off)	Active High	-0.3 V	-	0.8 V	
Signal High (Unit On)		3.5 V	-	7 V	

ISOLATED DC/DC CONVERTERS

48 Vdc Input, 3.3 Vdc/2 A, 5 Vdc/2 A, 12 Vdc/1 A, 24 Vdc/0.5 A Output





Output Trim Equations

Equations for calculating the trim resistor (in kΩ) given the desired adjusted voltage (V_{adj}) and the nominal output voltage of the converter (V_{nom}) are shown below. The Trim Down resistor should be connected between the Trim pin and Vout. The Trim Up resistor should be connected between the Trim pin and Ground. Only one of the resistors should be used for any given application.


$$R_{TrimDown} = \frac{A}{V_{nom} - V_{adj}} - B$$

$$R_{TrimUp} = \frac{C}{V_{adj} - V_{nom}} - D$$




Vnom	A	B	C	D
24	489.490	28.310	26.660	6.810
12	113.550	16.990	13.020	6.490
5.0	56.410	51.200	18.228	36.500
3.3	21.628	75.400	13.020	64.900


Efficiency Data

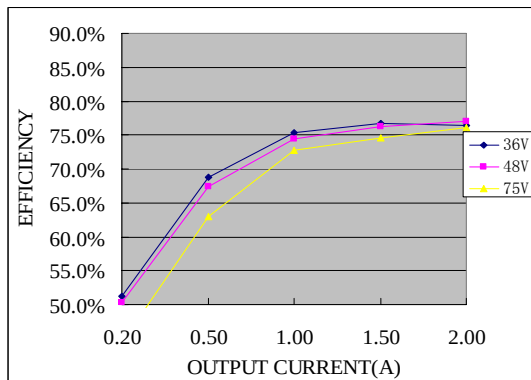


ORLC-10T033

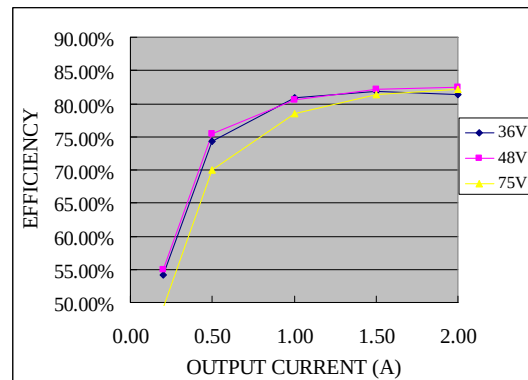

ORLC-10T050

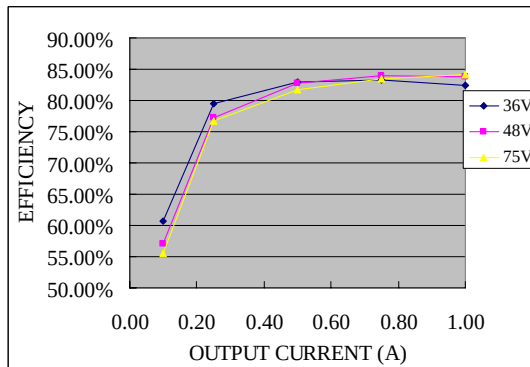

ORLC-10T120

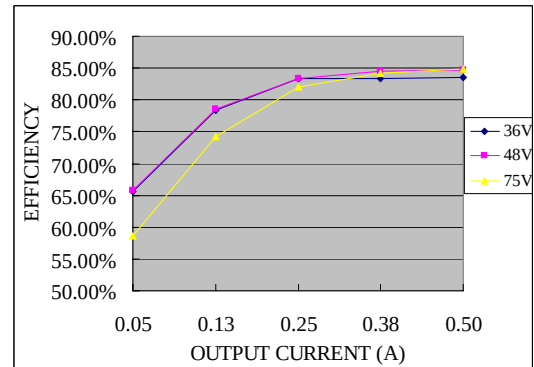


ORLC-10T240

ISOLATED DC/DC CONVERTERS


48 Vdc Input, 3.3 Vdc/2 A, 5 Vdc/2 A, 12 Vdc/1 A, 24 Vdc/0.5 A Output

bel
POWER PRODUCTS


Thermal Derating Curves

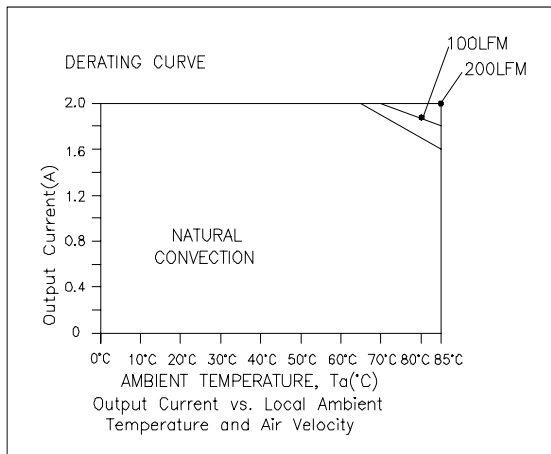


$V_o=3.3\text{ V}$, $I_o=2\text{ A}$

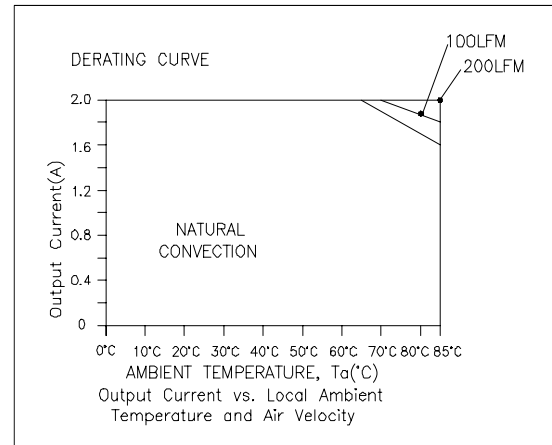

$V_o=5\text{ V}$, $I_o=2\text{ A}$

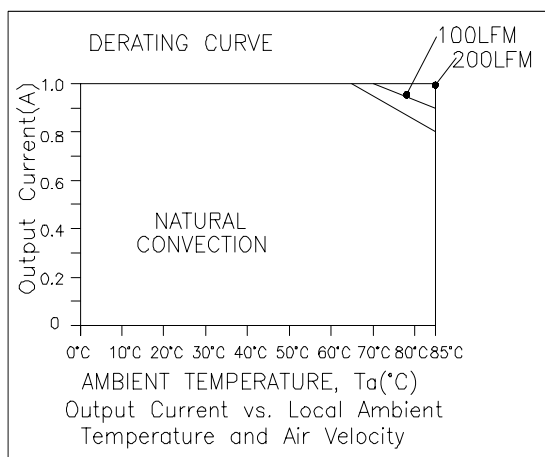

$V_o=12\text{ V}$, $I_o=1\text{ A}$

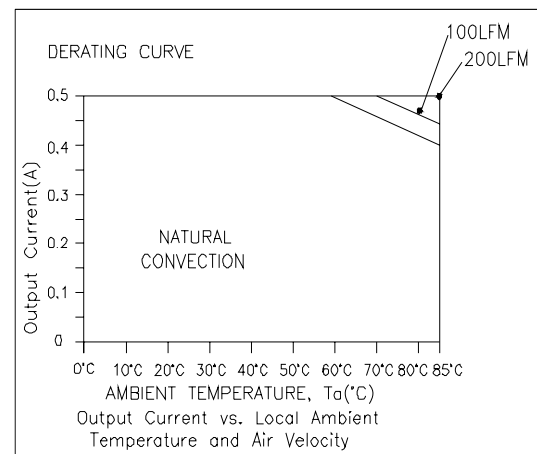


$V_o=24\text{ V}$, $I_o=0.5\text{ A}$

ISOLATED DC/DC CONVERTERS


48 Vdc Input, 3.3 Vdc/2 A, 5 Vdc/2 A, 12 Vdc/1 A, 24 Vdc/0.5 A Output

bel
POWER PRODUCTS


Ripple and Noise Waveforms

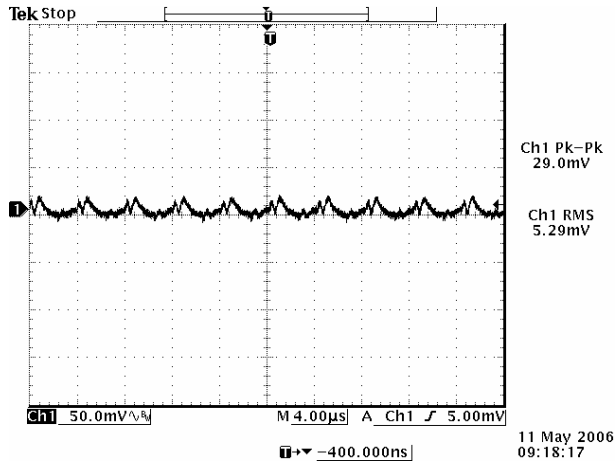


$V_o = 3.3\text{ V}$

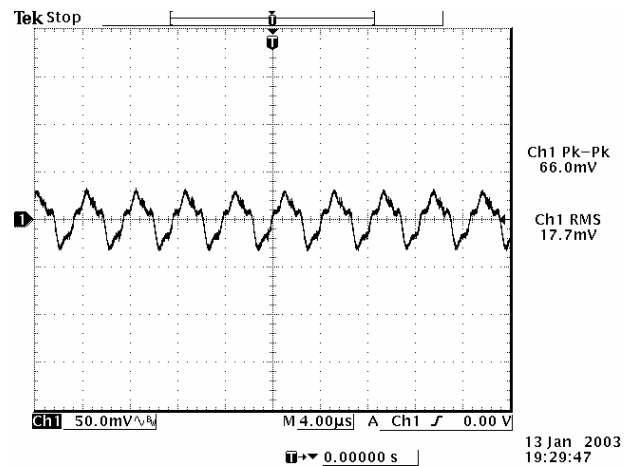

$V_o = 5.0\text{ V}$

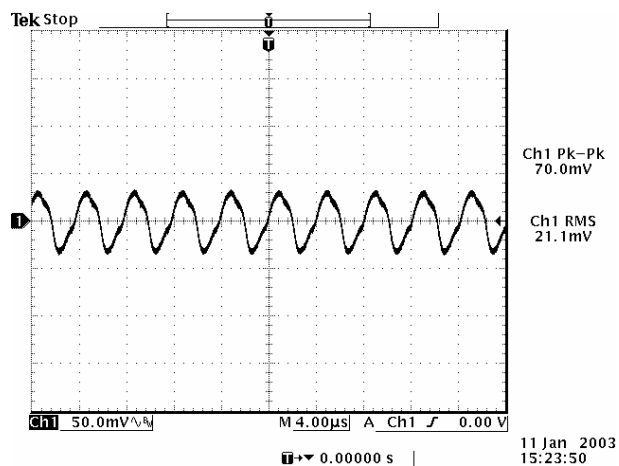

$V_o = 12\text{ V}$

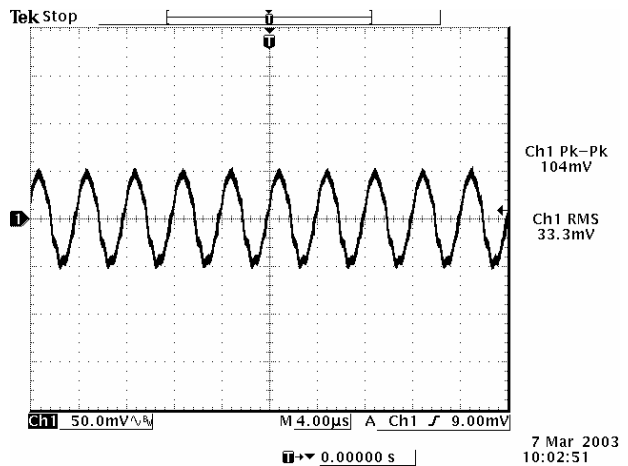

$V_o = 24\text{ V}$


Note: Ripple and noise at full load, 48 Vdc input, with a 1 μF ceramic capacitor at the output, and $T_a = 25\text{ deg C}$.

ISOLATED DC/DC CONVERTERS



48 Vdc Input, 3.3 Vdc/2 A, 5 Vdc/2 A, 12 Vdc/1 A, 24 Vdc/0.5 A Output

bel
POWER PRODUCTS


Transient Response Waveforms

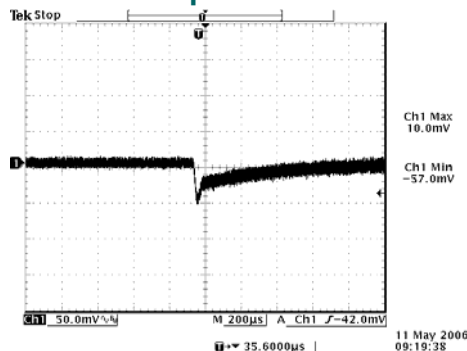


Vout=3.3 V 50% to 100% Load Transients

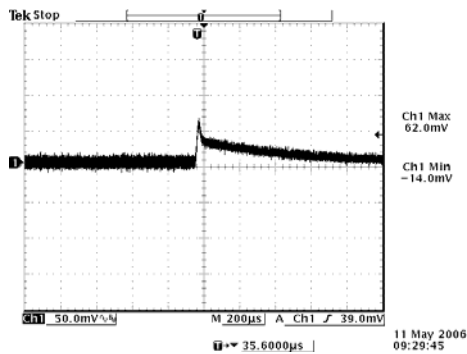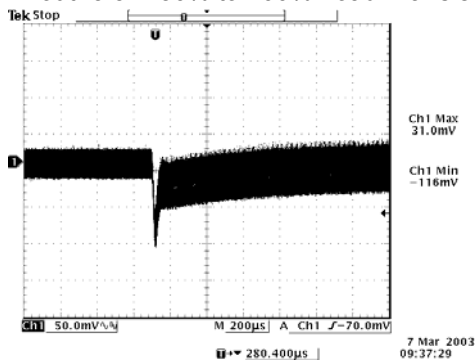


Vout=3.3 V 100% to 50% Load Transients

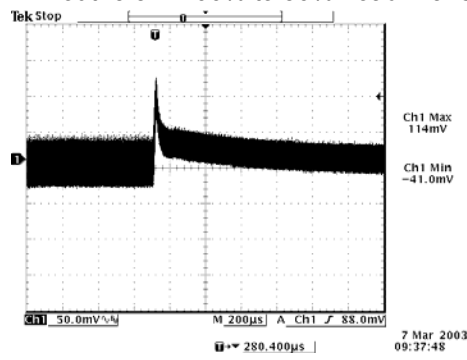


Vout=5.0 V 50% to 100% Load Transients

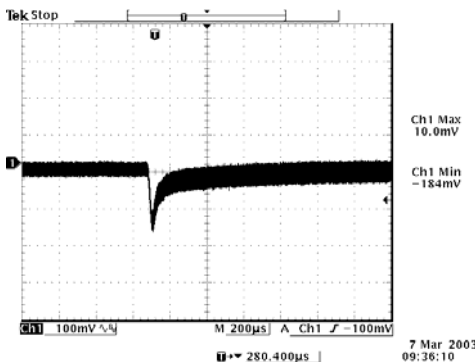


Vout=5.0 V 100% to 50% Load Transients

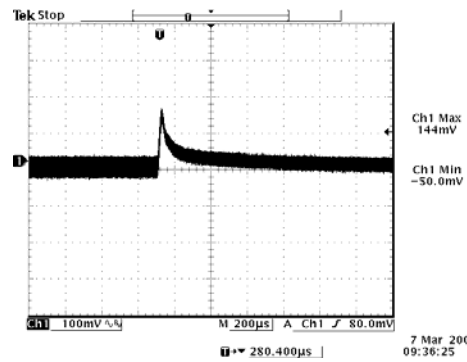

Vout=12 V 50% to 100% Load Transients

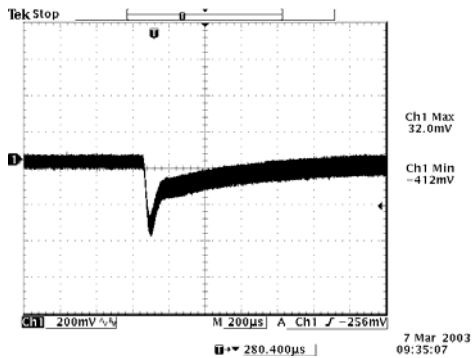

Vout=12 V 100% to 50% Load Transients

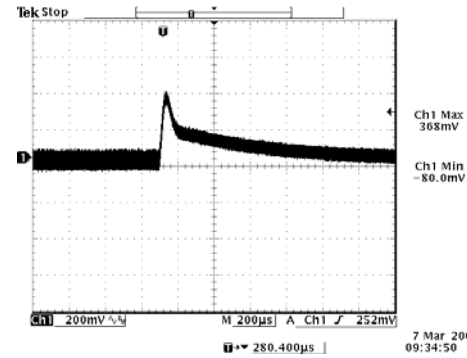

Vout=24 V 50% to 100% Load Transients

Vout=24 V 100% to 50% Load Transients



Note: Transient response at Vin=48 V, di/dt=0.1 A/μs, with external 1 μF ceramic capacitor, and Ta=25 deg C.

ISOLATED DC/DC CONVERTERS

48 Vdc Input, 3.3 Vdc/2 A, 5 Vdc/2 A, 12 Vdc/1 A, 24 Vdc/0.5 A Output




Mechanical Outline

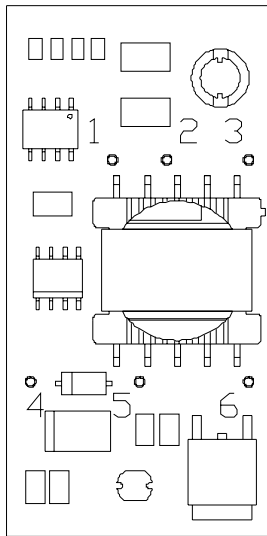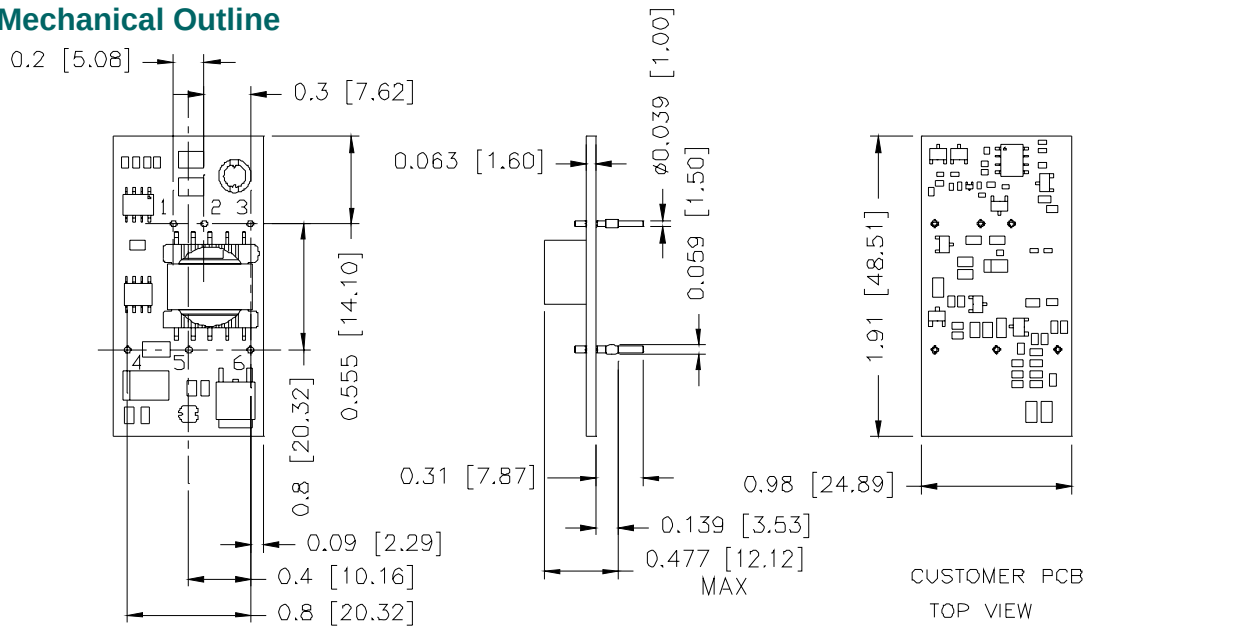

Pin Connections

Pin	Function
1	Vin+
2	Vin-
3	Enable
4	Vo+
5	Trim
6	Vo-

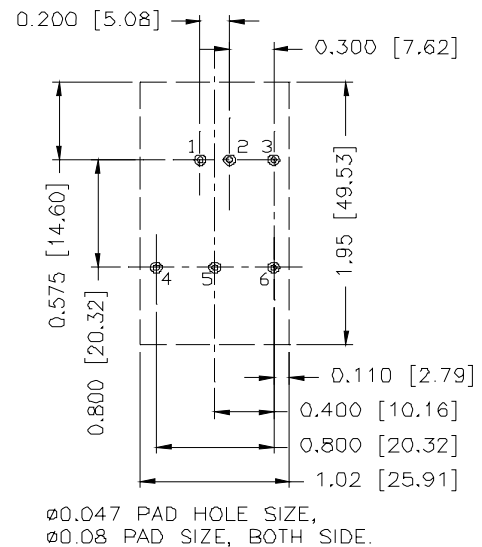

ø0.047 PAD HOLE SIZE,
ø0.08 PAD SIZE, BOTH SIDE.

RoHS Compliance

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products.



©2007 Bel Fuse Inc. Specifications subject to change without notice. 030207

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F/ 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com



О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.

Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (XC), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

Перечень производителей, продукцию которых мы поставляем на российский рынок





Trade Electronics.ru

гарантия бесперебойности производства и
качества выпускаемой продукции

С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

<http://www.tradeelectronics.ru/>