

# 74LCX04

## Low Voltage Hex Inverter with 5V Tolerant Inputs

### Features

- 5V tolerant inputs
- 2.3V–3.6V  $V_{CC}$  specifications provided
- 5.2ns  $t_{PD}$  max. ( $V_{CC} = 3.3V$ ), 10 $\mu$ A  $I_{CC}$  max.
- Power down high impedance inputs and outputs
- $\pm 24mA$  output drive ( $V_{CC} = 3.0V$ )
- Implements proprietary noise/EMI reduction circuitry
- Latch-up performance exceeds JEDEC 78 conditions
- ESD performance:
  - Human body model > 2000V
  - Machine model > 200V
- Leadless DQFN package

### General Description

The LCX04 contains six inverters. The inputs tolerate voltages up to 7V allowing the interface of 5V systems to 3V systems.

The 74LCX04 is fabricated with advanced CMOS technology to achieve high speed operation while maintaining CMOS low power dissipation.

### Ordering Information

| Order Number              | Package Number | Package Description                                                                         |
|---------------------------|----------------|---------------------------------------------------------------------------------------------|
| 74LCX04M                  | M14A           | 14-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150" Narrow                |
| 74LCX04SJ                 | M14D           | 14-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide                               |
| 74LCX04BQX <sup>(1)</sup> | MLP14A         | 14-Terminal Depopulated Quad Very-Thin Flat Pack No Leads (DQFN), JEDEC MO-241, 2.5 x 3.0mm |
| 74LCX04MTC                | MTC14          | 14-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide                 |

#### Note:

1. DQFN package available in Tape and Reel only.


Device also available in Tape and Reel. Specify by appending suffix letter "X" to the ordering number.




All packages are lead free per JEDEC: J-STD-020B standard.

## Connection Diagrams

### Pin Assignments for SOIC, SOP, and TSSOP

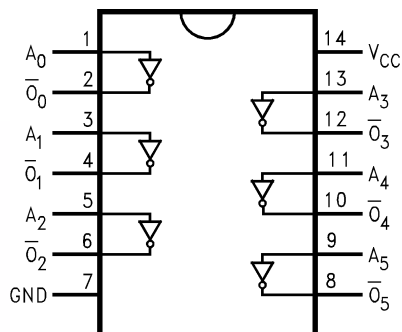


### Pad Assignments for DQFN



(Top View)

## Logic Symbol

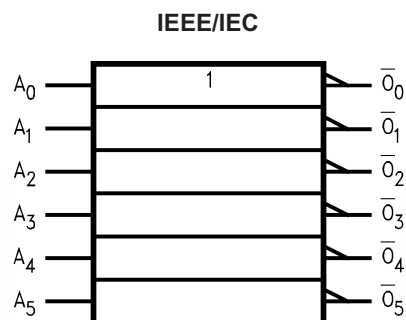

## Pin Description

| Pin Names   | Description |
|-------------|-------------|
| $A_n, B_n$  | Inputs      |
| $\bar{O}_n$ | Outputs     |

## Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

| Symbol    | Parameter                                                     | Rating                   |
|-----------|---------------------------------------------------------------|--------------------------|
| $V_{CC}$  | Supply Voltage                                                | −0.5V to +7.0V           |
| $V_I$     | DC Input Voltage                                              | −0.5V to +7.0V           |
| $V_O$     | DC Output Voltage, Output in HIGH or LOW State <sup>(2)</sup> | −0.5V to $V_{CC} + 0.5V$ |
| $I_{IK}$  | DC Input Diode Current, $V_I < GND$                           | −50mA                    |
| $I_{OK}$  | DC Output Diode Current<br>$V_O < GND$                        | −50mA                    |
|           | $V_O > V_{CC}$                                                | +50mA                    |
| $I_O$     | DC Output Source/Sink Current                                 | ±50mA                    |
| $I_{CC}$  | DC Supply Current per Supply Pin                              | ±100mA                   |
| $I_{GND}$ | DC Ground Current per Ground Pin                              | ±100mA                   |
| $T_{STG}$ | Storage Temperature                                           | −65°C to +150°C          |

**Note:**

2.  $I_O$  Absolute Maximum Rating must be observed.

## Recommended Operating Conditions<sup>(3)</sup>

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. Fairchild does not recommend exceeding them or designing to absolute maximum ratings.

| Symbol                | Parameter                                               | Min. | Max.     | Units |
|-----------------------|---------------------------------------------------------|------|----------|-------|
| $V_{CC}$              | Supply Voltage<br>Operating                             | 2.0  | 3.6      | V     |
|                       | Data Retention                                          | 1.5  | 3.6      |       |
| $V_I$                 | Input Voltage                                           | 0    | 5.5      | V     |
| $V_O$                 | Output Voltage, HIGH or LOW State                       | 0    | $V_{CC}$ | V     |
| $I_{OH} / I_{OL}$     | Output Current<br>$V_{CC} = 3.0V-3.6V$                  |      | ±24      | mA    |
|                       | $V_{CC} = 2.7V-3.0V$                                    |      | ±12      |       |
|                       | $V_{CC} = 2.3V-2.7V$                                    |      | ±8       |       |
| $T_A$                 | Free-Air Operating Temperature                          | −40  | 85       | °C    |
| $\Delta t / \Delta V$ | Input Edge Rate, $V_{IN} = 0.8V-2.0V$ , $V_{CC} = 3.0V$ | 0    | 10       | ns/V  |

**Note:**

3. Unused inputs must be held HIGH or LOW. They may not float.

## DC Electrical Characteristics

| Symbol           | Parameter                             | V <sub>CC</sub> (V) | Conditions                               | T <sub>A</sub> = -40°C to +85°C |      | Units |
|------------------|---------------------------------------|---------------------|------------------------------------------|---------------------------------|------|-------|
|                  |                                       |                     |                                          | Min.                            | Max. |       |
| V <sub>IH</sub>  | HIGH Level Input Voltage              | 2.3–2.7             |                                          | 1.7                             |      | V     |
|                  |                                       | 2.7–3.6             |                                          | 2.0                             |      |       |
| V <sub>IL</sub>  | LOW Level Input Voltage               | 2.3–2.7             |                                          |                                 | 0.7  | V     |
|                  |                                       | 2.7–3.6             |                                          |                                 | 0.8  |       |
| V <sub>OH</sub>  | HIGH Level Output Voltage             | 2.3–3.6             | I <sub>OH</sub> = -100μA                 | V <sub>CC</sub> - 0.2           |      | V     |
|                  |                                       | 2.3                 | I <sub>OH</sub> = -8mA                   | 1.8                             |      |       |
|                  |                                       | 2.7                 | I <sub>OH</sub> = -12mA                  | 2.2                             |      |       |
|                  |                                       | 3.0                 | I <sub>OH</sub> = -18mA                  | 2.4                             |      |       |
|                  |                                       |                     | I <sub>OH</sub> = -24mA                  | 2.2                             |      |       |
| V <sub>OL</sub>  | LOW Level Output Voltage              | 2.3–3.6             | I <sub>OL</sub> = 100μA                  |                                 | 0.2  | V     |
|                  |                                       | 2.3                 | I <sub>OL</sub> = 8mA                    |                                 | 0.6  |       |
|                  |                                       | 2.7                 | I <sub>OL</sub> = 12mA                   |                                 | 0.4  |       |
|                  |                                       | 3.0                 | I <sub>OL</sub> = 16mA                   |                                 | 0.4  |       |
|                  |                                       |                     | I <sub>OL</sub> = 24mA                   |                                 | 0.55 |       |
| I <sub>I</sub>   | Input Leakage Current                 | 2.3–3.6             | 0 ≤ V <sub>I</sub> ≤ 5.5V                |                                 | ±5.0 | μA    |
| I <sub>OFF</sub> | Power-Off Leakage Current             | 0                   | V <sub>I</sub> or V <sub>O</sub> = 5.5V  |                                 | 10   | μA    |
| I <sub>CC</sub>  | Quiescent Supply Current              | 2.3–3.6             | V <sub>I</sub> = V <sub>CC</sub> or GND  |                                 | 10   | μA    |
|                  |                                       |                     | 3.6V ≤ V <sub>I</sub> ≤ 5.5V             |                                 | ±10  |       |
| ΔI <sub>CC</sub> | Increase in I <sub>CC</sub> per Input | 2.3–3.6             | V <sub>IH</sub> = V <sub>CC</sub> - 0.6V |                                 | 500  | μA    |

## AC Electrical Characteristics

| Symbol                                | Parameter                            | T <sub>A</sub> = −40°C to +85°C, R <sub>L</sub> = 500Ω  |      |                                                  |      |                                                         |      | Units |
|---------------------------------------|--------------------------------------|---------------------------------------------------------|------|--------------------------------------------------|------|---------------------------------------------------------|------|-------|
|                                       |                                      | V <sub>CC</sub> = 3.3V ± 0.3V,<br>C <sub>L</sub> = 50pF |      | V <sub>CC</sub> = 2.7V,<br>C <sub>L</sub> = 50pF |      | V <sub>CC</sub> = 2.5V ± 0.2V,<br>C <sub>L</sub> = 30pF |      |       |
|                                       |                                      | Min.                                                    | Max. | Min.                                             | Max. | Min.                                                    | Max. |       |
| t <sub>PHL</sub> , t <sub>PLH</sub>   | Propagation Delay                    | 1.5                                                     | 5.2  | 1.5                                              | 6.0  | 1.5                                                     | 6.2  | ns    |
| t <sub>OSHL</sub> , t <sub>OSLH</sub> | Output to Output Skew <sup>(4)</sup> |                                                         | 1.0  |                                                  |      |                                                         |      | ns    |

## Note:

4. Skew is defined as the absolute value of the difference between the actual propagation delay for any two separate outputs of the same device. The specification applies to any outputs switching in the same direction, either HIGH-to-LOW (t<sub>OSHL</sub>) or LOW-to-HIGH (t<sub>OSLH</sub>).

**Dynamic Switching Characteristics**

| Symbol    | Parameter                            | $V_{CC}$ (V) | Conditions                                                           | $T_A = 25^\circ\text{C}$ | Unit |
|-----------|--------------------------------------|--------------|----------------------------------------------------------------------|--------------------------|------|
|           |                                      |              |                                                                      | Typical                  |      |
| $V_{OLP}$ | Quiet Output Dynamic Peak $V_{OL}$   | 3.3          | $C_L = 50\text{pF}$ , $V_{IH} = 3.3\text{V}$ , $V_{IL} = 0\text{V}$  | 0.8                      | V    |
|           |                                      | 2.5          | $C_L = 30\text{pF}$ , $V_{IH} = 2.5\text{V}$ , $V_{IL} = 0\text{V}$  | 0.6                      |      |
| $V_{OLV}$ | Quiet Output Dynamic Valley $V_{OL}$ | 3.3          | $C_L = 50\text{ pF}$ , $V_{IH} = 3.3\text{V}$ , $V_{IL} = 0\text{V}$ | -0.8                     | V    |
|           |                                      | 2.5          | $C_L = 30\text{ pF}$ , $V_{IH} = 2.5\text{V}$ , $V_{IL} = 0\text{V}$ | -0.6                     |      |

**Capacitance**

| Symbol    | Parameter                     | Conditions                                                                  | Typical | Units |
|-----------|-------------------------------|-----------------------------------------------------------------------------|---------|-------|
| $C_{IN}$  | Input Capacitance             | $V_{CC} = \text{Open}$ , $V_I = 0\text{V}$ or $V_{CC}$                      | 7       | pF    |
| $C_{OUT}$ | Output Capacitance            | $V_{CC} = 3.3\text{V}$ , $V_I = 0\text{V}$ or $V_{CC}$                      | 8       | pF    |
| $C_{PD}$  | Power Dissipation Capacitance | $V_{CC} = 3.3\text{V}$ , $V_I = 0\text{V}$ or $V_{CC}$ , $f = 10\text{MHz}$ | 25      | pF    |






## Tape and Reel Specification

### Tape Format for DQFN

| Package Designator | Tape Section       | Number of Cavities | Cavity Status | Cover Tape Status |
|--------------------|--------------------|--------------------|---------------|-------------------|
| BQX                | Leader (Start End) | 125 (Typ.)         | Empty         | Sealed            |
|                    | Carrier            | 3000               | Filled        | Sealed            |
|                    | Trailer (Hub End)  | 75 (Typ.)          | Empty         | Sealed            |

### Tape Dimensions inches (millimeters)

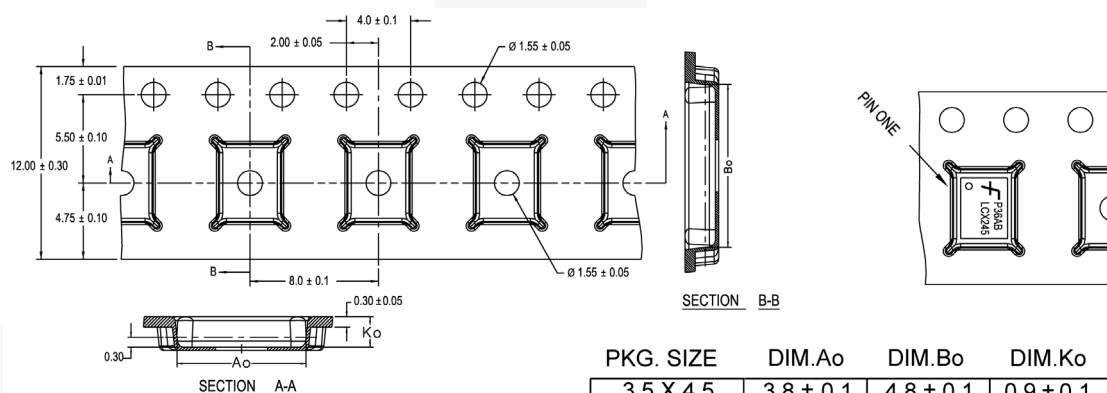


| PKG. SIZE | DIM.Ao    | DIM.Bo    | DIM.Ko    |
|-----------|-----------|-----------|-----------|
| 3.5 X 4.5 | 3.8 ± 0.1 | 4.8 ± 0.1 | 0.9 ± 0.1 |
| 3.0 X 3.0 | 3.3 ± 0.1 | 3.3 ± 0.1 | 0.9 ± 0.1 |
| 2.5 X 4.5 | 2.8 ± 0.1 | 4.8 ± 0.1 | 0.9 ± 0.1 |
| 2.5 X 3.5 | 2.8 ± 0.1 | 3.8 ± 0.1 | 0.9 ± 0.1 |
| 2.5 X 3.0 | 2.8 ± 0.1 | 3.3 ± 0.1 | 0.9 ± 0.1 |
| 2.5 X 2.5 | 2.8 ± 0.1 | 2.8 ± 0.1 | 0.9 ± 0.1 |

DIMENSIONS ARE IN MILLIMETERS

NOTES: unless otherwise specified

1. Cumulative pitch for feeding holes and cavities (chip pockets) not to exceed 0.008[0.20] over 10 pitch span.
2. Smallest allowable bending radius.
3. Thru hole inside cavity is centered within cavity.
4. Tolerance is  $\pm 0.002[0.05]$  for these dimensions on all 12mm tapes.
5. Ao and Bo measured on a plane 0.120[0.30] above the bottom of the pocket.
6. Ko measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
7. Pocket position relative to sprocket hole measured as true position of pocket. Not pocket hole.
8. Controlling dimension is millimeter. Dimension in inches rounded.

### Reel Dimensions inches (millimeters)

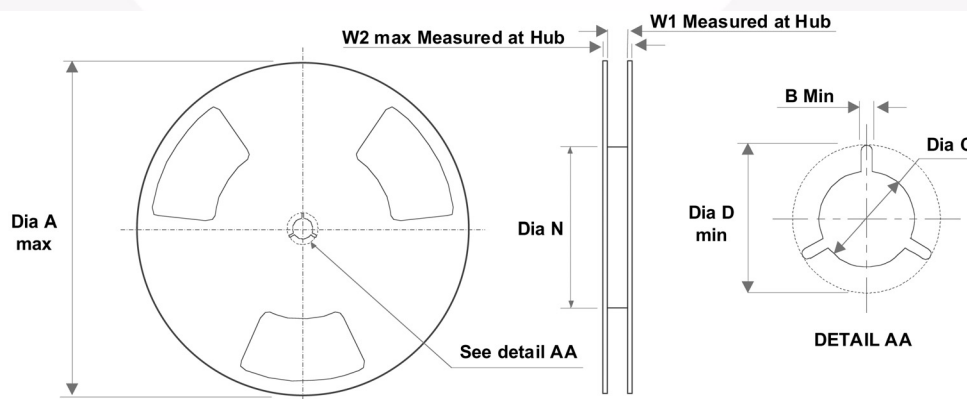

| Tape Size | A            | B            | C             | D             | N             | W1           | W2           |
|-----------|--------------|--------------|---------------|---------------|---------------|--------------|--------------|
| 12mm      | 13.0 (330.0) | 0.059 (1.50) | 0.512 (13.00) | 0.795 (20.20) | 2.165 (55.00) | 0.488 (12.4) | 0.724 (18.4) |

## Physical Dimensions

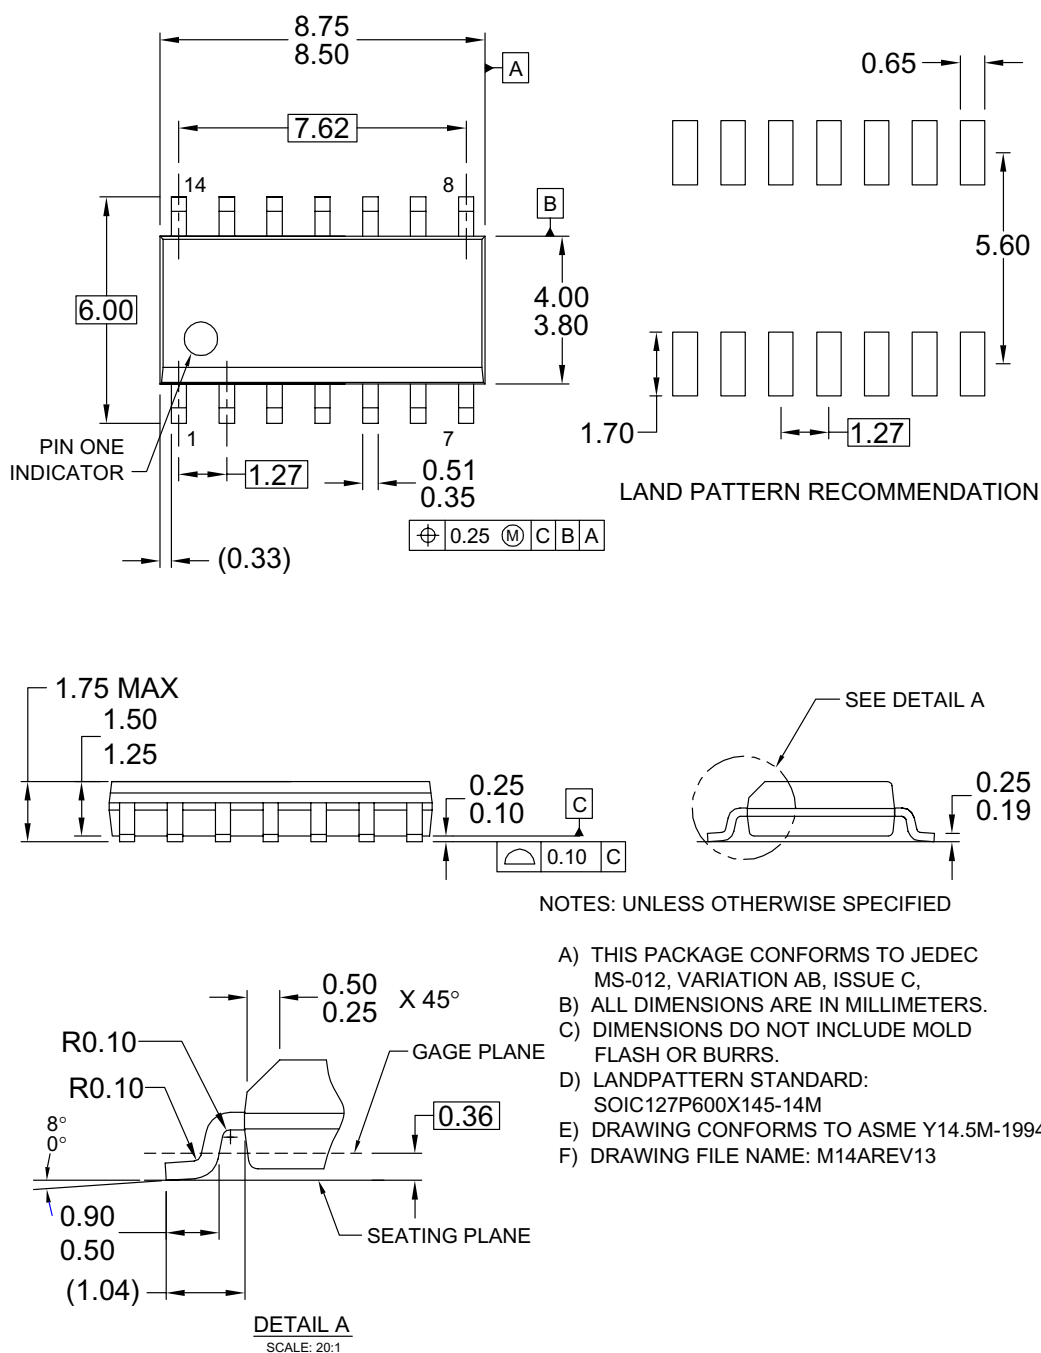



Figure 3. 14-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150" Narrow

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:

<http://www.fairchildsemi.com/packaging/>

## Physical Dimensions (Continued)

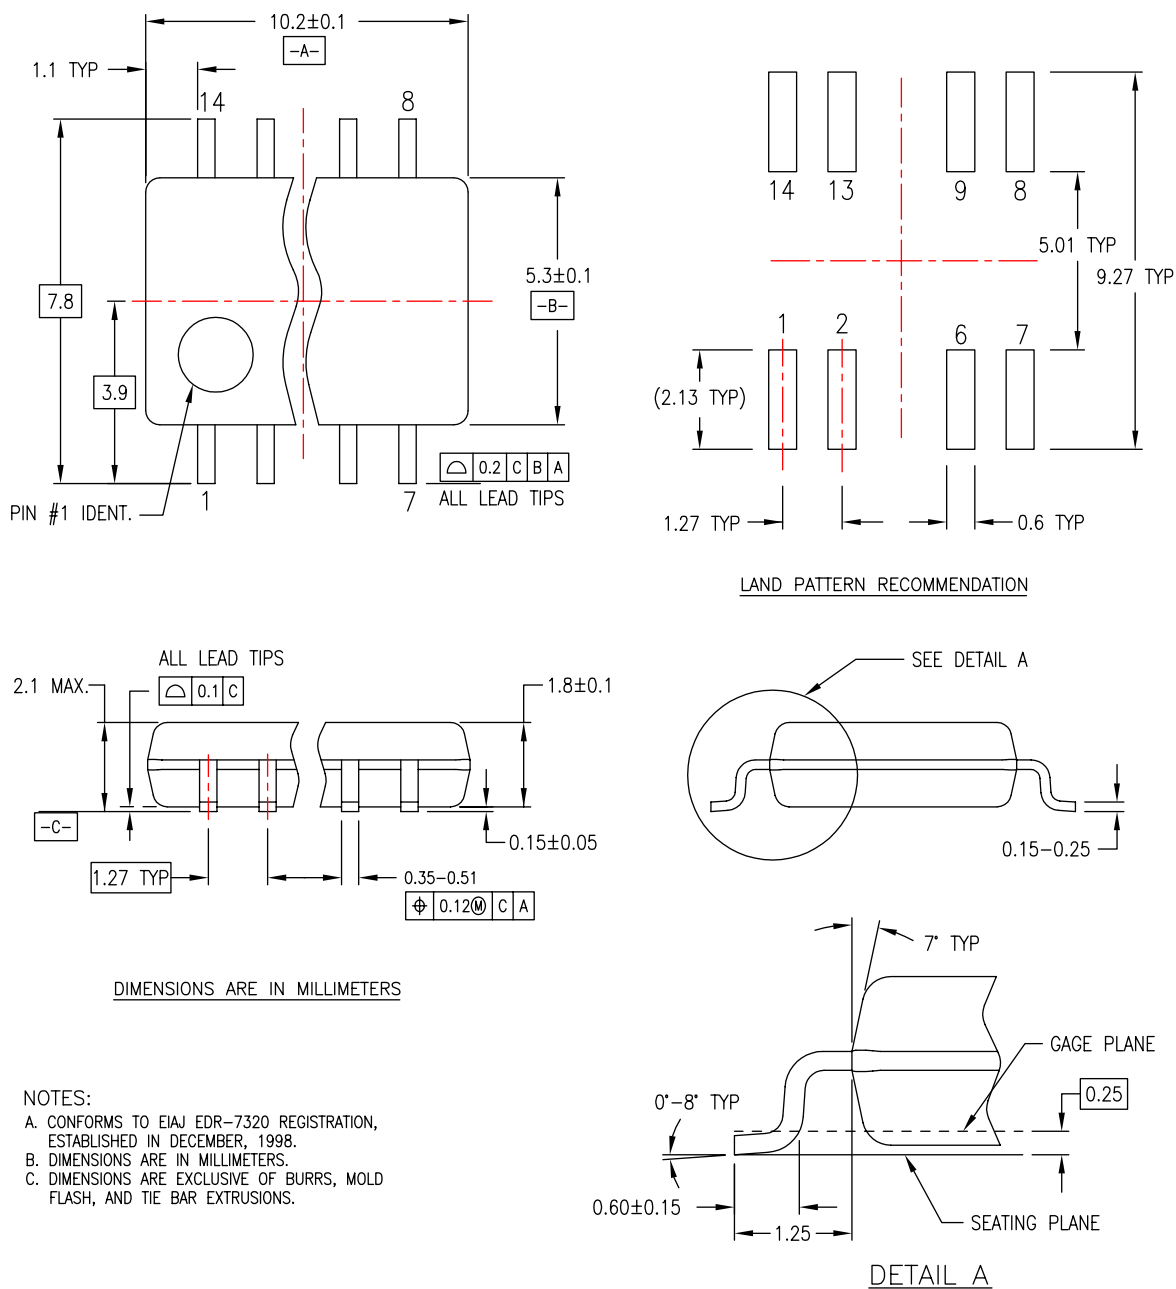

M14DREVC


Figure 4. 14-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:

<http://www.fairchildsemi.com/packaging/>

## Physical Dimensions (Continued)

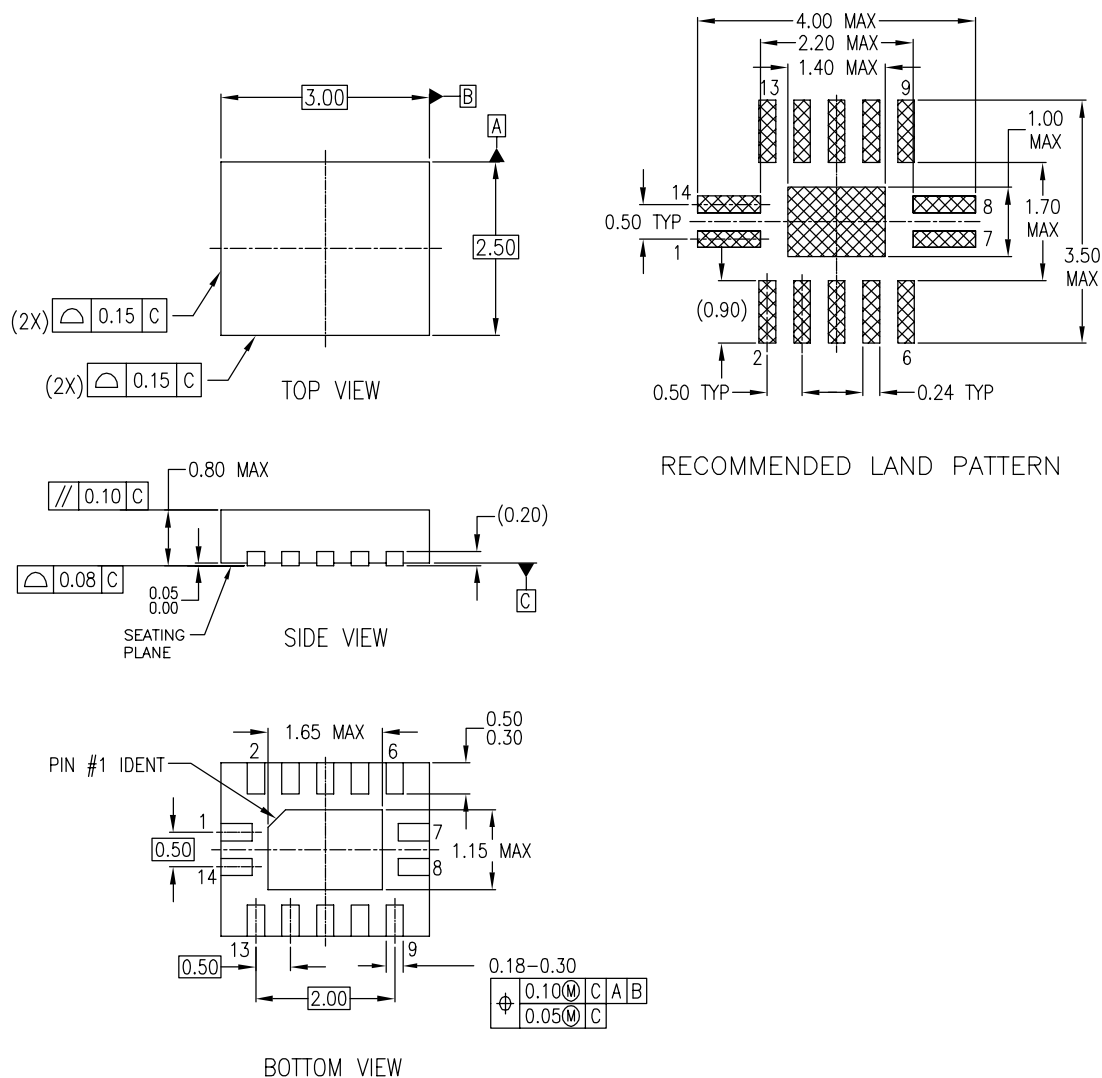

## NOTES:

- CONFORMS TO JEDEC REGISTRATION MO-241, VARIATION AA
- DIMENSIONS ARE IN MILLIMETERS.
- DIMENSIONS AND TOLERANCES PER ASME Y14.5M, 1994

MLP14ArevA


**Figure 5. 14-Terminal Depopulated Quad Very-Thin Flat Pack No Leads (DQFN), JEDEC MO-241, 2.5 x 3.0mm**

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:

<http://www.fairchildsemi.com/packaging/>

## Physical Dimensions (Continued)

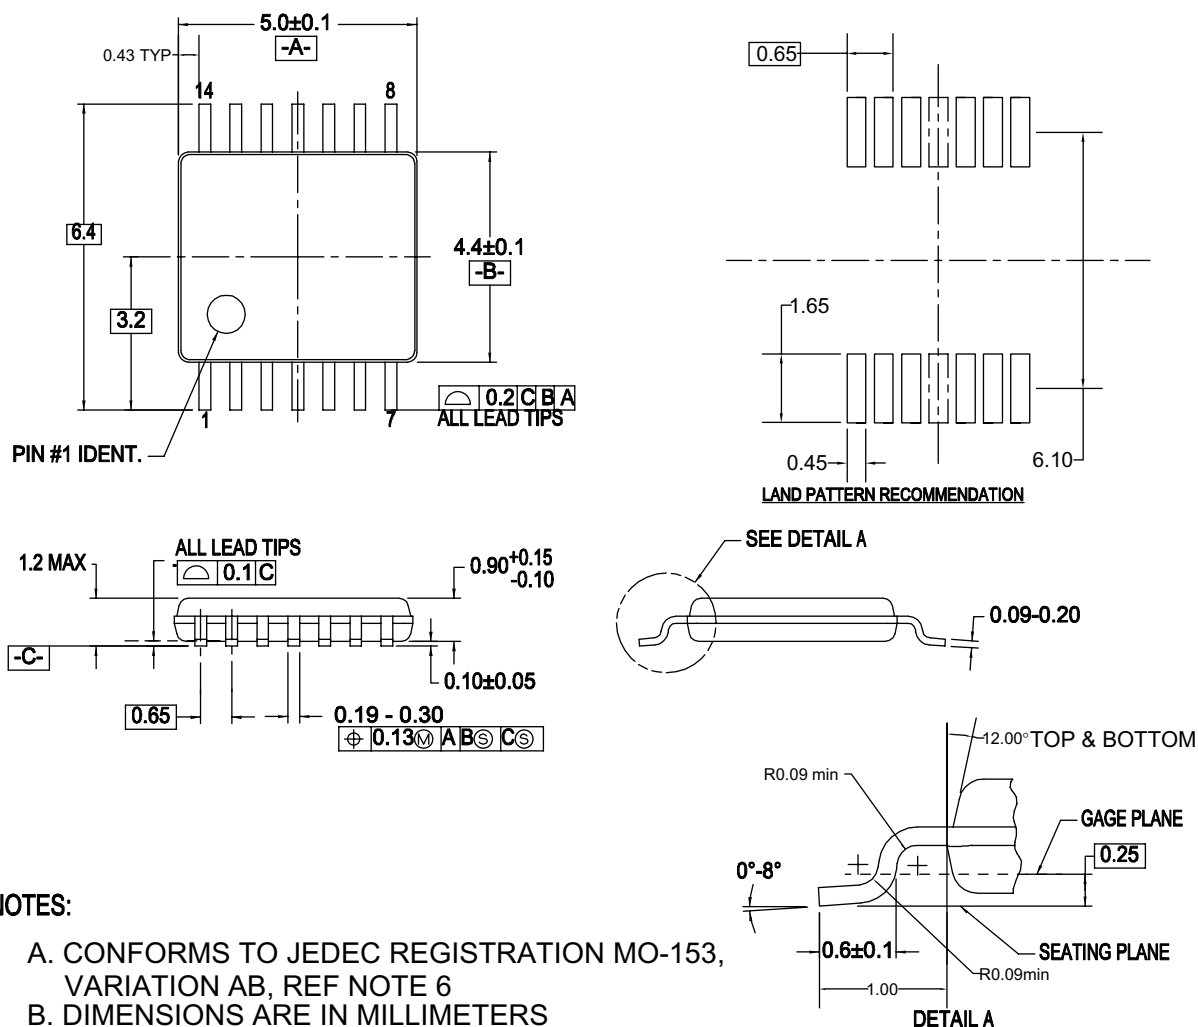

## NOTES:

- A. CONFORMS TO JEDEC REGISTRATION MO-153, VARIATION AB, REF NOTE 6
- B. DIMENSIONS ARE IN MILLIMETERS
- C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS
- D. DIMENSIONING AND TOLERANCES PER ANSI Y14.5M, 1982
- E. LANDPATTERN STANDARD: SOP65P640X110-14M
- F. DRAWING FILE NAME: MTC14REV6

Figure 6. 14-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:

<http://www.fairchildsemi.com/packaging/>



## TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

|                                                                                     |                        |                            |                      |
|-------------------------------------------------------------------------------------|------------------------|----------------------------|----------------------|
| ACEx®                                                                               | FPS™                   | PDP-SPM™                   | SupreMOS™            |
| Build it Now™                                                                       | FRFET®                 | Power220®                  | SyncFET™             |
| CorePLUS™                                                                           | Global Power Resource™ | POWEREDGE®                 | SYSTEM GENERAL®      |
| CROSSVOLT™                                                                          | Green FPS™             | Power-SPM™                 | The Power Franchise® |
| CTL™                                                                                | Green FPS™ e-Series™   | PowerTrench®               | the power franchise  |
| Current Transfer Logic™                                                             | GTO™                   | Programmable Active Droop™ | TinyBoost™           |
| EcoSPARK®                                                                           | i-Lo™                  | QFET®                      | TinyBuck™            |
| EZSWITCH™ *                                                                         | IntelliMAX™            | QS™                        | TinyLogic®           |
|  ™ | ISOPLANAR™             | QT Optoelectronics™        | TINYOPTO™            |
|  ™ | MegaBuck™              | Quiet Series™              | TinyPower™           |
| Fairchild®                                                                          | MICROCOUPLER™          | RapidConfigure™            | TinyPulse™           |
| Fairchild Semiconductor®                                                            | MicroFET™              | SMART START™               | TinyPWM™             |
| FACT Quiet Series™                                                                  | MicroPak™              | SPM®                       | TinyWire™            |
| FACT®                                                                               | MillerDrive™           | STEALTH™                   | µSerDes™             |
| FAST®                                                                               | Motion-SPM™            | SuperFET™                  | UHC®                 |
| FastvCore™                                                                          | OPTOLOGIC®             | SuperSOT™.3                | Ultra FRFET™         |
| FlashWriter® *                                                                      | OPTOPLANAR®            | SuperSOT™.6                | UniFET™              |
|                                                                                     |                        | SuperSOT™.8                | VCX™                 |

\* EZSWITCH™ and FlashWriter® are trademarks of System General Corporation, used under license by Fairchild Semiconductor.

## DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## PRODUCT STATUS DEFINITIONS

### Definition of Terms

| Datasheet Identification | Product Status         | Definition                                                                                                                                                                                               |
|--------------------------|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Advance Information      | Formative or In Design | This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.                                                                       |
| Preliminary              | First Production       | This datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design. |
| No Identification Needed | Full Production        | This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.                                               |
| Obsolete                 | Not In Production      | This datasheet contains specifications on a product that has been discontinued by Fairchild Semiconductor. The datasheet is printed for reference information only.                                      |

Rev. I33



## О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

**Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.**

### Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (XC), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

## Перечень производителей, продукцию которых мы поставляем на российский рынок





# Trade Electronics.ru

гарантия бесперебойности производства и  
качества выпускаемой продукции

С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

<http://www.tradeelectronics.ru/>