


Chip Resistor Array

Type: **EXB1 : 0201 Array**
EXB2 : 0402 Array
EXB3 : 0603 Array
EXBN : 0402 Array
EXBV : 0603 Array
EXBS : 0805 Array

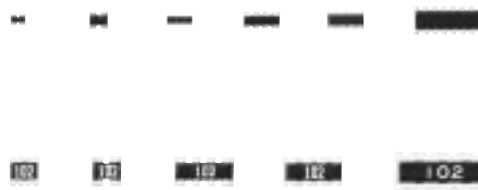

■ Features


- High density
 - 2 resistors in 0.8 mm × 0.6 mm size (EXB14V)
 - 4 resistors in 1.4 mm × 0.6 mm size (EXB18V)
 - 2 resistors in 1.0 mm × 1.0 mm size (EXB24V)
 - 4 resistors in 2.0 mm × 1.0 mm size (EXB28V, N8V)
 - 8 resistors in 3.8 mm × 1.6 mm size (EXB2HV)
 - 2 resistors in 1.6 mm × 1.6 mm size (EXB34V, V4V)
 - 4 resistors in 3.2 mm × 1.6 mm size (EXB38V, V8V)
 - 4 resistors in 5.1 mm × 2.2 mm size (EXBS8V)

- Improvement of placement efficiency
 Placement efficiency of Chip Resistor Array is two, four or eight times of the flat type chip resistor
- Reference Standard...IEC 60115-9, JIS C 5201-9, EIAJ RC-2129

■ Explanation of Part Numbers


1	2	3	4	5	6	7	8	9	10	11
E	X	B	V	8	V	4	7	2	J	V
Product Code	Chip Resistor Array Type: inch			No. of Terminal	Schematics	Resistance Value			Resistance Tolerance	Packaging Methods
Thick Film Chip Resistor Networks				4 4 Terminal	V Isolated type	The first two digits are significant figures of resistance value and the third one denotes the number of zeros following. Jumper is expressed by R00 Example : 222 → 2.2 kΩ			J ±5 %	Code Packaging Type
	1 0201 Array		8 8 Terminal						0 Jumper	Nil Embossed Carrier Taping 4 mm pitch, 2,500 pcs. EXBS8V
	2 0402 Array Convex Terminal		H 16 Terminal							X Punched Carrier Taping 2 mm pitch, 10,000 pcs. EXB14V, 18V, 24V, 28V, N8V
	3 0603 Array Concave Terminal									V Punched Carrier Taping 4 mm pitch, 5,000 pcs. EXB2HV, 34V, 38V, V4V, V8V
	N 0402 Array									
	V 0603 Array									
	S 0805 Array									

■ Construction (Example : Concave Terminal)

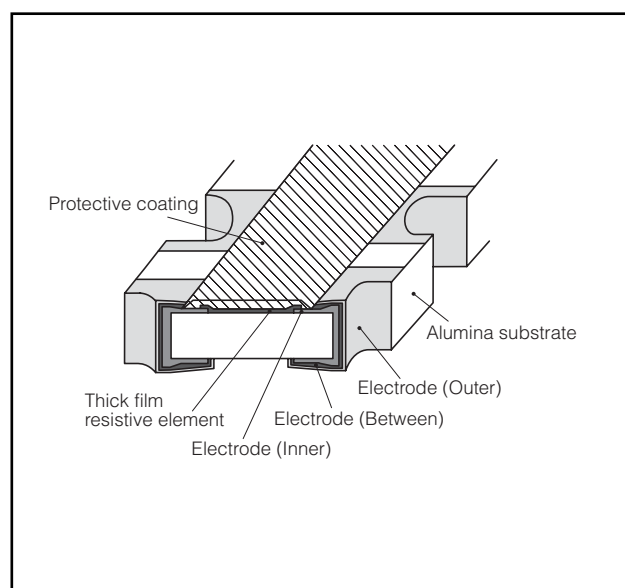


■ Schematics

- Isolated type

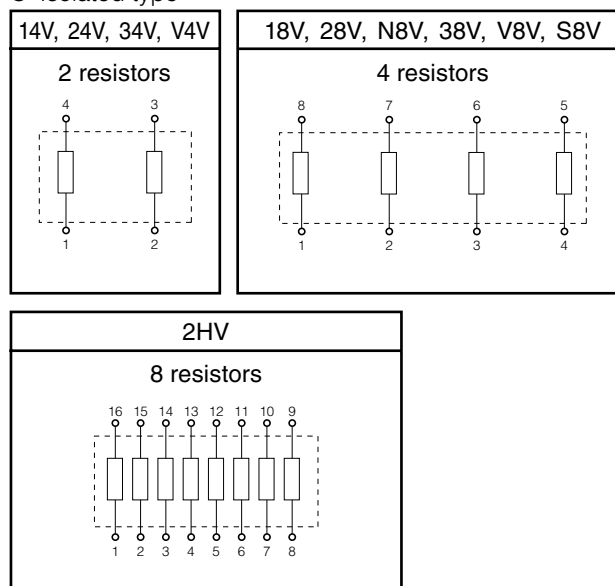

■ Dimensions in mm (not to scale)


(1) Convex Terminal type

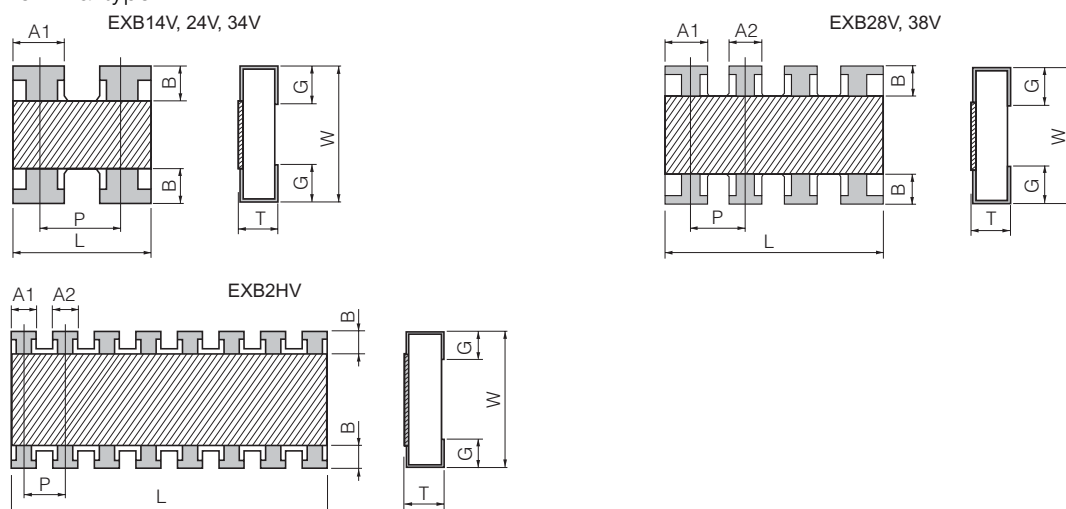

Type (inch size)	Dimensions (mm)								Mass (Weight) [g/1000 pcs.]
	L	W	T	A1	A2	B	P	G	
EXB14V (0201×2)	0.80 $\pm$ 0.10	0.60 $\pm$ 0.10	0.35 $\pm$ 0.10	0.35 $\pm$ 0.10	—	0.15 $\pm$ 0.10	(0.50)	0.15 $\pm$ 0.10	0.5
EXB24V (0402×2)	1.00 $\pm$ 0.10	1.00 $\pm$ 0.10	0.35 $\pm$ 0.10	0.40 $\pm$ 0.10	—	0.18 $\pm$ 0.10	(0.65)	0.25 $\pm$ 0.10	1.2
EXB28V (0402×4)	2.00 $\pm$ 0.10	1.00 $\pm$ 0.10	0.35 $\pm$ 0.10	0.45 $\pm$ 0.10	0.35 $\pm$ 0.10	0.20 $\pm$ 0.10	(0.50)	0.25 $\pm$ 0.10	2.0
EXB2HV (0402×8)	3.80 $\pm$ 0.10	1.60 $\pm$ 0.10	0.45 $\pm$ 0.10	0.35 $\pm$ 0.10	0.35 $\pm$ 0.10	0.30 $\pm$ 0.10	(0.50)	0.30 $\pm$ 0.10	9.0
EXB34V (0603×2)	1.60 $\pm$ 0.20	1.60 $\pm$ 0.15	0.50 $\pm$ 0.10	0.65 $\pm$ 0.15	—	0.30 $\pm$ 0.20	(0.80)	0.30 $\pm$ 0.20	3.5
EXB38V (0603×4)	3.20 $\pm$ 0.20	1.60 $\pm$ 0.15	0.50 $\pm$ 0.10	0.65 $\pm$ 0.15	0.45 $\pm$ 0.15	0.30 $\pm$ 0.20	(0.80)	0.35 $\pm$ 0.20	7.0

(2) Concave Terminal type


() Reference

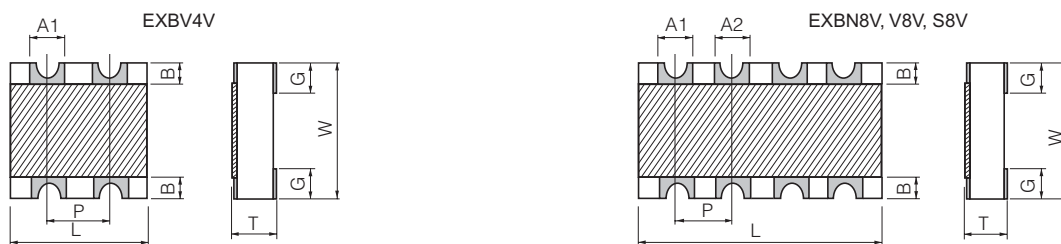

Type (inch size)	Dimensions (mm)								Mass (Weight) [g/1000 pcs.]
	L	W	T	A1	A2	B	P	G	
EXBN8V (0402×4)	2.00 $\pm$ 0.10	1.00 $\pm$ 0.10	0.45 $\pm$ 0.10	0.30 $\pm$ 0.10	0.30 $\pm$ 0.10	0.20 $\pm$ 0.15	(0.50)	0.30 $\pm$ 0.15	3.0
EXBV4V (0603×2)	1.60 $\pm$ 0.20 -0.10	1.60 $\pm$ 0.20 -0.10	0.60 $\pm$ 0.10	0.60 $\pm$ 0.10	—	0.30 $\pm$ 0.15	(0.80)	0.45 $\pm$ 0.15	5.0
EXBV8V (0603×4)	3.20 $\pm$ 0.20 -0.10	1.60 $\pm$ 0.20 -0.10	0.60 $\pm$ 0.10	0.60 $\pm$ 0.10	0.60 $\pm$ 0.10	0.30 $\pm$ 0.15	(0.80)	0.45 $\pm$ 0.15	10
EXBS8V (0805×4)	5.08 $\pm$ 0.20 -0.10	2.20 $\pm$ 0.20 -0.10	0.70 $\pm$ 0.20	0.80 $\pm$ 0.15	0.80 $\pm$ 0.15	0.50 $\pm$ 0.15	(1.27)	0.55 $\pm$ 0.15	30

(3) Flat Terminal type

() Reference

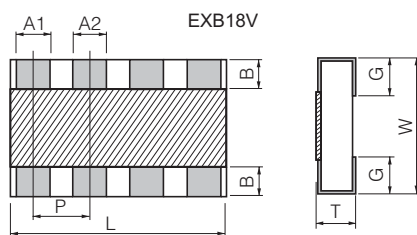

Type (inch size)	Dimensions (mm)								Mass (Weight) [g/1000 pcs.]
	L	W	T	A1	A2	B	P	G	
EXB18V (0201×4)	1.40 $\pm$ 0.10	0.60 $\pm$ 0.10	0.35 $\pm$ 0.10	0.20 $\pm$ 0.10	0.20 $\pm$ 0.10	0.10 $\pm$ 0.10	(0.40)	0.20 $\pm$ 0.10	1.0

() Reference

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

00 Sep. 2010

■ Ratings

Item		Specifications
Resistance Range		10 Ω to 1 MΩ: E24 series
Resistance Tolerance		J: ±5 %
Number of Terminals	14V,24V,V4V,34V	4 terminal
	18V,28V,N8V,38V,V8V,S8V	8 terminal
	2HV	16 terminal
Number of Resistors	14V,24V,V4V,34V	2 terminal
	18V,28V,N8V,38V,V8V,S8V	4 terminal
	2HV	8 terminal
Power Rating at 70 °C	14V,N8V	0.031 W/element
	18V	0.031 W/element (0.1 W/package)
	24V,28V,V4V,34V,V8V,38V	0.063 W/element
	S8V	0.1 W/element
	2HV	0.063 W/element (0.25 W/package)


Item		Specifications	
Limiting Element Voltage ⁽¹⁾	14V,18V	12.5 V	
	2HV	25 V	
	24V,28V,N8V,38V,34V,V4V,V8V	50 V	
	S8V	100 V	
Max. Over-load Voltage ⁽²⁾	14V,18V	25 V	
	2HV	50 V	
	24V,28V,N8V,38V,34V,V4V,V8V	100 V	
	S8V	200 V	
T.C.R.		±200×10 ⁻⁶ /°C	
Category Temperature Range		-55 °C to 125 °C	
Jumper Array	Rated Current	14V,18V	0.5 A
		2HV,24V,28V,N8V,38V,34V,V4V,V8V	1 A
		S8V	2 A
	Max. Overload Current	14V,18V	1 A
		2HV,24V,28V,N8V,38V,34V,V4V,V8V	2 A
		S8V	4 A

(1) Rated Continuous Working Voltage (RCWV) shall be determined from $RCWV = \sqrt{\text{Power Rating} \times \text{Resistance Value}}$, or Limiting Element Voltage listed above, whichever less.

(2) Overload (Short-time Overload) Test Voltage (SOTV) shall be determined from $SOTV = 2.5 \times \text{Power Rating}$ or max. Overload (Voltage) listed above whichever less.

Power Derating Curve

For resistors operated in ambient temperature above 70 °C, power rating shall be derated in accordance with the figure on the right.

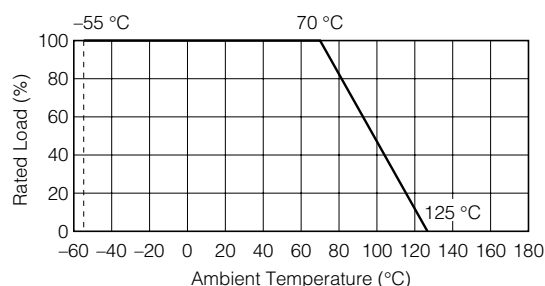



О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.




Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (XC), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

Перечень производителей, продукцию которых мы поставляем на российский рынок





Trade Electronics.ru

гарантия бесперебойности производства и
качества выпускаемой продукции

С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

<http://www.tradeelectronics.ru/>