

11-BIT PARALLEL TO SERIAL CONVERTER

■ GENERAL DESCRIPTION


The **NJU3754** is an 11-bit parallel to serial converter especially applying to MCU input port expander. It can operate from 2.7V to 5.5V.

The **NJU3754** requires only 3-port of MCU for data transmission and realizes the effective input port assignment.

The status of the input ports is output through a latch circuit, a shift register and a 3-state buffer as the serial data synchronizing with the serial clock. The hysteresis input circuit of the serial clock terminal realizes 5MHz and more operation.

Furthermore, pull-up resistors on chip of P0 to P10 terminals reduce external components for key-scan circuit, etc.

■ PACKAGE OUTLINE




NJU3754V


■ FEATURES

- 11-Bit Parallel In Serial Out
- 3-line Serial Interface Output
- Hysteresis Input 0.5V typ at 5V
- Maximum Operating Frequency 5MHz and more
- Operating Voltage 2.7 to 5.5V
- C-MOS Technology
- Package Outline SSOP16

■ PIN CONFIGURATION

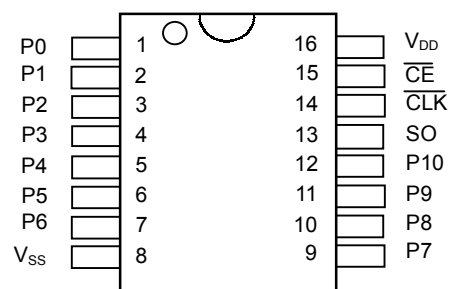

■ BLOCK DIAGRAM

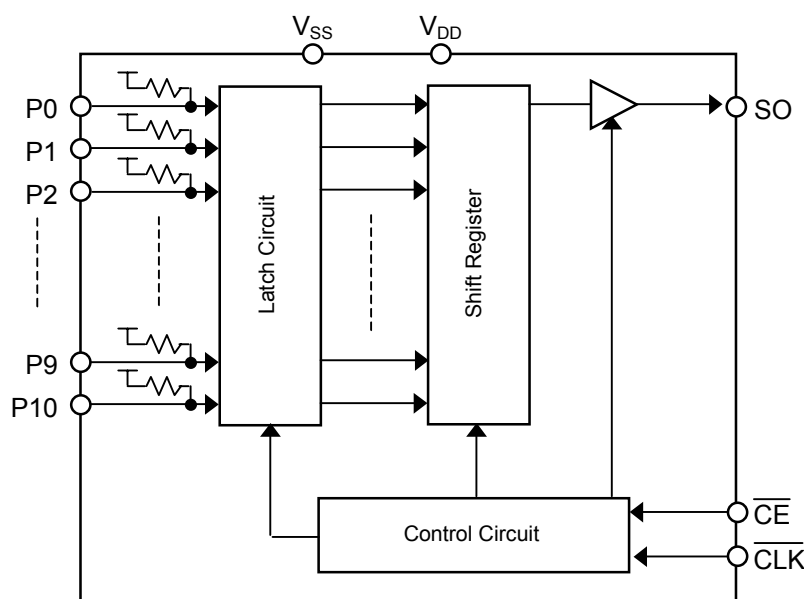

■ TERMINAL DESCRIPTION


No.	SYMBOL	I/O	FUNCTION
1	P0	I	Parallel Data Input Terminals (with pull-up resistors)
2	P1	I	
3	P2	I	
4	P3	I	
5	P4	I	
6	P5	I	
7	P6	I	
8	V _{SS}	-	Ground
9	P7	I	Parallel Data Input Terminals (with pull-up resistors)
10	P8	I	
11	P9	I	
12	P10	I	
13	SO	O	Serial Data Output Terminal
14	CLK	I	Serial Clock Input Terminal
15	$\overline{\text{CE}}$	I	Chip Enable Input Terminal
16	V _{DD}	-	Power Supply Terminal (2.7 to 5.5V)

■ FUNCTIONAL DESCRIPTION

At the falling edge of $\overline{\text{CE}}$ terminal, the status of P0 to P10 terminal is latched and transferred to the shift register. At the mean time, the P0 data is output from SO terminal. While $\overline{\text{CE}}$ terminal is "L", the data from P1 to P10 in the shift register are synchronized with the falling edge of CLK terminal and output from SO terminal.

When $\overline{\text{CE}}$ terminal is "H", SO terminal is high impedance.

Note 1) If the 11th falling edge and later are input to CLK terminal while $\overline{\text{CE}}$ is "L", the 12th and the following data are invalid.

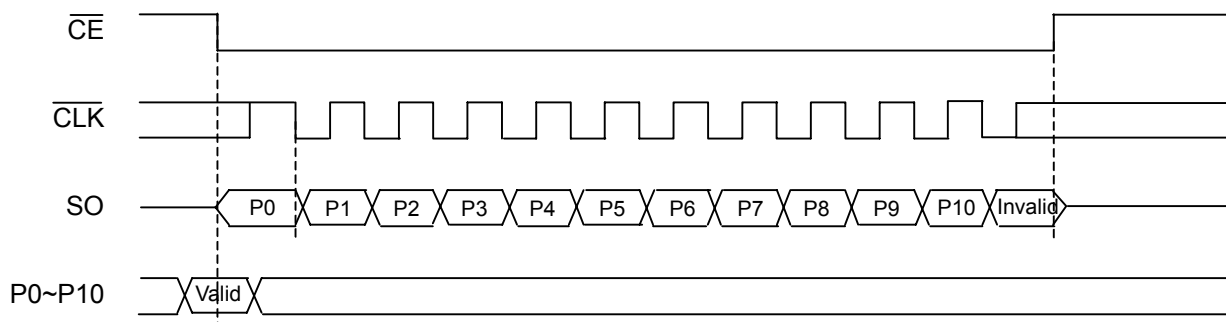

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)			
PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage Range	V_{DD}	-0.3 ~ +7.0	V
Input Voltage Range	V_I	$V_{SS}-0.3 \sim V_{DD}+0.3$	V
Power Dissipation	P_D	300 (SSOP)	mW
Operating Temperature Range	Topr	-40 ~ +85	°C
Storage Temperature Range	Tstg	-65 ~ +150	°C

Note 2) All voltage are relative to $V_{SS}=0V$ reference.

Note 3) Do not exceed the absolute maximum ratings, otherwise the stress may cause a permanent damage to the IC. It is also recommended that the IC is used in the range specified in the DC electrical characteristics, or the electrical stress may cause malfunctions and impact on the reliability.

Note 4) To stabilize the IC operation, place decoupling capacitor between V_{DD} - V_{SS} .

■ DC ELECTRICAL CHARACTERISTICS

(V _{DD} =2.7~5.5V, V _{SS} =0V, Ta=25°C, unless otherwise noted)							
PARAMETER	SYMBOL	CONDITION		MIN	TYP	MAX	UNIT
Operating Voltage	V _{DD}			2.7	-	5.5	V
Operating Current	I _{DD}	V _{DD} =5.5V P0~P10=Open CE=H, CLK=L SO=No load		-	-	10	μA
Input Voltage	V _{IH}	P0~P10, $\overline{\text{CLK}}$, $\overline{\text{CE}}$ Terminals		0.7V _{DD}	-	V _{DD}	V
	V _{IL}			V _{SS}	-	0.3V _{DD}	V
High-level Input Current	I _{IH}	V _{DD} =5V, V _I =5V P0~P10, CLK, $\overline{\text{CE}}$ Terminals		-	-	1	μA
Low-level Input Current 1	I _{IL1}	V _{DD} =5V, V _I =0V CLK, $\overline{\text{CE}}$ Terminals		-1	-	-	μA
Low-level Input Current 2	I _{IL2}	V _{DD} =5V, V _I =0V P0~P10 Terminals		-100	-40	-15	μA
Output Voltage	V _{OH}	I _{OH} =-0.4mA	SO Terminal	V _{DD} -0.4	-	V _{DD}	V
	V _{OL}	I _{OL} =+3.2mA		V _{SS}	-	0.4	V
3-State Leakage Current	I _{TSL}	SO Terminal CE=H		-2	-	2	μA

■ SWITCHING CHARACTERISTICS


($V_{DD}=2.7\sim 5.5V$, $V_{SS}=0V$, $T_a=25^\circ C$, unless otherwise noted)

PARAMETER	SYMBOL	CONDITION	MIN	TYP	MAX	UNIT
$\overline{CLK}$ Cycle Time	t_{CYC}	$\overline{CLK}$	200	-	-	ns
$\overline{CLK}$ Pulse Width (H)	t_{WCH}	$\overline{CLK}$	90	-	-	ns
$\overline{CLK}$ Pulse Width (L)	t_{WCL}	$\overline{CLK}$	90	-	-	ns
$\overline{CE}$ Pulse Width (H)	t_{WEH}	$\overline{CE}$	100	-	-	ns
$\overline{CE}$ Set-up Time before $\overline{CLK}$ Falling	t_{SS}	$\overline{CE} - \overline{CLK}$	100	-	-	ns
$\overline{CE}$ Hold Time after $\overline{CLK}$ Falling	t_{HS}	$\overline{CLK} - \overline{CE}$	100	-	-	ns
Parallel Data Set-up Time	t_{SPL}	$P0\sim P10 - \overline{CE}$	50	-	-	ns
Parallel Data Hold Time	t_{HPL}	$\overline{CE} - P0\sim P10$	50	-	-	ns
SO Delay Time after $\overline{CE}$ Falling	t_{DSL}	$\overline{CE} - SO$ (Note 6)	-	-	50	ns
SO Delay Time after $\overline{CLK}$ Falling	t_{DSS}	$\overline{CLK} - SO$ (Note 6)	-	-	50	ns
SO Hold Time after $\overline{CE}$ Rising	t_{DSZ}	$\overline{CE} - SO$ (Note 6)	-	-	20	ns
Rise Time	t_R	$\overline{CLK}$ Terminal	-	-	20	ns
Fall Time	t_F	$\overline{CLK}, \overline{CE}$ Terminals	-	-	20	ns


Note 5) A 15k Ω pull-up or pull-down resistor and a 50pF capacitor on the SO terminal.

Note 6) All timings are based on 30% and 70% voltage level of V_{DD} .

■ TIMING CHARTS

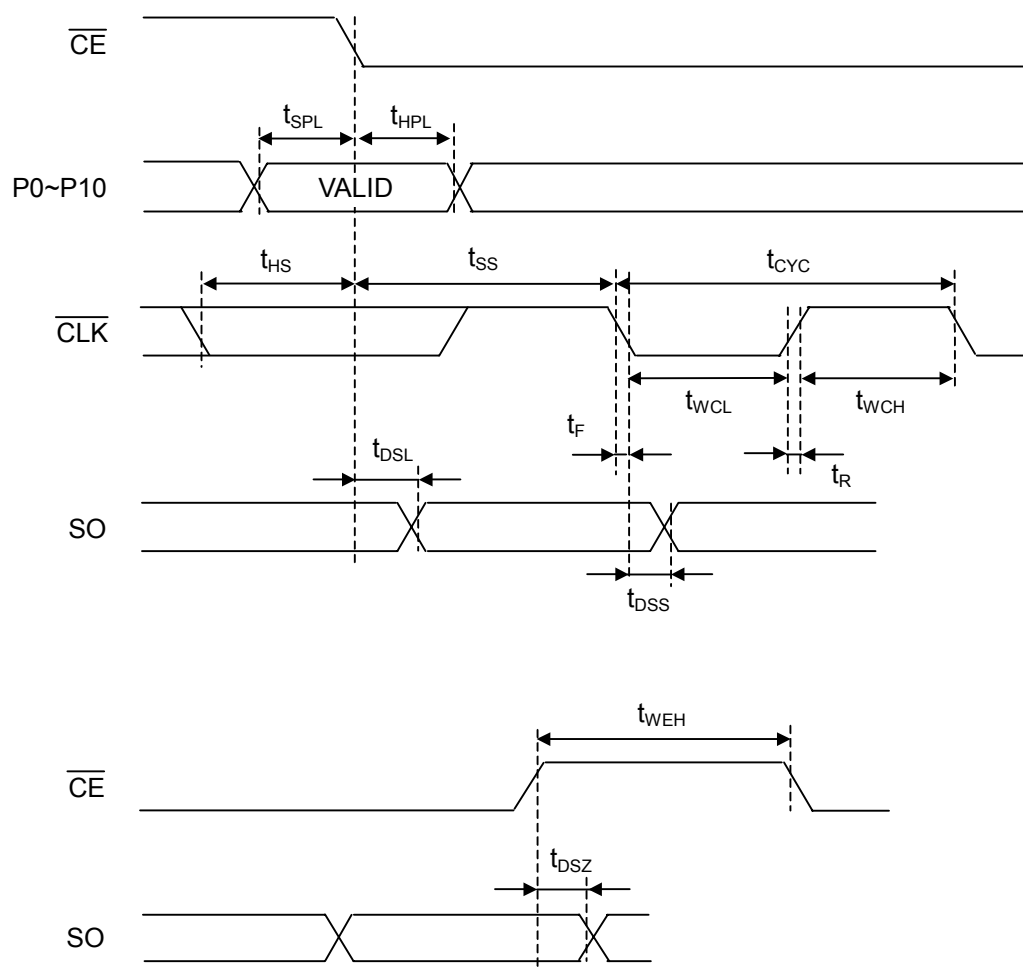

■ APPLICATION CIRCUIT

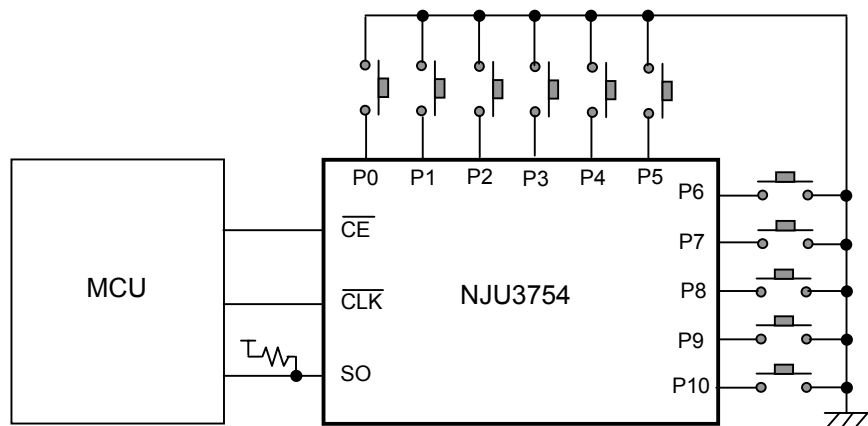

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJU3754V-TE1](#)



О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.




Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (XC), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

Перечень производителей, продукцию которых мы поставляем на российский рынок





Trade Electronics.ru

гарантия бесперебойности производства и
качества выпускаемой продукции

С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

<http://www.tradeelectronics.ru/>