

MAXIM

Complete, Dual, 12-Bit Multiplying DACs

General Description


The MX7837/MX7847 are dual, 12-bit, multiplying, voltage-output digital-to-analog converters (DACs). Each DAC has an output amplifier and a feedback resistor. The output amplifier is capable of developing $\pm 10V$ across a $2k\Omega$ load. The amplifier feedback resistor is internally connected to V_{OUT} on the MX7847. No external trims are required to achieve full 12-bit performance over the entire operating temperature range.

The MX7847 has a 12-bit parallel data input, whereas the MX7837 operates with a double-buffered 8-bit-bus interface that loads data in two write operations. All logic signals are level triggered and are TTL and CMOS compatible. Fast timing specifications make these DACs compatible with most microprocessors.

Applications

Small Component-Count Analog Systems
Digital Offset/Gain Adjustments
Industrial Process Control
Function Generators
Automatic Test Equipment
Automatic Calibration
Machine and Motion Control Systems
Waveform Reconstruction
Synchro Applications

Pin Configurations

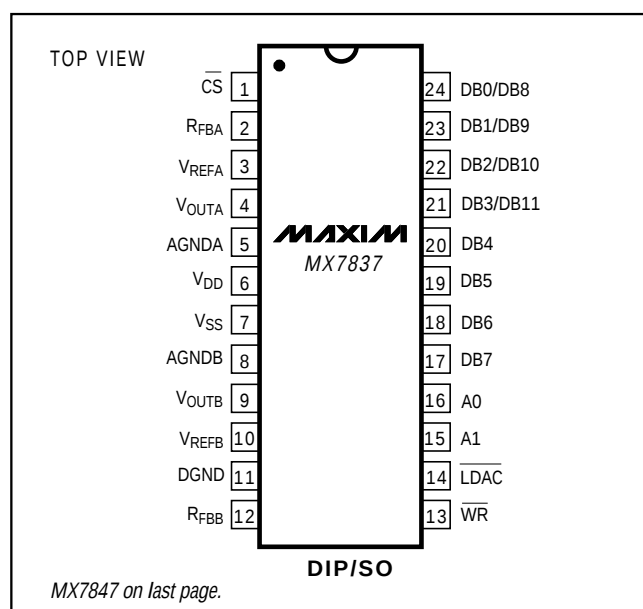

Features

- ♦ Two 12-Bit Multiplying DACs with Buffered Voltage Output
- ♦ Specified with $\pm 12V$ or $\pm 15V$ Supplies
- ♦ No External Adjustments Required
- ♦ Fast Timing Specifications
- ♦ 24-Pin DIP and SO Packages
- ♦ 12-Bit Parallel Interface (MX7847)
8-Bit + 4-Bit Interface (MX7837)


Ordering Information

PART	TEMP. RANGE	PIN-PACKAGE	ERROR (LSB)
MX7837JN	0°C to +70°C	24 Narrow Plastic DIP	± 1
MX7837KN	0°C to +70°C	24 Narrow Plastic DIP	$\pm 1/2$
MX7837JR	0°C to +70°C	24 Wide SO	± 1
MX7837KR	0°C to +70°C	24 Wide SO	$\pm 1/2$
MX7837C/D	0°C to +70°C	Dice*	± 1

Ordering Information continued on last page.

* Contact factory for availability and processing to MIL-STD-883.

Typical Operating Circuits

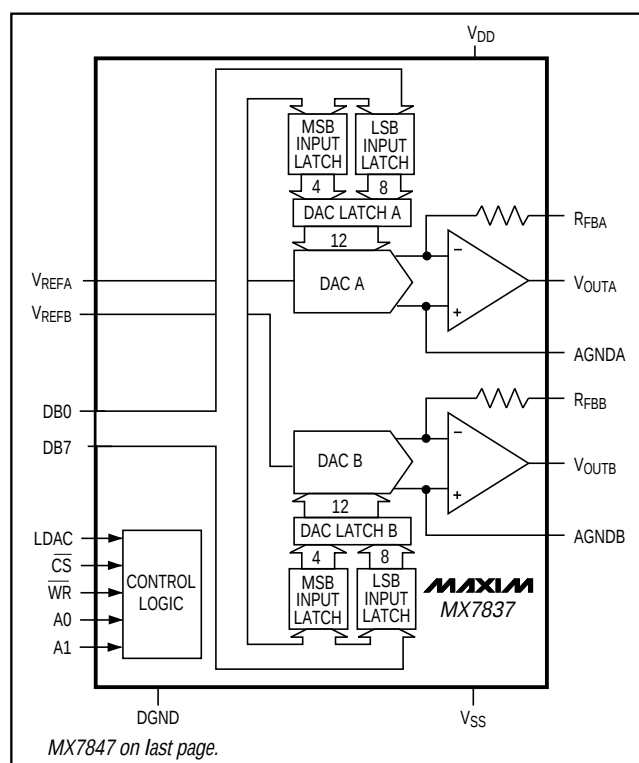

Complete, Dual, 12-Bit Multiplying DACs

ABSOLUTE MAXIMUM RATINGS

V_{DD} to DGND, AGNDA, AGNDB -0.3V to +17V
 V_{SS} to DGND, AGNDA, AGNDB (Note 1) +0.3V to -17V
 V_{REFA} , V_{REFB} to AGNDA, AGNDB .. ($V_{SS} - 0.3V$) to ($V_{DD} + 0.3V$)
 AGNDA, AGNDB to DGND -0.3V to ($V_{DD} + 0.3V$)
 V_{OUTA} , V_{OUTB} to AGNDA, AGNDB ($V_{SS} - 0.3V$) to ($V_{DD} + 0.3V$)
 R_{FBA} , R_{FBB} to AGNDA, AGNDB ($V_{SS} - 0.3V$) to ($V_{DD} + 0.3V$)
 Digital Inputs to DGND -0.3V to ($V_{DD} + 0.3V$)
 Continuous Power Dissipation ($T_A = +70^\circ\text{C}$)
 Narrow Plastic DIP (derate 13.33mW/ $^\circ\text{C}$ above $+70^\circ\text{C}$) 1067mW
 SO (derate 11.76mW/ $^\circ\text{C}$ above $+70^\circ\text{C}$) 941mW
 Narrow CERDIP (derate 12.50mW/ $^\circ\text{C}$ above $+70^\circ\text{C}$) .. 1000mW

Operating Temperature Ranges:

MX78_7J/_K_ 0°C to $+70^\circ\text{C}$
 MX78_7A/_B_ -40°C to $+85^\circ\text{C}$
 MX78_7SQ/TQ -55°C to $+125^\circ\text{C}$
 Storage Temperature Range -65°C to $+150^\circ\text{C}$
 Lead Temperature (soldering, 10sec) $+300^\circ\text{C}$

Note 1: If V_{SS} is open-circuited with V_{DD} and either AGND applied, the V_{SS} pin will float positive exceeding the *Absolute Maximum Ratings*. If this possibility exists, a Schottky diode connected between V_{SS} and GND ensures the maximum ratings will be observed.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS

($V_{DD} = 11.4V$ to $16.5V$, $V_{SS} = -11.4V$ to $-16.5V$, AGNDA = AGNDB = DGND = 0V, $V_{REFA} = V_{REFB} = +10V$, $R_L = 2k\Omega$, $C_L = 100pF$, V_{OUT} connected to R_{FB} (MX7837), $T_A = T_{MIN}$ to T_{MAX} , unless otherwise noted.) (Note 2)

PARAMETER	SYMBOL	CONDITIONS			MIN	TYP	MAX	UNITS
STATIC PERFORMANCE (Note 3)								
Resolution	N				12			Bits
Relative Accuracy	INL	MX78_7J/A/S					±1	LSB
		MX78_7K/B/T					±1/2	
Differential Nonlinearity	DNL	Guaranteed monotonic					±1	LSB
Zero-Code Offset Error		Loaded with all 0s, tempco = ±5μV/°C typ	T _A = +25°C				±2	mV
			T _A = T _{MIN} to T _{MAX}	MX78_7J/A			±4	
				MX78_7K/B			±3	
				MX78_7S/T			±5	
Gain Error		Loaded with all 1s, tempco = ±2ppm of FSR/°C typ	T _A = +25°C				±5	LSB
			T _A = T _{MIN} to T _{MAX}	MX78_7J/A/S			±2	
				MX78_7K/B/T			±7	
				MX78_7K/B/T			±4	
REFERENCE INPUTS								
V _{REF} Input Resistance					8	10	13	kΩ
V _{REFA} , V _{REFB} Resistance Matching						±0.5	±3	%
DIGITAL INPUTS								
Input High Voltage	V _{INH}				2.4			V
Input Low Voltage	V _{INL}						0.8	
Input Current		Digital inputs at 0V and V _{DD}					±1	μA
Input Capacitance (Note 4)							8	pF
ANALOG OUTPUTS								
DC Output Impedance						0.2		Ω
Short-Circuit Current		V _{OUT} connected to AGND				15		mA

Complete, Dual, 12-Bit Multiplying DACs

MX7837/MX7847

ELECTRICAL CHARACTERISTICS (continued)

($V_{DD} = 11.4V$ to $16.5V$, $V_{SS} = -11.4V$ to $-16.5V$, $AGNDA = AGNDB = DGND = 0V$, $V_{REFA} = V_{REFB} = +10V$, $R_L = 2k\Omega$, $C_L = 100pF$, V_{OUT} connected to R_{FB} (MX7837), $T_A = T_{MIN}$ to T_{MAX} , unless otherwise noted.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
POWER REQUIREMENTS						
V _{DD} Range	V _{DD}		11.4		16.5	V
V _{SS} Range	V _{SS}		-11.4		-16.5	V
Positive Supply Current	I _{DD}	Output unloaded		5	10	mA
Negative Supply Current	I _{SS}	Output unloaded		4	6	mA
Power-Supply Rejection	ΔGain/ΔV _{DD}	V _{DD} = 15V ±5%, V _{REF} = -10V			±0.01	% per %
	ΔGain/ΔV _{SS}	V _{SS} = -15V ±5%, V _{REF} = 10V			±0.01	
	ΔGain/ΔV _{DD}	V _{DD} = 12V ±5%, V _{REF} = -8.9V			±0.01	
	ΔGain/ΔV _{SS}	V _{SS} = -12V ±5%, V _{REF} = 8.9V			±0.01	
AC CHARACTERISTICS						
Voltage-Output Settling Time	t _s	Settling time to within ±1/2LSB of final DAC value; DAC latch alternately loaded with all 0s and all 1s		4		μs
Slew Rate				7		V/μs
Digital-to Analog Glitch Impulse	Q	DAC latch alternately loaded with 01...11 and 10...00		60		nV-s
Channel-to-Channel Isolation (V _{REFA} to V _{OUTB} , V _{REFB} to V _{OUTA})		V _{REF} = 20p-p, 10kHz sine wave, Alternate DAC Latch Loaded with all 0s		-95		dB
Multiplying Feedthrough Error		V _{REF} = 20V _{p-p} , 10kHz sine wave, latches loaded with all 0s		-90		dB
Unity-Gain Small-Signal Bandwidth		V _{REF} = 100mV _{p-p} sine wave, DAC latch loaded with all 1s		1		MHz
Full-Power Bandwidth		V _{REF} = 20V _{p-p} sine wave, DAC latch loaded with all 1s		125		kHz
Total Harmonic Distortion	THD	V _{REF} = 6V _{RMS} , 1kHz, DAC latch loaded with all 1s		-88		dB
Digital Crosstalk		Code transition from all 0s to all 1s; see <i>Typical Operating Characteristics</i> graphs		10		nV-s
Output Noise Voltage at +25°C (0.1Hz to 10Hz)		Amplifier noise and Johnson noise of R _{FB}		2		μV _{RMS}

Note 2: The analog outputs can swing to within 2.5V of the supply rails. Hence, for good linearity towards full-scale, $|V_{REFA}|$ and $|V_{REFB}|$ must be at least 2.5V lower than V_{DD} and $|V_{SS}|$. Tests done with supply voltages below $\pm 12.5V$ are done with $V_{REFA} = V_{REFB} = \pm 8.9V$.

Note 3: Static performance tested at $V_{DD} = +15V$, $V_{SS} = -15V$. Performance over supplies guaranteed by PSRR test.

Note 4: Guaranteed by design.

Complete, Dual, 12-Bit Multiplying DACs

TIMING CHARACTERISTICS


(V_{DD} = 11.4V to 16.5V, V_{SS} = -11.4V to -16.5V, AGNDA = AGNDB = DGND = 0V, T_A = T_{MIN} to T_{MAX}, unless otherwise noted.) (Note 5)

PARAMETER	SYMBOL	CONDITIONS	MX78_7J/K/A/B MIN MAX	MX78_7S/T MIN MAX	UNITS
CS to WR Setup Time	t ₁		0	0	ns
CS to WR Hold Time	t ₂		0	0	ns
WR Pulse Width	t ₃		80	80	ns
Data to WR Setup Time	t ₄		80	80	ns
Data to WR Hold Time	t ₅		10	10	ns
Address to WR SetupTime	t ₆	MX7837 only	15	15	ns
Address to WR Hold Time	t ₇	MX7837 only	15	15	ns
LDAC Pulse Width	t ₈	MX7837 only	80	80	ns

Note 5: All input signals are specified with t_R = t_F ≤ 5ns. Logic swing is 0V to 5V.

Typical Operating Characteristics

(T_A = +25°C, V_{DD} = 15V, V_{SS} = -15V, R_L = 2kΩ, C_L = 100pF, unless otherwise noted)

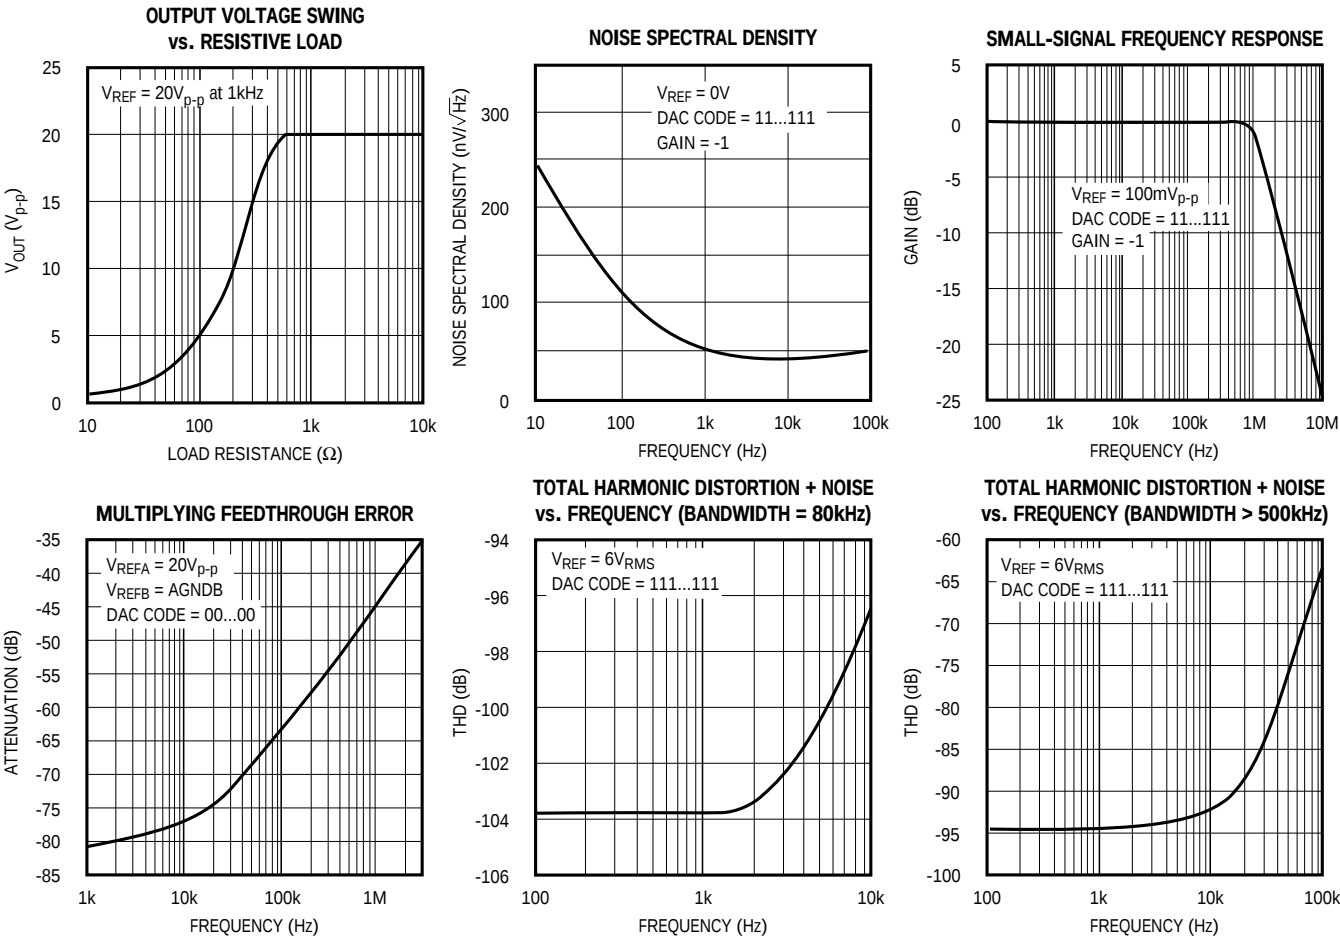


Complete, Dual, 12-Bit Multiplying DACs

MX7837/MX7847

Typical Operating Characteristics (continued)


($T_A = +25^\circ\text{C}$, $V_{DD} = 15\text{V}$, $V_{SS} = -15\text{V}$, $R_L = 2\text{k}\Omega$, $C_L = 100\text{pF}$, unless otherwise noted.)

SMALL-SIGNAL PULSE RESPONSE

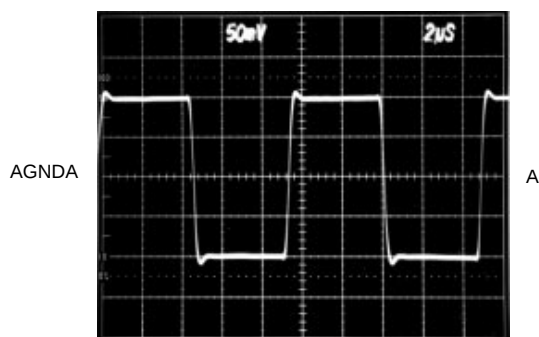

A = V_{OUTA} , 50mV/div
TIMEBASE = 2μs/div
 $V_{REFA} = \pm 100\text{mV}$ SQUARE WAVE

LARGE-SIGNAL PULSE RESPONSE

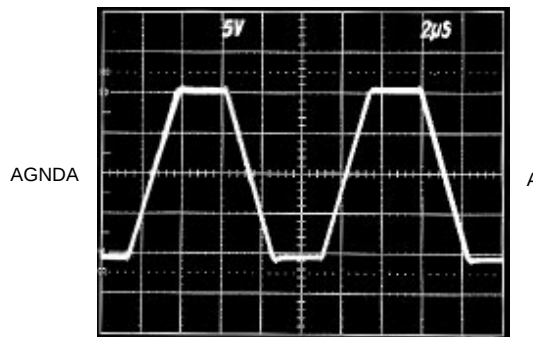

A = V_{OUTA} , 5V/div
TIMEBASE = 2μs/div
 $V_{REFA} = \pm 10\text{V}$ SQUARE WAVE

Pin Description

PIN		NAME	FUNCTION
MX7837	MX7847		
1	–	CS	Chip Select – active-low logic input
–	1	CSA	Chip-Select Input for DAC A – active-low logic input
2	–	R _{FBA}	Amplifier Feedback Resistor for DAC A
–	2	CSB	Chip-Select Input for DAC B – active-low logic input
3	3	V _{REFA}	Reference Input Voltage for DAC A
4	4	V _{OUTA}	Analog Output Voltage from DAC A
5	5	AGNDA	Analog Ground for DAC A
6	6	V _{DD}	Positive Power Supply
7	7	V _{SS}	Negative Power Supply
8	8	AGNDB	Analog Ground for DAC B
9	9	V _{OUTB}	Analog Output Voltage from DAC B
10	10	V _{REFB}	Reference Input Voltage for DAC B
11	11	DGND	Digital Ground
12	–	R _{FBB}	Amplifier Feedback Resistor for DAC B
–	12	DB11	Data Bit 11 (MSB)
13	13	WR	Write Input – active-low logic input (MX7837); positive-edge-triggered input used with CSA and CSB (MX7847)
14	–	LDAC	Asynchronous Load – DAC input, active-low
–	14-24	DB10-DB0	Data Bit 10 to Data Bit 0 (LSB)
15	–	A1	Address Input – most significant address input for input latches
16	–	A0	Address Input – least significant address input for input latches
17-20	–	DB7-DB4	Data Bit 7 to Data Bit 4
21-24	–	DB3/DB11-DB0/DB8	Data Bit 3 to Data Bit 0 (LSB), or Data Bit 11 (MSB) to Data Bit 8

Complete, Dual, 12-Bit Multiplying DACs

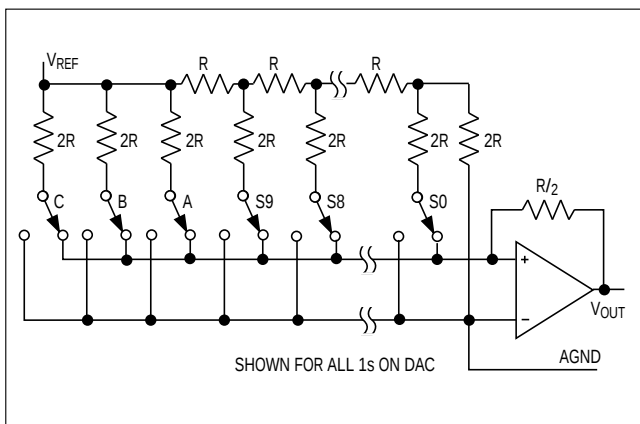


Figure 1. D/A Simplified Circuit Diagram

Detailed Description

D/A Section

Figure 1 shows a simplified circuit diagram for one of the DACs and the output amplifier. Using a segmented scheme, the two MSBs of the 12-bit data word are decoded to drive the three switches (A to C). The remaining 10 bits drive the switches (S0 to S9) in a standard R-2R ladder.

Each switch (A to C) directs 1/4 of the total reference current, and the remaining current passes through the R-2R section.

The output amplifier and feedback resistor convert current to voltage as follows: $V_{OUT} = (-D)(V_{REF})$, where D is the fractional representation of the digital word. (D can be set from 0 to 4095/4096.)

The output amplifier is capable of developing $\pm 10V$ across a 2k Ω load. It is internally compensated and settles to 0.01% FSR (1/2LSB) in less than 4 μs . V_{OUT} on the MX7837 is not internally connected to R_{FB} .

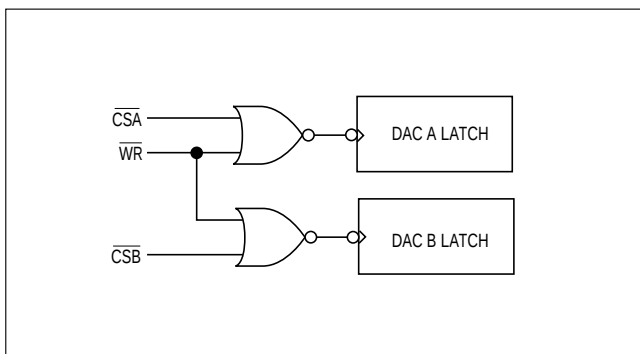


Figure 2. MX7847 Input Control Logic

Interface Logic Information (MX7847)

Figure 2 shows the MX7847 input control logic. The device contains two independent DACs, each with its own $\overline{CS}$ input and a common $\overline{WR}$ input. $\overline{CSA}$ and $\overline{WR}$ control data loading to the DAC A latch, and $\overline{CSB}$ and $\overline{WR}$ control data loading to the DAC B latch. The latches are edge triggered so that input data is latched to the respective latch on $\overline{WR}$'s rising edge. The same data will be latched to both DACs if $\overline{CSA}$ and $\overline{CSB}$ are low and $\overline{WR}$ is taken high. Table 1 shows the device control-logic truth table, and Figure 3 shows the write-cycle timing diagram.

Table 1. MX7847 Truth Table

$\overline{CSA}$	$\overline{CSB}$	$\overline{WR}$	Function
X	X	1	No Data Transfer
1	1	X	No Data Transfer
0	1	$\uparrow$	Data Latched to DAC A
1	0	$\uparrow$	Data Latched to DAC B
0	0	$\uparrow$	Data Latched to Both DACs
$\uparrow$	1	0	Data Latched to DAC A
1	$\uparrow$	0	Data Latched to DAC B
$\uparrow$	$\uparrow$	0	Data Latched to Both DACs

X = Don't Care $\uparrow$ = Rising Edge Triggered

Interface Logic Information (MX7837)

The MX7837 input loading structure is configured for interfacing with 8-bit-wide data-bus microprocessors. Each DAC has two 12-bit latches: an input latch, and a DAC latch. Each input latch is subdivided into a least-significant 8-bit latch and a most-significant 4-bit latch. The data held in the DAC latches determines the outputs. Figure 4 shows the MX7837 input control logic, and Figure 5 shows the write-cycle timing diagram.

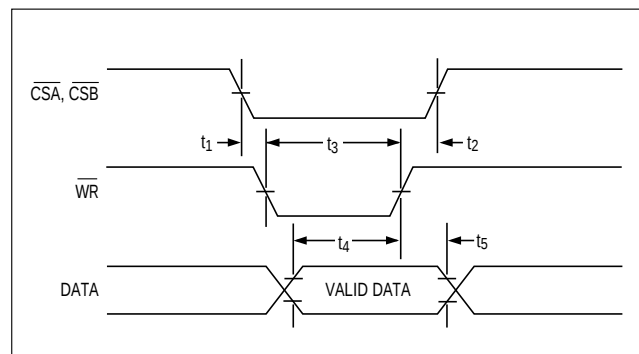


Figure 3. MX7847 Write-Cycle Timing Diagram

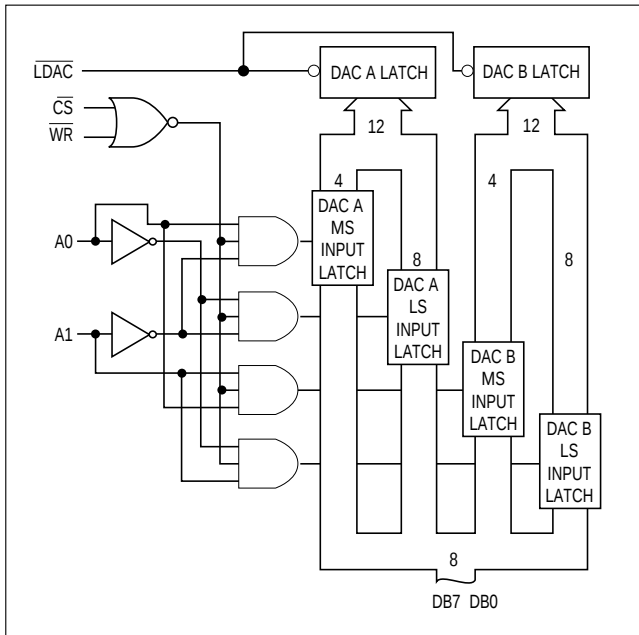


Figure 4. MX7837 Input Control Logic

$\overline{\text{CS}}$, $\overline{\text{WR}}$, A0, and A1 control data loading to the input latches. The eight data inputs accept right-justified data, which can be loaded to the input latches in any sequence. If $\overline{\text{LDAC}}$ is held high, loading data to the input latches will not change the analog output. A0 and A1 determine which input latch will receive the data when $\overline{\text{CS}}$ and $\overline{\text{WR}}$ are low. Table 2 shows the control logic truth table.

Table 2. MX7837 Truth Table

$\overline{\text{CS}}$	$\overline{\text{WR}}$	A1	A0	$\overline{\text{LDAC}}$	Function
1	X	X	X	1	No Data Transfer
X	1	X	X	1	No Data Transfer
0	0	0	0	1	DAC A LS Input Latch Transparent
0	0	0	1	1	DAC A MS Input Latch Transparent
0	0	1	0	1	DAC B LS Input Latch Transparent
0	0	1	1	1	DAC B MS Input Latch Transparent
1	1	X	X	0	Updated Simultaneously from the Respective Input Latches

X = Don't Care

The $\overline{\text{LDAC}}$ input controls 12-bit data transfer from the input latches to the DAC latches. When $\overline{\text{LDAC}}$ is taken low, both DAC latches (thus, both analog outputs) are updated simultaneously. When $\overline{\text{LDAC}}$ is low, the DAC latches are transparent; DAC data is latched on the rising edge of $\overline{\text{LDAC}}$. The $\overline{\text{LDAC}}$ input is asynchronous

Complete, Dual, 12-Bit Multiplying DACs

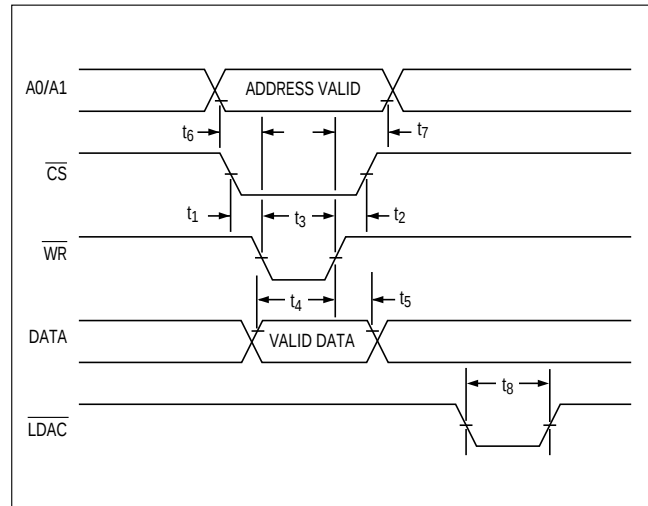


Figure 5. MX7837 Write-Cycle Timing Diagram

and independent of $\overline{\text{WR}}$. This is useful in many applications, especially in updating multiple MX7837s simultaneously. However, be careful when exercising $\overline{\text{LDAC}}$ during a write cycle; if an $\overline{\text{LDAC}}$ operation overlaps a $\overline{\text{CS}}$ and $\overline{\text{WR}}$ operation, invalid data may be latched to the output. To avoid this, $\overline{\text{LDAC}}$ must remain low after $\overline{\text{CS}}$ or $\overline{\text{WR}}$ have returned high for a period equal to or greater than t_8 , the minimum $\overline{\text{LDAC}}$ pulse width.

Unipolar Binary Operation

Figure 6 shows DAC A (MX7837/MX7847) connected for unipolar binary operation. Similar connections apply for DAC B. When V_{IN} is an AC signal, the circuit performs 2-quadrant multiplication. Table 3 shows the code table for this circuit. On the MX7847, the R_{FB} feedback resistor is internally connected to V_{OUT} .

Table 3. Unipolar Code Table

DAC Latch Contents MSB	LSB	Analog Output, V_{OUT}
1111 1111 1111		$-V_{\text{IN}} \times \left(\frac{4095}{4096} \right)$
1000 0000 0000		$-V_{\text{IN}} \times \left(\frac{2048}{4096} \right) = -\frac{1}{2} V_{\text{IN}}$
0000 0000 0001		$-V_{\text{IN}} \times \left(\frac{1}{4096} \right)$
0000 0000 0000		0V

Note: $1\text{LSB} = \left(\frac{V_{\text{IN}}}{4096} \right)$

Complete, Dual, 12-Bit Multiplying DACs

Bipolar Operation (4-Quadrant Multiplication)

Figure 7 shows the MX7837/MX7847 connected for binary operation. The offset-binary coding is shown in Table 4. When V_{IN} is an AC signal, the circuit performs 4-quadrant multiplication. R_1 , R_2 , and R_3 resistors should be 0.01% ratio matched to maintain gain-error specifications. On the MX7847, the R_{FB} feedback resistor is internally connected to V_{OUT} .

Table 4. Bipolar Code Table

DAC Latch Contents	Analog Output, V_{OUT}
MSB LSB	
1111 1111 1111	$+V_{IN} \times \left(\frac{2047}{2048} \right)$
1000 0000 0001	$+V_{IN} \times \left(\frac{1}{2048} \right)$
1000 0000 0000	0V
0111 1111 1111	$-V_{IN} \times \left(\frac{1}{2048} \right)$
0000 0000 0000	$-V_{IN} \times \left(\frac{2048}{2048} \right) = -V_{IN}$

Note : 1LSB = $\left(\frac{V_{IN}}{2048} \right)$

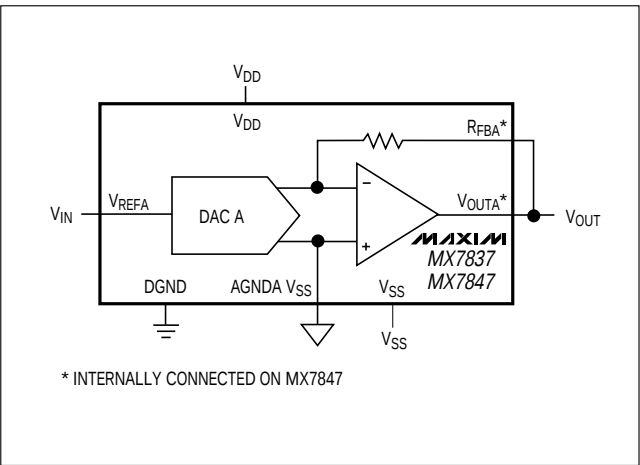


Figure 6. Unipolar Binary Operation

Applications Information

Ground Management

The use of an uninterrupted ground plane is strongly recommended. AC or transient voltages between analog and digital grounds (between AGNDA/AGNDB and DGND) can inject noise into the analog circuitry. Connect the MX7837/MX7847 AGNDs and DGND directly to the ground plane or to a star ground to ensure that they are at the same potential. In complex systems with separate analog and digital ground planes, connect two diodes (1N914 or equivalent) in inverse parallel between the AGND and DGND pins.

Power-Supply Decoupling

To minimize noise, decouple the V_{DD} and V_{SS} lines to DGND using a 10 μ F capacitor in parallel with a 0.1 μ F ceramic capacitor. Minimize capacitor lead lengths for best noise rejection.

Operation with Reduced Power-Supply Voltages

The MX7837/MX7847 are specified for operation with $V_{DD}/V_{SS} = \pm 11.4V$ to $\pm 16.5V$. However, the output amplifier requires 2.5V of headroom, so the reference input should not come within 2.5V of V_{DD}/V_{SS} in order to maintain accuracy at full scale.



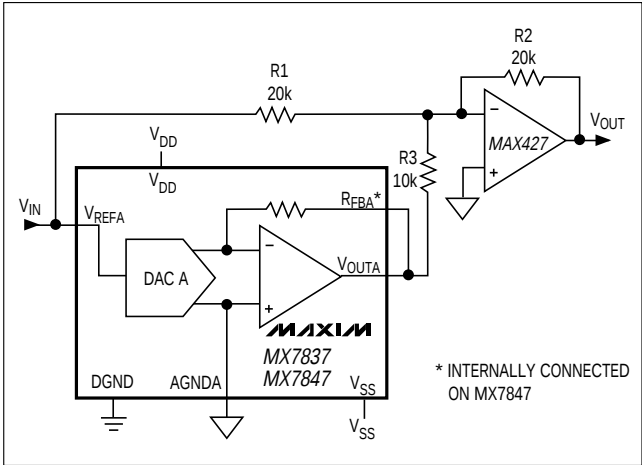


Figure 7. Bipolar Offset Binary Operation

MX7837/MX7847

Ordering Information (continued)

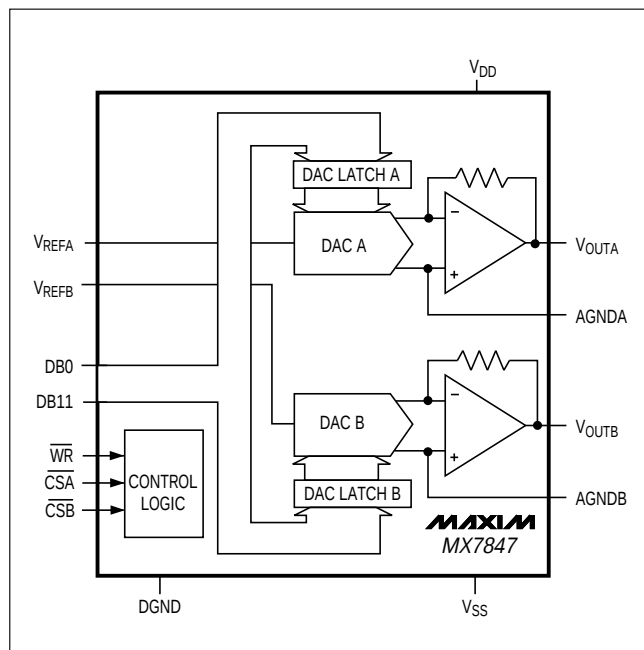


PART	TEMP. RANGE	PIN-PACKAGE	ERROR (LSB)
MX7837AN	-40°C to +85°C	24 Narrow Plastic DIP	±1
MX7837BN	-40°C to +85°C	24 Narrow Plastic DIP	±1/2
MX7837AR	-40°C to +85°C	24 Wide SO	±1
MX7837BR	-40°C to +85°C	24 Wide SO	±1/2
MX7837AQ	-40°C to +85°C	24 Narrow Cerdip	±1
MX7837BQ	-40°C to +85°C	24 Narrow Cerdip	±1/2
MX7837SQ	-55°C to +125°C	24 Narrow Cerdip	±1
MX7837TQ	-55°C to +125°C	24 Narrow Cerdip	±1/2
MX7847JN	0°C to +70°C	24 Narrow Plastic DIP	±1
MX7847KN	0°C to +70°C	24 Narrow Plastic DIP	±1/2
MX7847JR	0°C to +70°C	24 Wide SO	±1
MX7847KR	0°C to +70°C	24 Wide SO	±1/2
MX7847C/D	0°C to +70°C	Dice*	±1
MX7847AN	-40°C to +85°C	24 Narrow Plastic DIP	±1
MX7847BN	-40°C to +85°C	24 Narrow Plastic DIP	±1/2
MX7847AR	-40°C to +85°C	24 Wide SO	±1
MX7847BR	-40°C to +85°C	24 Wide SO	±1/2
MX7847AQ	-40°C to +85°C	24 Narrow Cerdip	±1
MX7847BQ	-40°C to +85°C	24 Narrow Cerdip	±1/2
MX7847SQ	-55°C to +125°C	24 Narrow Cerdip	±1
MX7847TQ	-55°C to +125°C	24 Narrow Cerdip	±1/2


Complete, Dual, 12-Bit Multiplying DACs

Chip Topographies

MX7837/MX7847

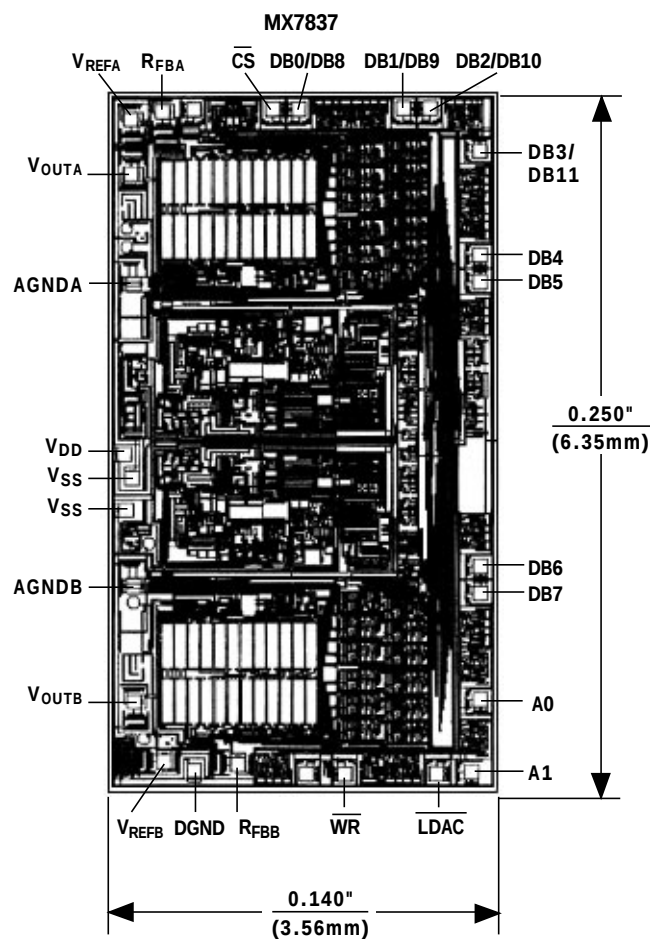

TRANSISTOR COUNT: 1240;
SUBSTRATE CONNECTED TO V_{DD} .


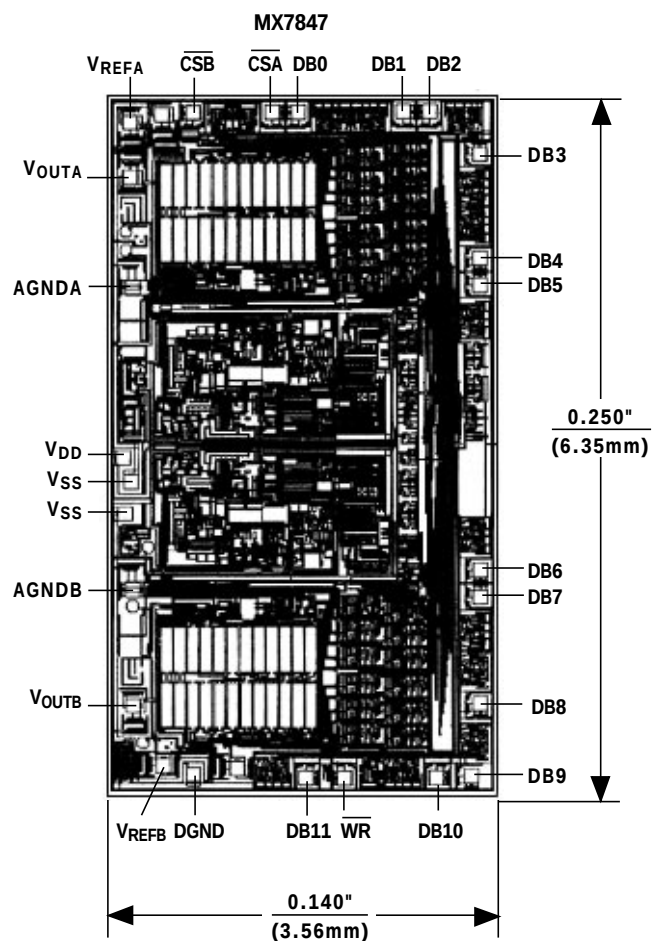


TRANSISTOR COUNT: 1240;
SUBSTRATE CONNECTED TO V_{DD} .

Complete, Dual, 12-Bit Multiplying DACs


Package Information

MX7837/MX7847

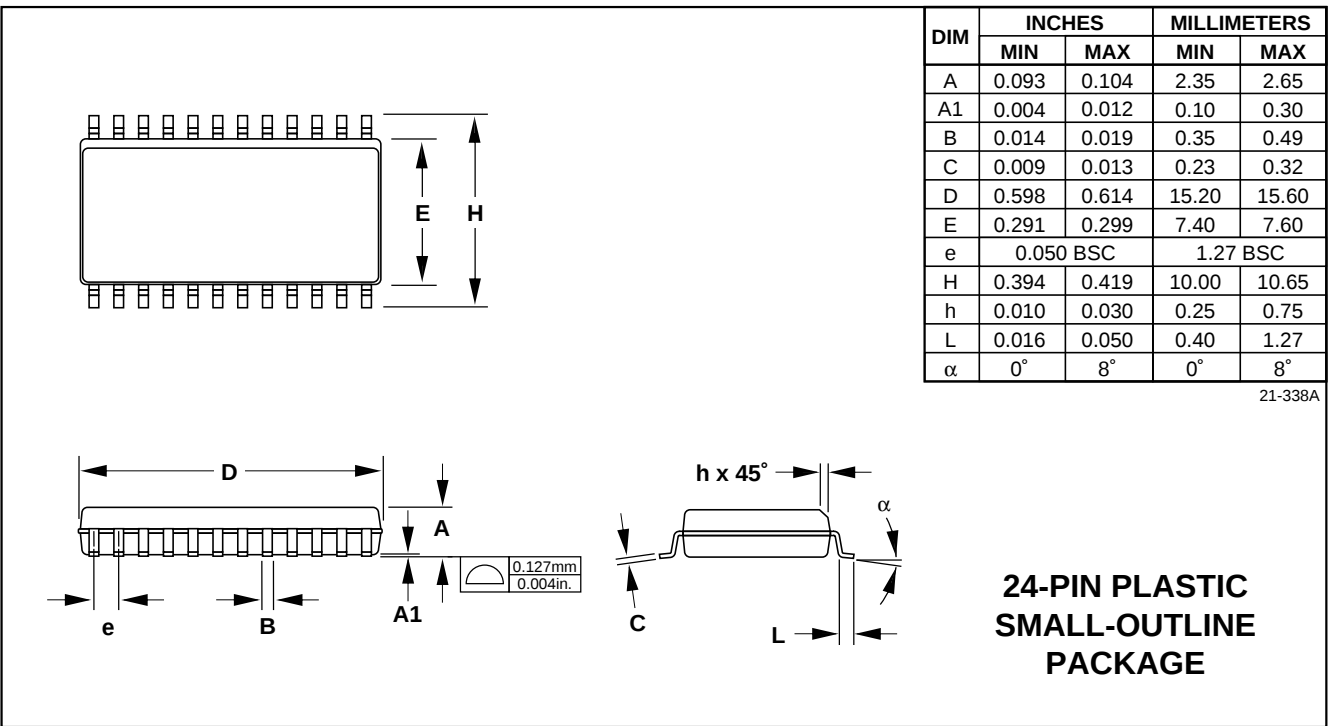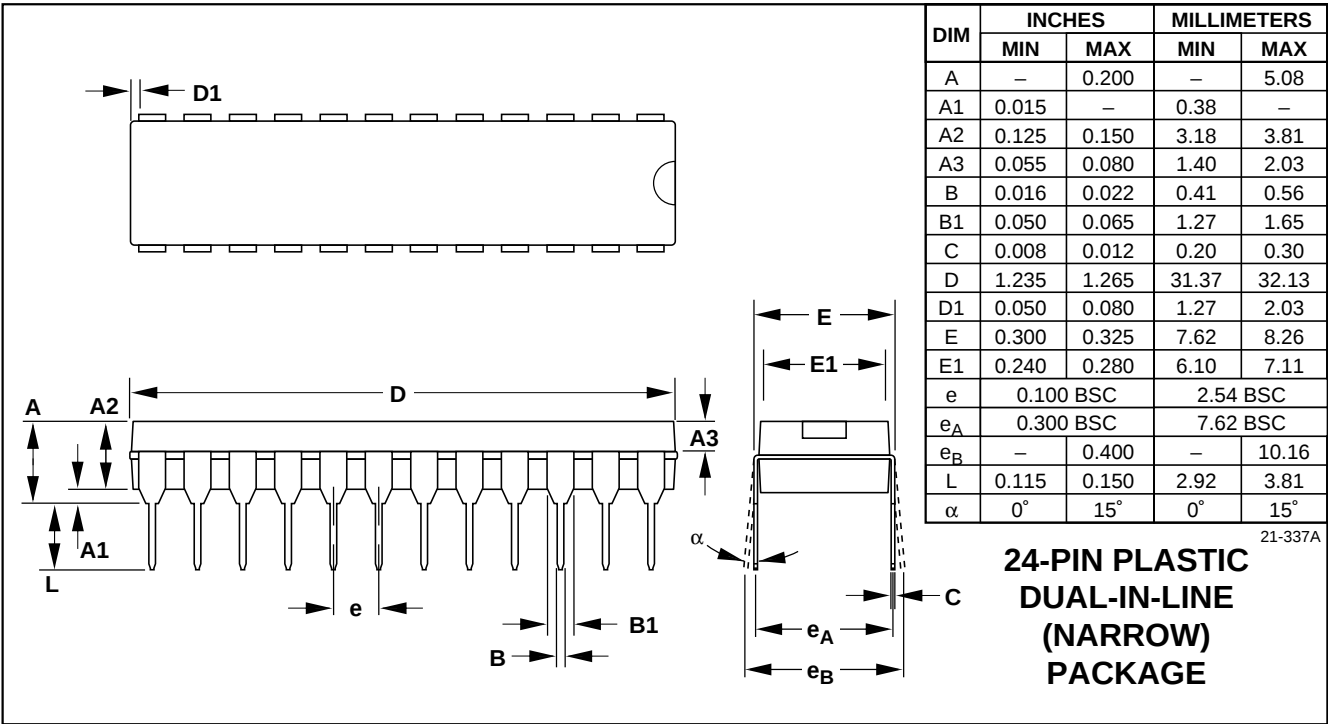

Complete, Dual, 12-Bit Multiplying DACs

Package Information (continued)

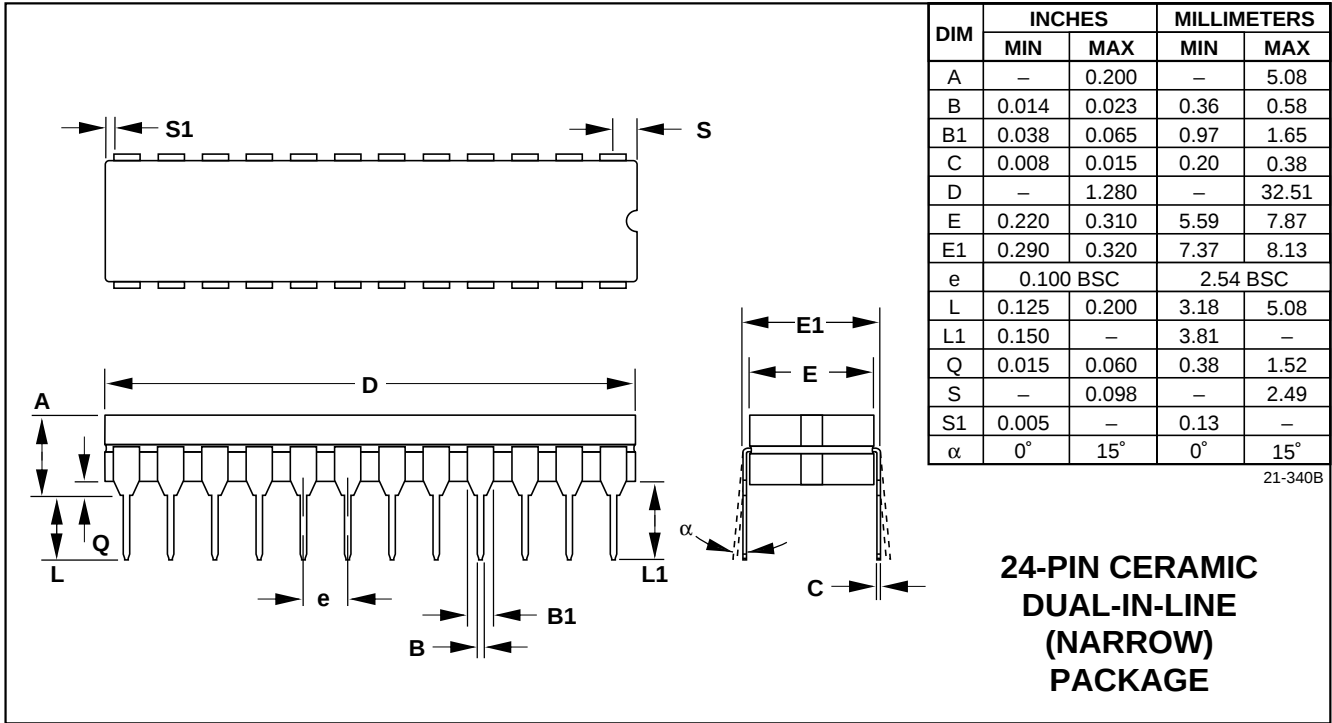

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

12 _____ Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 (408) 737-7600



О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.

Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (XC), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

Перечень производителей, продукцию которых мы поставляем на российский рынок





Trade Electronics.ru

гарантия бесперебойности производства и
качества выпускаемой продукции

С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

<http://www.tradeelectronics.ru/>