

User manual of

USB 2.0 all-in-1 Card Reader

PRODUCT INTRODUCTION:

This is a USB 2.0 all-in-1 card reader which has four sockets to access all the flash memory cards of various mechanical dimensions and electrical specifications available now.

The all-in-1 card reader can access the following flash memory cards:

(1) CF socket for CF Type (I, II), Extreme CF, Extreme III CF, Ultra II CF, HS CF, XS-XS CF, CF Elite Pro, CF Pro, CF Pro II, IBM MD, Hitachi MD, Magicstor MD

(2) SM socket for SM, SM ROM, T-Flash

(3) 2-in-1 SD socket for SD, Extreme SD, Extreme III SD, Ultra II SD, SD Ultra X, Ultra speed SD, SD Pro, SD Elite Pro, HS SD,

MMC, HS MMC, Mini SD, HS Mini SD, MMC 4.0, HS RS MMC, RS MMC,

RS MMC 4.0, DV-RS MMC

(4) MS socket for MS, MS Pro, MS MG, MS MG Pro, Extreme MS Pro, Extreme III MS Pro, Ultra II MS Pro, HS MS MG Pro, HS MS Pro, MS Rom, MS Select, MS Duo, MS Pro Duo, MS MG Duo, MS MG Pro Duo, HS MS MG Pro Duo, HS MS Pro Duo, M2

1 · Driver Installation for Windows 98 System

For Windows 98 system, vendor supplied drivers must be installed first before the device can be recognized.


If you are using the Windows 98 System, please follow the installation steps below to complete the Card Reader driver installation first.

When the all-in-1 card reader is connected to a PC of Windows 98 with no driver installed, the “Add New Hardware Wizard” message window will pop up as the figure shown below:




Click the “Cancel” button to close the window.



1. Put the Driver CD into the CD-ROM, and double click the icon “IconUtility_Generic_AU6377(PID=6377)_40SVista_v2.00.01.01.exe” to install the driver

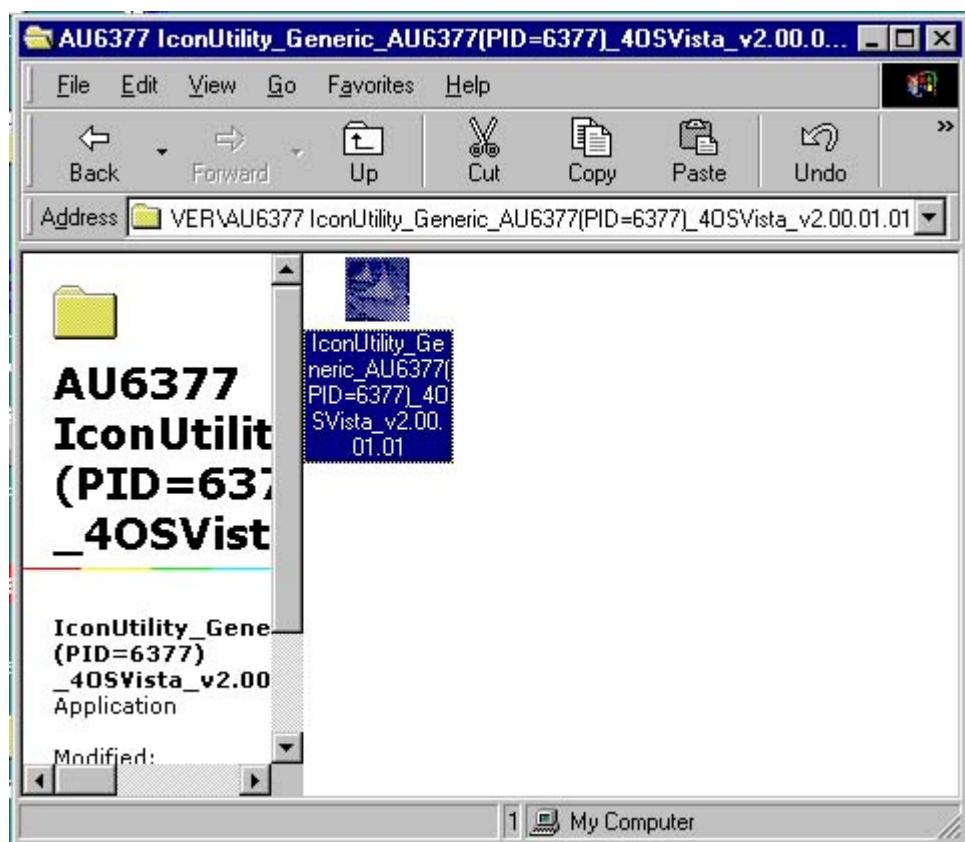

2. Click "Next" on the welcome page of "InstallShield Wizard"

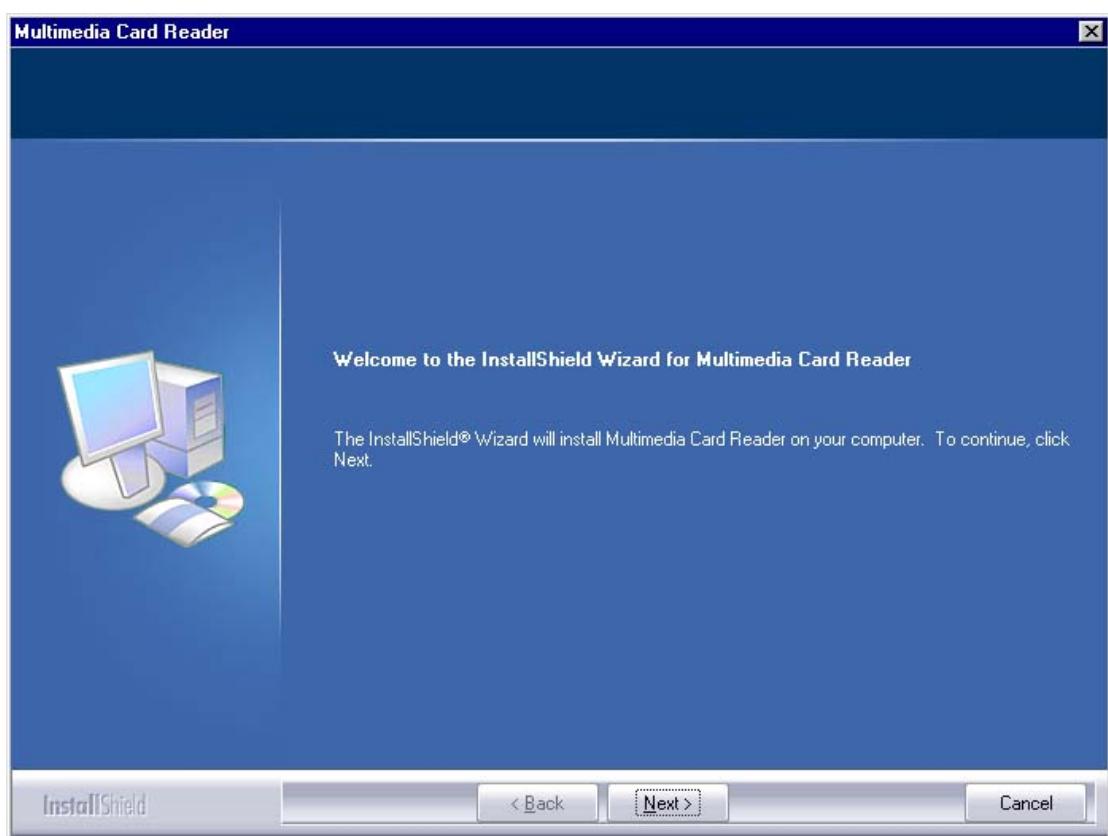


3. Reboot is required.

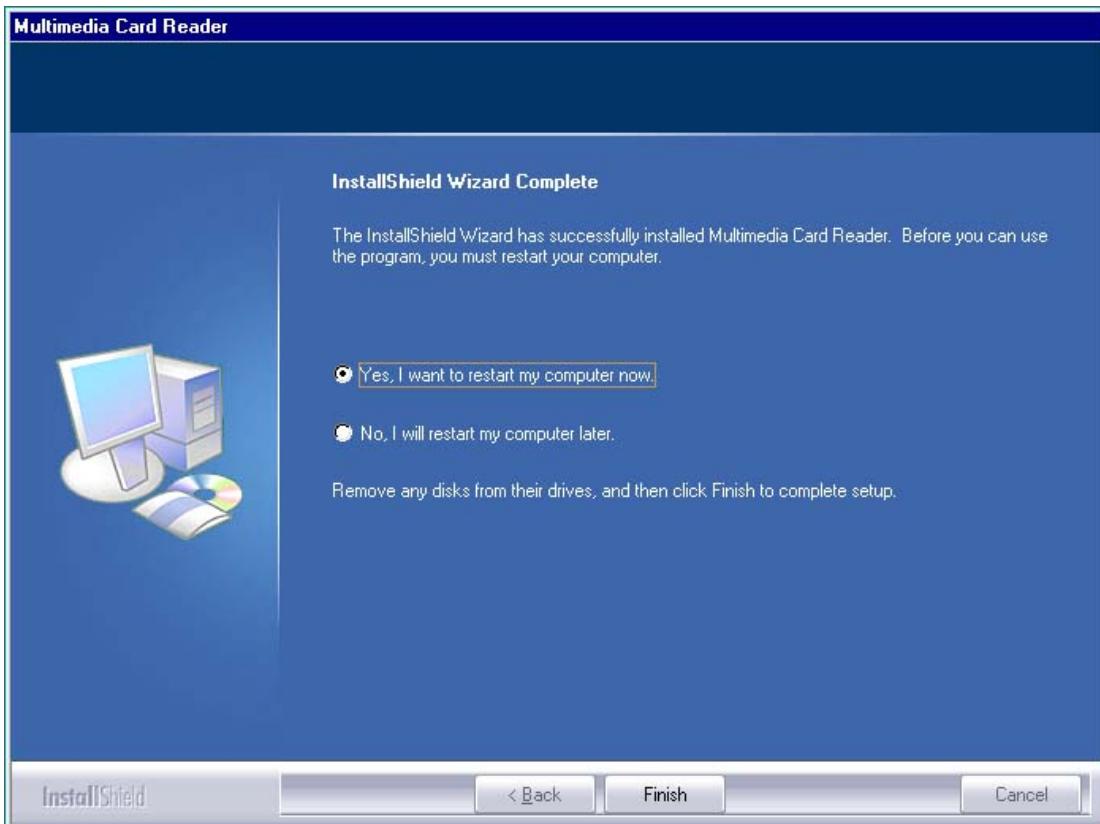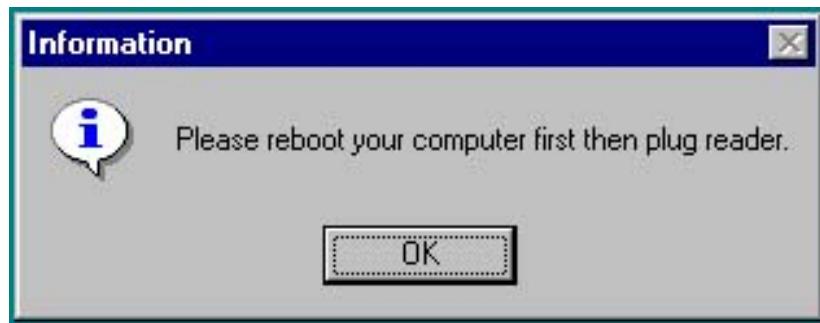

4. After the reboot, you will see five removable disk icons of the all-in-1 card reader on the explorer window once you connect the card reader to the PC. The disk drive letters (F:~J:) in the figure shown below are determined by the PC's configuration which may vary. But the sequence of removable disk drive is fixed as

- (1) SD (2) CF (3) SMC/XD (4) MS (5) Micro SD

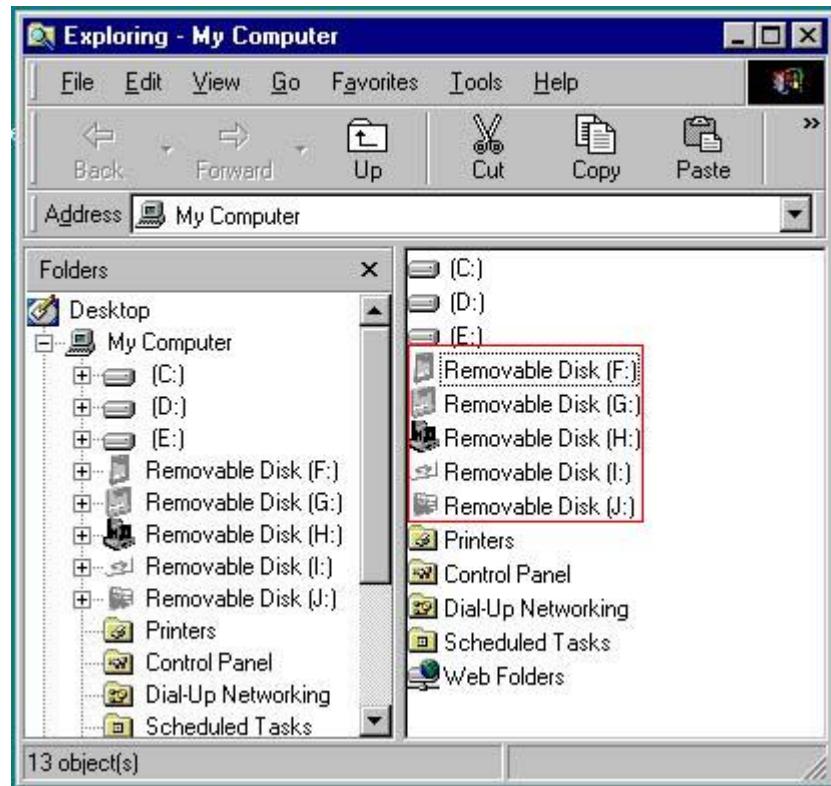

For Windows XP/2000 system, drivers are provided by the operating systems, no vendor-supplied driver needed. The card reader will be recognized by OS automatically once it is connected.

But it is recommended to perform the installation of AP as an update, to take the advantage of the visual icon identification

of the card sockets. However, it is not a must for these two OS.


Before you install this driver, please make sure that the card reader is plugged into the PC, otherwise the driver installation will fail.

The installation steps Under Windows XP/2000 is similar to the installation steps Under Windows 98, please refer to the installation steps above and reboot your computer, then you will see five visual disk icons as below.



When you insert the memory card to the slot, please pay attention to the side of the card.

There are four card slots on the card-reader panel as below, only the CF & MD & M2 three cards should be head on.

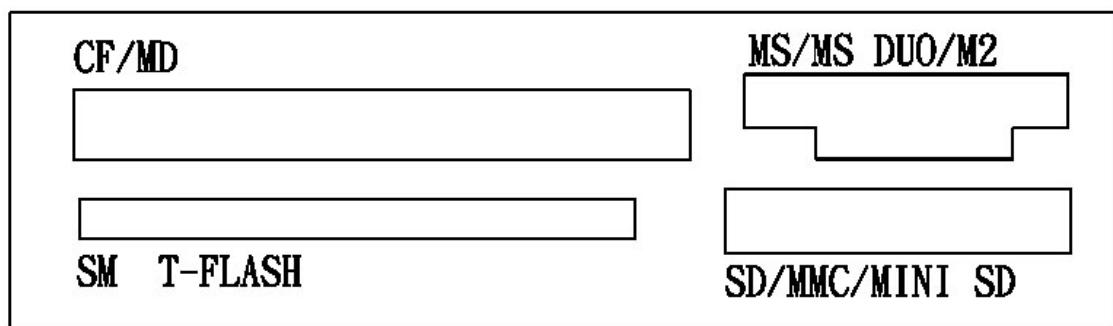

Now the whole installation is done, thank you very much for using our product, we hope that our product can bring more convenience for you!



гарантия бесперебойности производства и
качества выпускаемой продукции

О компании

ООО "ТрейдЭлектроникс" - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Наличие собственной эффективной системы логистики обеспечивает надежную поставку продукции по конкурентным ценам в точно указанные сроки.

Срок поставки со стоков в **Европе и Америке – от 3 до 14 дней.**

Срок поставки из **Азии – от 10 дней.**

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Предоставляем спец цены на элементы для создания инженерных сэмплов.

Упорный труд, качественный результат дают нам право быть уверенными в себе и надежными для наших клиентов.

Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование

Наша организация особенно сильна в поставках модулей, микросхем, пассивных компонентов, ксайленсах (ХС), EPF, EPM и силовой электроники.

Большой выбор предлагаемой продукции, различные виды оплаты и доставки, позволят Вам сэкономить время и получить максимум выгоды от сотрудничества с нами!

Перечень производителей, продукцию которых мы поставляем на российский рынок

AMD

ANALOG DEVICES

BOURNS

Coilcraft
The world's largest manufacturer of magnetic components

élan tec
Semiconductor, Inc.

HARRIS

infineon

JRC

MICREL
Innovation through Technology™

MOTOROLA

nichicon

PHILIPS

ROHM

ST SGS-THOMSON
Microelectronics

Sipex

TAIYO YUDEN

TOKO

ZILAS

Winbond
Electronics Corp.

Allegro
MicroSystems, Inc.

ATMEL

BURR - BROWN
BB

EXAR

HITACHI
Inspire the Next

intel

Lattice
Semiconductor Corporation

muRata
Leader in Electronics

OKI

QUALCOMM

SAMSUNG

SHARP

SONY

TDK

TOSHIBA

XORX

ALTERA

AVX
Components

CATALYST

CYPRESS
TECHNOLOGY

FAIRCHILD
SEMICONDUCTOR

HOLTEK

International IOR Rectifier

LINEAR TECHNOLOGY
mitsubishi

National Semiconductor

ON Semiconductor
UN

REALTEK
Radish Semiconductor Corp.

SANYO

SHINDENGEN

SS

TECCOR
ELECTRONICS

TUNDRA

XILINX

Amphenol

Bay Linear

CIRRUS LOGIC

DALLAS

FUJITSU

IDT

intersil

MAXIM

molex

NEC

Panasonic

RENESAS

SII
Silico Instruments Inc.

SIEMENS

ST

TEXAS INSTRUMENTS

VISHAY

ZETEX
SEMICONDUCTORS



гарантия бесперебойности производства и
качества выпускаемой продукции

С удовольствием будем прорабатывать для Вас поставки всех необходимых компонентов по текущим запросам для скорейшего выявления групп элементов, по которым сотрудничество именно с нашей компанией будет для Вас максимально выгодным!

С уважением,

Менеджер отдела продаж ООО

«Трейд Электроникс»

Шишлаков Евгений

8 (495)668-30-28 доб 169

manager28@tradeelectronics.ru

<http://www.tradeelectronics.ru/>